



wipro advantage



COMMERCIAL & INSTITUTIONAL LIGHTING RANGE

PRICE LIST 2024

wef: January 01, 2024



www.wiprolighting.com | Toll free no: 1800 425 1969 | helpdesk.lighting@wipro.com

Registered Office: Wipro Enterprises (P) Ltd.
"Wipro House", No. 8, 7th Main, 80 Feet Road,
Koramangala, 1st Block, Bangalore 560034

Business Office: Wipro Lighting,
5th Floor, Godrej Eternia-C, Old Pune-Mumbai
Highway, Shivajinagar, Pune 411005
(T) 020 66098700, (F) 020 66098777



Branches: Ahmedabad | Bangalore | Bhubaneswar | Chandigarh | Chennai | Cochin | Coimbatore | Hyderabad | Indore | Jaipur | Kolkata
Lucknow | Mumbai | Nagpur | New Delhi | Pune | Raipur | Vishakhapatnam

Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in parts or in whole, without permission, is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.

Follow us on



Our 30+ year journey in lights is now no longer about just lights. At Wipro Lighting, we believe that innovation is in our DNA. From setting new benchmarks in landscape lighting, to being the first lighting company to be associated with the green movement; to so much more. It is lighting that does far more than ordinary lighting is capable of far more than most envision lights can do.

Our customer-centric approach to solutioning has been our biggest inspiration to innovate. Today, Wipro Lighting provides best-in-class commercial and institutional lighting solutions.

The ever-evolving Wipro Lighting range includes



High efficiency
LED luminaires



Lighting
management
systems



Lighting for
green buildings



High efficacy
solutions for
industrial lighting



Complete outdoor,
streetlight &
floodlight range

The **Internet of Lighting (IoL)**® platform by Wipro Lighting provides comprehensive, smart & connected lighting solutions, for indoor and outdoor lighting applications.

Wipro Lighting is proud to be the leader in lighting for green buildings. In fact, we have a 55% share in the category. We are committed to lead the transition to a greener approach for all development, to create possibilities for a brighter future and a cleaner planet.

inForm™

inSync™

iSense
INTELLIGENT WIRELESS IoT SYSTEM



Modern Workspaces

Suspended Luminaires **05**

Recessed Luminaires **17**

Downlighters **25**

FOKUS+ **27**



IoL (Internet of Lighting)

inSync™ **37**

LMS **41**

iSense™ **43**

eSense **49**

Industry 5.0 **51**



Industrial Lighting

Cleanroom & Sterile Areas **55**

Manufacturing Plants & Industries **59**

Blazeline™ **67**

Frostline **73**



Outdoor Lighting

Streetlight **79**

Floodlight **83**

Olympus: Range of Sports Lighting **87**

ASPIRE: Range of Tunnel Lighting **89**

Landscape Lighting **91**

Arcus Prime™: Architectural Lighting **97**




SolaRISE **105**



Phased-out Products **107**

Terms and Conditions **111**

Branch Offices **Inside back page**

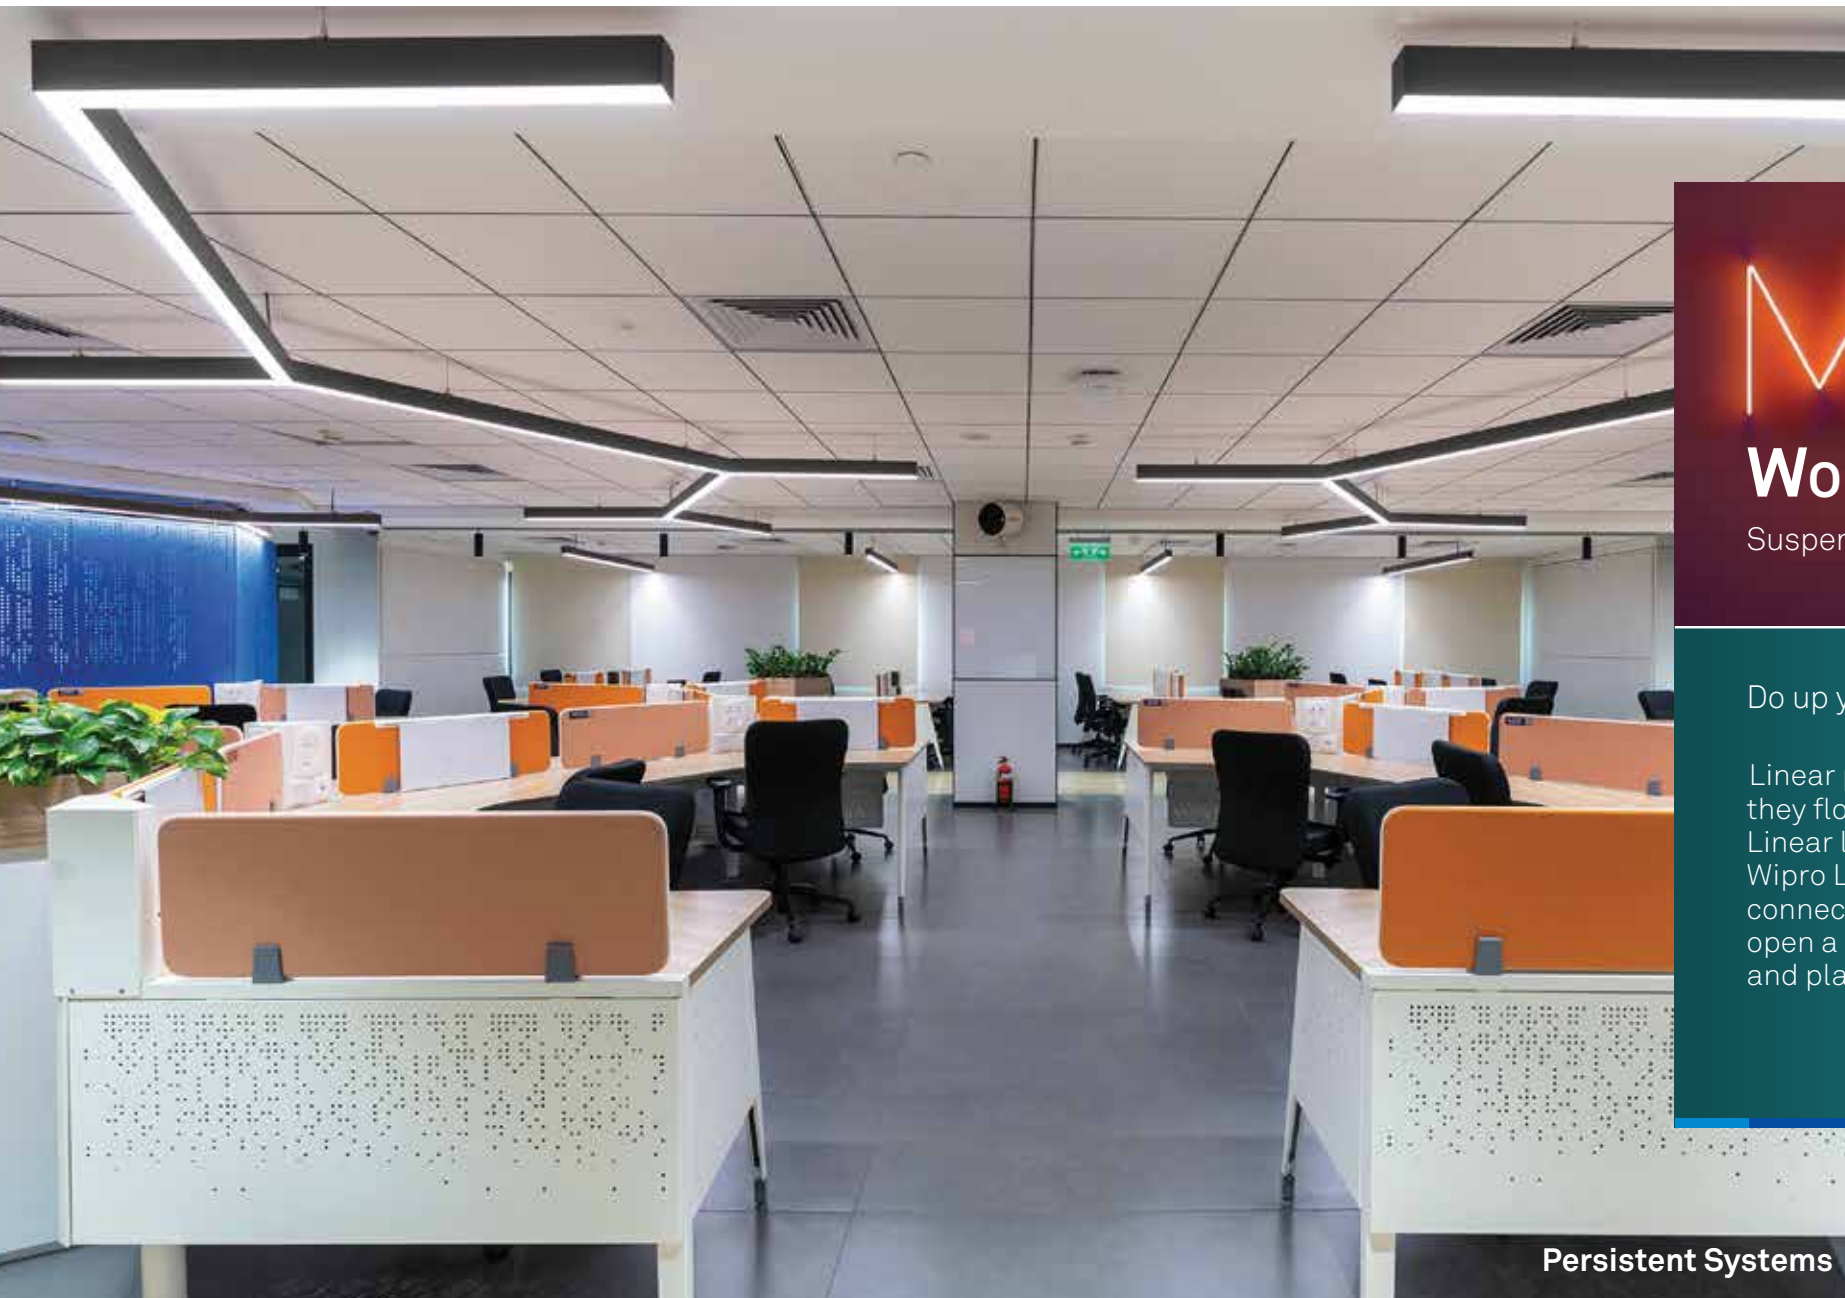


MODERN WORKSPACES

Suspended Luminaires

Do up your offices in style

Linear profiles are best to use, when they flow with the lines in architecture. Linear lighting solution by Wipro Lighting, looks exciting with the connectivity options it offers. It does open a lot of avenues to experiment and play with light.

Persistent Systems

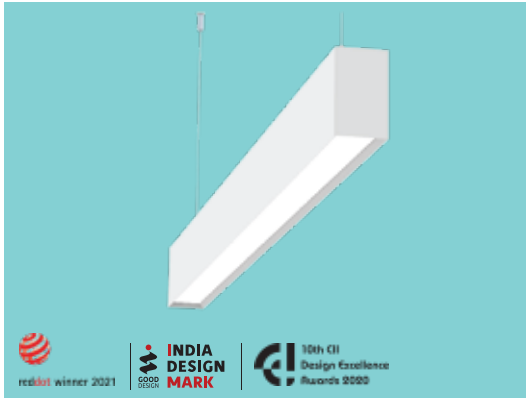


Stylus | LM43 (Down)

Linear suspended luminaire with inset 12mm profile and glare controlled beam angle, for visual balance.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-161-XXX-57-WX	10W	5700K	600mm	₹7,050
LM43-241-XXX-57-WX	15W	5700K	900mm	₹9,950
LM43-321-XXX-57-WX	20W	5700K	1200mm	₹13,150
LM43-481-XXX-57-WX	30W	5700K	1800mm	₹16,550
LM43-651-XXX-57-WX	40W	5700K	2400mm	₹20,650

- Also available with option of black housing, 4000K CCT, DALI dimmable and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11

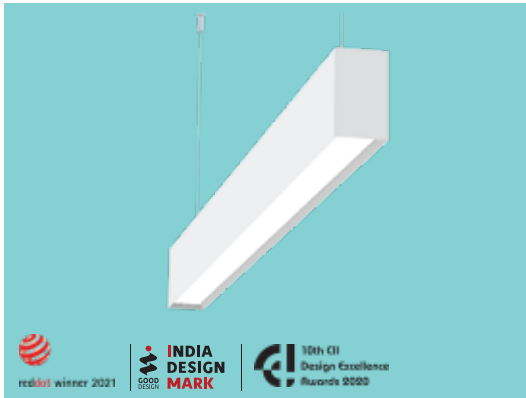


Stylus | LM43 (Up/down)

Linear suspended luminaire with inset 12mm profile and glare controlled beam angle, for visual balance.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-251-XXX-57-WX	15W	5700K	600mm	₹9,350
LM43-361-XXX-57-WX	20W	5700K	900mm	₹11,490
LM43-491-XXX-57-WX	30W	5700K	1200mm	₹19,690
LM43-731-XXX-57-WX	45W	5700K	1800mm	₹20,950
LM43-971-XXX-57-WX	60W	5700K	2400mm	₹23,050

- Also available with option of black housing, 4000K CCT, DALI dimmable and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11

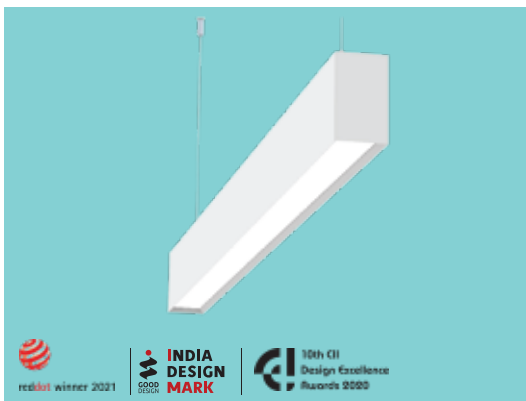

Stylus | LM43 (HL)

Linear suspended luminaire with inset 12mm profile and glare controlled beam angle, for visual balance.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-221-XXX-57-WX	15W	5700K	600mm	₹8,390
LM43-331-XXX-57-WX	20W	5700K	900mm	₹12,190
LM43-451-XXX-57-WX	30W	5700K	1200mm	₹20,850
LM43-671-XXX-57-WX	45W	5700K	1800mm	₹21,850
LM43-901-XXX-57-WX	60W	5700K	2400mm	₹23,750

- HL - High Lumens
- Also available with option of black housing, 4000K CCT, DALI dimmable and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11



Stylus MPO-UGR | LM43 (Down)

Linear profiles with micro precision optics are the most preferred option for soft glow and low glare in workspaces.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-211XXX-57UGWX	15W	5700K	600mm	₹11,250
LM43-421XXX-57UGWX	20W	5700K	900mm	₹14,350
LM43-451XXX-57UGWX	30W	5700K	1200mm	₹21,290
LM43-841XXX-57UGWX	45W	5700K	1800mm	₹24,650
LM43-102XXX-57UGWX	60W	5700K	2400mm	₹27,890

- Also available with option of black housing, 4000K CCT, DALI dimmable and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11




Stylus MPO-UGR | LM43 (Up/down)

Linear profiles with micro precision optics are the most preferred option for soft glow and low glare in workspaces.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-251XXX-57UGWX	15W	5700K	600mm	₹13,790
LM43-361XXX-57UGWX	20W	5700K	900mm	₹16,650
LM43-491XXX-57UGWX	30W	5700K	1200mm	₹20,750
LM43-731XXX-57UGWX	45W	5700K	1800mm	₹24,990
LM43-971XXX-57UGWX	60W	5700K	2400mm	₹27,250

- Also available with option of black housing, 4000K CCT, DALI dimmable and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11

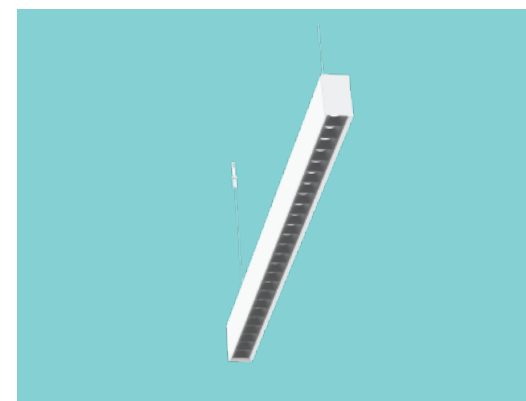


Stylus Collimator Lens | LM43

Linear profiles with collimator lens are the most preferred option for the critical tasks workspace. The ideal lighting solution for green building gives UGR ≤ 6

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-271-045-57-WX	20W	5700K	1200mm	₹21,390
LM43-541-045-57-WX	40W	5700K	2400mm	₹31,340

- Also available with option of black housing, DALI Dimmable, 4000K CCT and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11

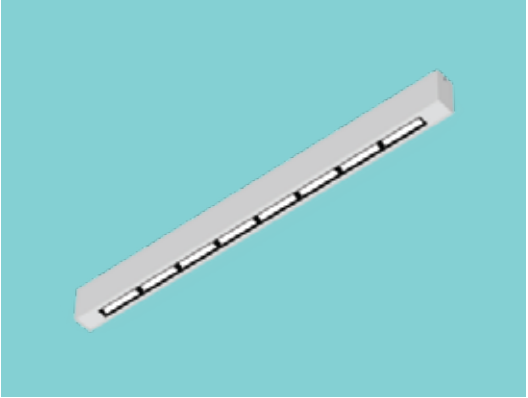


Stylus Asymmetric | LM43

Linear profiles with asymmetric reflector optics.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-271-A45-57-WX	20W	5700K	1200mm	Price on Request
LM43-541-A45-57-WX	40W	5700K	2400mm	

- Also available with option of black housing, DALI Dimmable, 4000K CCT and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11

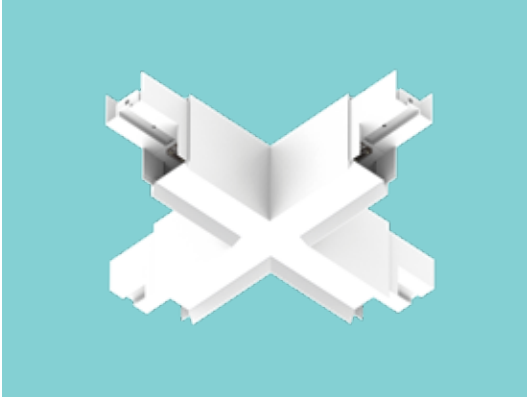


Stylus Angular | LM43

Unique connectors to create V, Y, L, T and + shape patterns with seamless connectivity.

Catalogue Reference No.	Shape	Wattage	CCT	LP ₹
LM43-161-90L57-CTW	90°L	10W	5700K	Price on Request
LM43-221-90L57-CTW	90°L	15W	5700K	
LM43-161-120V57CTW	120°V	10W	5700K	
LM43-221-120V57CTW	120°V	15W	5700K	
LM43-241-120Y57CTW	120°Y	15W	5700K	
LM43-331-120Y57CTW	120°Y	22W	5700K	
LM43-241-90T57CTW	90°T	15W	5700K	
LM43-331-90T57CTW	90°T	22W	5700K	
LM43-321-90+57-CTW	90°+	20W	5700K	
LM43-451-90+57-CTW	90°+	30W	5700K	

- Arm length - 300mm
- Also available in black housing, DALI Dimmable, 4000K CCT and in continuous variant
- Suspension to be ordered separately. Refer to page no. 11

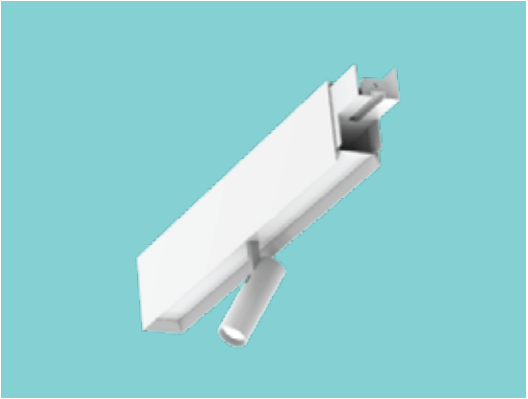

Stylus with Tracklight | LM43

Integrated tracklight with precise beam angle in linear profile.

Catalogue Reference No.	Wattage	CCT	LP ₹
LM43-161-030-57-WX	10W	5700K	Price on Request

- Arm length - 600mm
- Also available in 4000K CCT and black colour housing option
- Suspension to be ordered separately. Refer to page no. 11




Stylus Nodal | LM43

Central downlight to connect linear fittings.

Catalogue Reference No.	Wattage	CCT	LP ₹
LM43-161XXX-57SDW	10W	5700K	₹ 4,250

- Also available in 4000K CCT and black colour housing option
- Suspension to be ordered separately. Refer to page no. 11

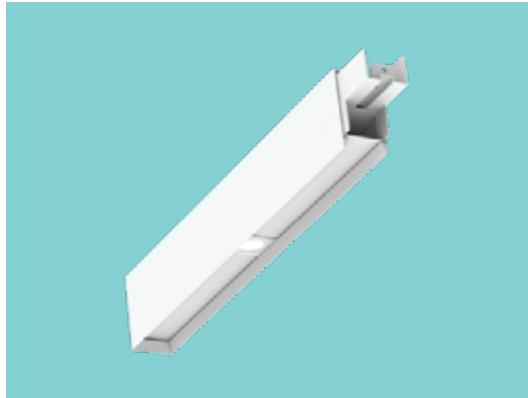


Stylus with Gimball | LM43

Integrated downlighter with precise beam angle in linear profile.

Catalogue Reference No.	Wattage	CCT	LP ₹
LM43-701-055-57-WC	5W	5700K	Price on Request

- Arm length - 600mm
- Also available in black housing variant
- Suspension to be ordered separately. Refer to page no.11

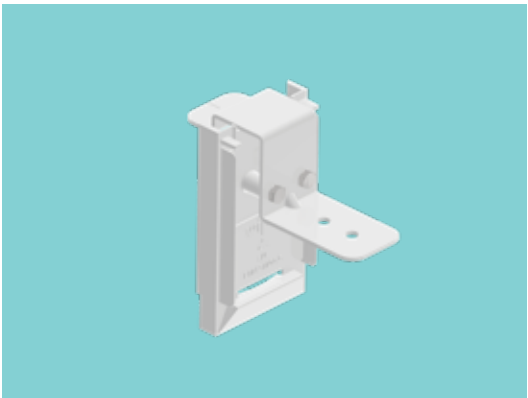

Stylus Endcap | LM43

Ensures perfect locking.

Catalogue Reference No.	Connection	LP ₹
LM43M07C-MTG-WH	For linear to linear	₹ 690
LM43M06A-MTG-WH	For nodal to linear	₹ 890



Suspension for Stylus | LMX43

Universal suspension system with quick onsite adjustment: mounting with 2 suspensions from the ceiling.

Catalogue Code	Description	LP ₹
LMX431	1.0 mtr. suspension suitable for installation on RCC ceiling	₹ 1,050
LMX432	1.0 mtr. suspension suitable for installation on modular Prelude 24mm ceiling	₹ 1,150
LMX433	1.0 mtr. suspension suitable for installation on modular grid, Silhouette 15mm ceiling system	₹ 1,590

• 2no's suspension in single set




Suspension for Stylus Nodal | LMX77

Universal suspension system with quick onsite adjustment: mounting with 1 suspension from the ceiling.

Catalogue Code	Description	LP ₹
LMX774	1.0 mtr. suspension suitable for installation on RCC ceiling	₹ 750
LMX775	1.0 mtr. suspension suitable for installation on modular Prelude 24mm ceiling	₹ 890
LMX776	1.0 mtr. suspension suitable for installation on modular grid, Silhouette 15mm ceiling system	₹ 950

• 1no's suspension in single set

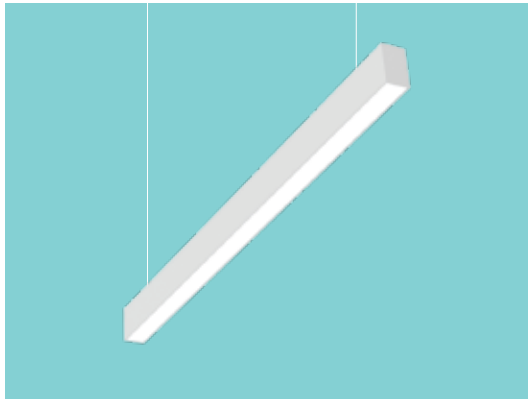

Axeon+ | LM34 (Up/down)

Linear lighting solution with extruded aluminium housing and high transmissivity HET diffuser, for standalone and continuous variant.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM34-361-XXX-57WG2	20W	5700K	1200mm	₹13,590
LM34-721-XXX-57WG2	40W	5700K	2400mm	₹22,350

• Also available with option of black housing, continuous variant, DALI dimmable & 4000K CCT
• Suspension to be ordered separately. Refer to page no. 13




Stylus Surface | LM43

Linear surface luminaire with inset 12mm profile and glare controlled beam angle for visual balance.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM43-321-XXX-57SWX	20W	5700K	1200mm	Price on Request
LM43-651-XXX-57SWX	40W	5700K	2400mm	Price on Request

• Available in 600mm, 900mm, 1200mm, 1800mm & 2400mm length
• Also available in high lumens, UGR black housing, 4000K CCT and in continuous variant

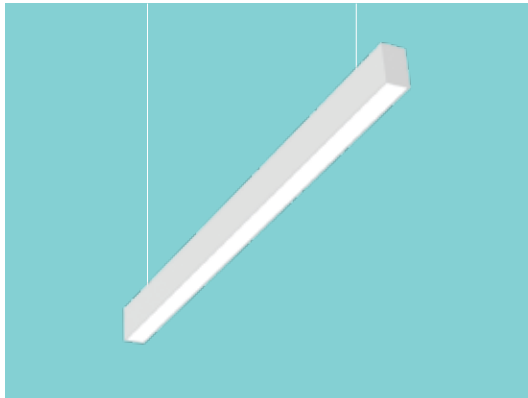


Axeon+ UGR | LM34 (Up/down)

Linear lighting solution with extruded aluminium housing and high transmissivity UGR diffuser, for standalone and continuous variant.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM34-361-XXX57UWG2	20W	5700K	1200mm	₹15,590
LM34-721-XXX57UWG2	40W	5700K	2400mm	₹24,350

• Also available with option of black housing, continuous variant, DALI dimmable & 4000K CCT
• Suspension to be ordered separately. Refer to page no. 13

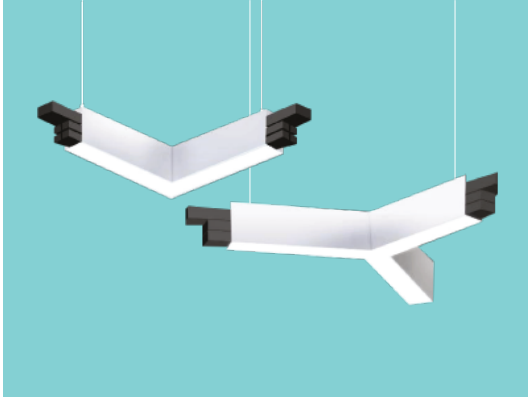

Axeon+ Angular | LM34

Unique connectors to create V, Y, L, T and + shape patterns with seamless connectivity.

Catalogue Reference No.	Shape	Wattage	CCT	LP ₹
LM34-930-90L57WCG2	90°L	10W	5700K	₹7,870
LM34-930-60V57WCG2	60°V	10W	5700K	₹8,240
LM34-930120V57WCG2	120°V	10W	5700K	₹8,320
LM34-141120Y57WCG2	120°Y	15W	5700K	₹10,300
LM34-930-90T57WCG2	90°T	15W	5700K	₹9,770
LM34-930-90+57WCG2	90°+	20W	5700K	₹14,330

- Also available with option of black housing, DALI dimmable & 4000K CCT
- Suspension to be ordered separately. Refer to the suspension table below
- Arm length - 300mm



Suspension for Axeon+ | LMX34

Universal suspension system with quick onsite adjustment: mounting with 2 suspensions from the ceiling.

Catalogue Code	Description	LP ₹
LMX347	1.0 mtr. suspension suitable for installation on RCC ceiling	₹ 670
LMX348	1.0 mtr. suspension suitable for installation on modular Prelude 24mm ceiling	₹ 850
LMX349	1.0 mtr. suspension suitable for installation on modular grid, Silhouette 15mm ceiling system	₹ 950

- 2no's suspension in single set




Axeon+ G2L | LM34 (Down)

Linear lighting solution with extruded aluminium housing and high transmissivity HET/UGR diffuser.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM34-101-XXX57WG2L	10W	5700K	600mm	₹4,560
LM34-181-XXX57WG2L	15W	5700K	750mm	₹4,660
LM34-201-XXX57WG2L	15W	5700K	900mm	₹5,950
LM34-251-XXX57WG2L	20W	5700K	1200mm	₹6,640
LM34-401-XXX57WG2L	30W	5700K	1200mm	₹6,780
LM34-411-XXX57WG2L	30W	5700K	1800mm	₹10,100
LM34-501-XXX57WG2L	40W	5700K	2400mm	₹12,020
LM34-801-XXX57WG2L	60W	5700K	2400mm	₹12,960

- Also available with option of black housing, DALI dimmable, 4000K CCT and UGR Diffuser
- Suspension included with the product

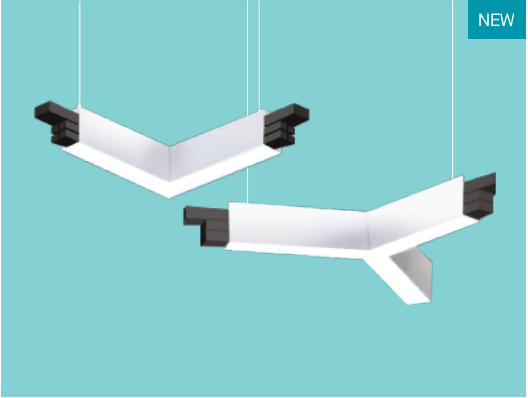

Axeon+ Angular | LM34 G2L

Unique connectors to create V, Y, L, T and + shape patterns with seamless connectivity.

Catalogue Reference No.	Shape	Wattage	CCT	LP ₹
LM34-930-90L57WG2L	90°L	10W	5700K	₹7,150
LM34-930-60V57WG2L	60°V	10W	5700K	₹7,320
LM34-930-12V57WG2L	120°V	10W	5700K	₹7,250
LM34-141-12Y57WG2L	120°Y	15W	5700K	₹9,890
LM34-930-90T57WG2L	90°T	15W	5700K	₹9,850
LM34-930-90+57WG2L	90°+	15W	5700K	₹12,620

- Also available with option of black housing, DALI dimmable, 4000K CCT and UGR Diffuser
- Available in shapes L, V, Y, T and +; 300mm arm length
- Suspension included with the product




Axeon Surface | LM34

Linear lighting solution with extruded aluminium housing and high transmissivity HET diffuser with Surface mounting installation.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM34-251XXX57SMWG1	20W	5700K	1200mm	Price on Request
LM34-401XXX57SMWG1	30W	5700K	1200mm	
LM34-501XXX57SMWG1	40W	5700K	2400mm	
LM34-801XXX57SMWG1	60W	5700K	2400mm	

- Available in 600mm, 1200mm, 1800mm & 2400mm length
- Also available in black housing, 4000K CCT

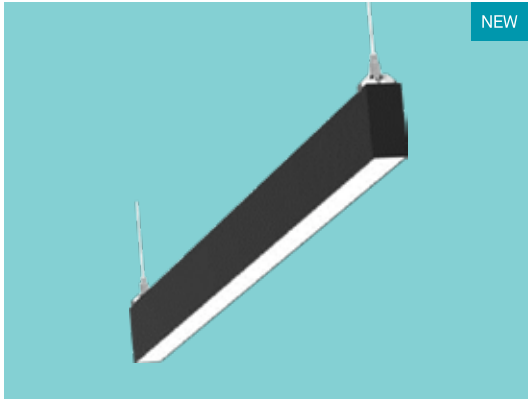


Inspiro Suspended | LM04 (Down)

Slim Linear lighting solution with HET/UGR diffuser for contemporary workspaces. Extruded aluminium housing for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-201-XXX-57PWX	15W	5700K	600mm	₹5,050
LM04-401-XXX-57PWX	30W	5700K	1200mm	₹6,250
LM04-601-XXX-57PWX	45W	5700K	1800mm	₹8,250
LM04-801-XXX-57PWX	60W	5700K	2400mm	₹10,550

- Also available with option of black housing, continuous option, DALI dimmable, 4000K CCT and UGR Diffuser
- Accessories required to convert std. to CT: LM04S13C & LM04M15C-CP
- Order suspension separately Refer to page no.16
- For surface mounting/ Data center application charge DWX: WNT

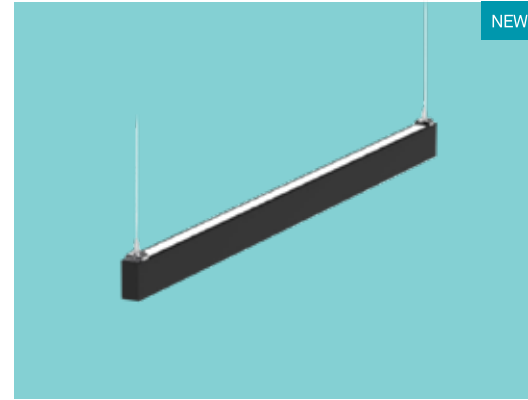

Inspiro Pendant - Symmetric Collimator | LM04 (Up/Down)

Slim Linear lighting solution with collimator lens for contemporary workspaces. Extruded aluminium housing with collimator lens, for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-281-45-57-PWX	15W	5700K	600mm	₹7,050
LM04-551-45-57-PWX	30W	5700K	1200mm	₹13,550

- Also available with option of black housing, continuous option, DALI dimmable, 4000K CCT and UGR Diffuser
- For continuous option convert PWX to PWC
- Order suspension separately Refer to the suspension table below




Inspiro Suspended | LM04 (Up/down)

Slim Linear lighting solution with HET/UGR diffuser for contemporary workspaces. Extruded aluminium housing for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-211-XXX-57PWX	15W	5700K	600mm	₹5,150
LM04-411-XXX-57PWX	30W	5700K	1200mm	₹7,050
LM04-511-XXX-57PWX	45W	5700K	1800mm	₹9,650
LM04-811-XXX-57PWX	60W	5700K	2400mm	₹13,350

- Also available with option of black housing, continuous option, DALI dimmable, 4000K CCT and UGR Diffuser
- Accessories required to convert std. to CT: LM04S13C & LM04M15C-CP
- Order suspension separately Refer to page no.16

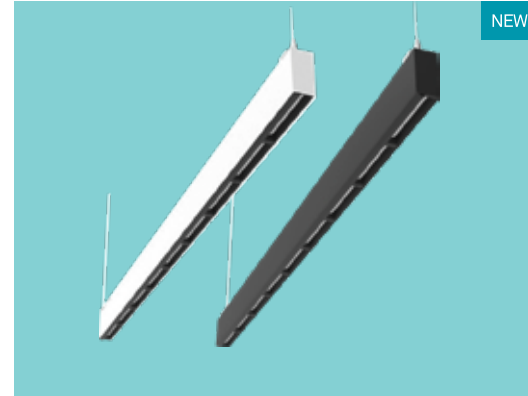

Inspiro Pendant - Asymmetric Collimator | LM04 (Down)

Slim Linear lighting solution with asymmetric lens for contemporary workspaces. Extruded aluminium housing with asymmetric lens, for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-261-ASM-57PWX	10W	5700K	600mm	₹7,550
LM04-561-ASM-57PWX	20W	5700K	1200mm	₹13,050

- Also available with option of black housing, continuous option, DALI dimmable, 4000K CCT and UGR Diffuser
- For continuous option convert PWX to PWC
- Order suspension separately Refer to the suspension table below



Inspiro Pendant - Symmetric Collimator | LM04 (Down)

Slim Linear lighting solution with collimator lens for contemporary workspaces. Extruded aluminium housing with collimator lens, for standalone and seamless end-to-end connectivity

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-261-45-57-PWX	10W	5700K	600mm	₹7,090
LM04-561-45-57-PWX	20W	5700K	1200mm	₹12,950

- Also available with option of black housing, continuous option, DALI dimmable, 4000K CCT and UGR Diffuser
- For continuous option convert PWX to PWC
- Order suspension separately Refer to page no.16



Suspension for Inspiro | LMX34

Universal suspension system with quick onsite adjustment: mounting with 2 suspensions from the ceiling.

Catalogue Code	Description	LP ₹
LMX341	1.0 mtr. suspension suitable for installation on RCC ceiling	₹ 850
LMX342	1.0 mtr. suspension suitable for installation on modular Prelude 24mm ceiling	₹ 950
LMX343	1.0 mtr. suspension suitable for installation on modular grid, Silhouette 15mm ceiling system	₹ 950

- 2no's suspension in single set




MODERN WORKSPACES

Recessed Luminaires

Our recessed lighting fits attractively into all kinds of ceilings and can be utilized for commercial, office, and retail spaces. Recessed luminaires offer the opportunity to transform your workplace into something extraordinary while taking care of your illuminating needs.

Using recessed lighting can accentuate cabins and workstations, highlight artwork, create dramatic shadows, and give the workplace a clean, sophisticated and well-lit look.

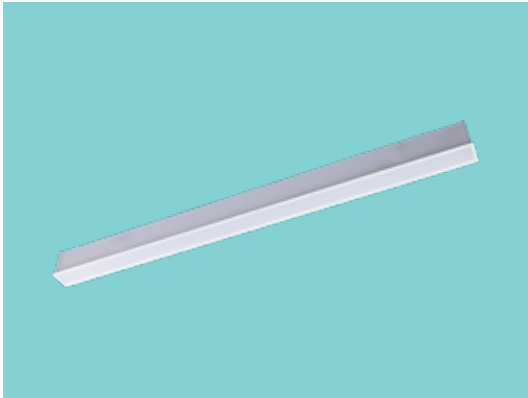


Axeon Recess | LM34

Linear lighting solution for contemporary workspaces. Extruded aluminium housing with high transmissivity HET diffuser, for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM34-251XXX-57RMG1	20W	5700K	1200mm	₹ 9,450
LM34-251XX-57RMCG1	20W	5700K	1200mm	₹ 9,550
LM34-401XXX-57RMG1	30W	5700K	1200mm	₹ 10,290
LM34-401XX-57RMCG1	30W	5700K	1200mm	₹ 10,750
LM34-501XXX-57RMG1	40W	5700K	2400mm	₹ 16,890
LM34-501XX-57RMCG1	40W	5700K	2400mm	₹ 16,990
LM34-801XXX-57RMG1	60W	5700K	2400mm	₹ 19,790
LM34-801XX-57RMCG1	60W	5700K	2400mm	₹ 19,890

• Also available with option of 4000K CCT and DALI dimmable

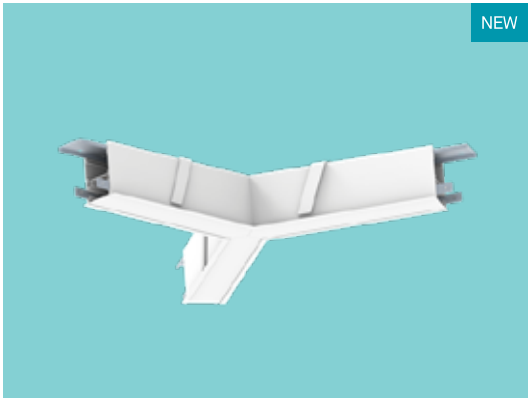

Axeon Recess Angular | LM34

Unique connectors to create V, Y, L, T and + shape patterns with seamless connectivity.

Catalogue Reference No.	Wattage	CCT	Shape	LP ₹
LM34141-90L57RMCG1	10W	5700K	90° Y	Price on Request
LM34141-60V57RMCG1	10W	5700K	60° V	
LM34141120V57RMCG1	10W	5700K	120° V	
LM34211120Y57RMCG1	15W	5700K	120° Y	
LM34211-90T57RMCG1	15W	5700K	90° T	
LM34281-90+57RMCG1	20W	5700K	90° +	

• Arm length - 300mm
• Also available with option of DALI dimmable & 4000K CCT



Inspiro Recessed | LM04

Slim recessed linear lighting solution for contemporary workspaces. Extruded aluminium housing with high transmissivity HET diffuser, for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-151-XXX-57RWX	10W	5700K	600mm	₹5,290
LM04-151-XXX-57RWC	10W	5700K	600mm	₹5,920
LM04-301-XXX-57RWX	20W	5700K	1200mm	₹10,580
LM04-301-XXX-57RWC	20W	5700K	1200mm	₹11,840

• Also available with option of 4000K CCT and black housing colour
• Also available with option of UGR diffuser and DALI dimmable



Inspiro Recessed Symmetric Collimator | LM04

Slim recessed linear lighting solution with collimator lens for contemporary workspaces. Extruded aluminium housing with collimator lens, for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-801-45-57-RWX	5W	5700K	150mm	₹2,550
LM04-161-45-57-RWX	5W	5700K	280mm	₹2,570
LM04-261-45-57-RWX	10W	5700K	545mm	₹5,100
LM04-261-45-57-RWC	10W	5700K	538mm	₹5,150
LM04-561-45-57-RWX	20W	5700K	1207mm	₹10,210
LM04-561-45-57-RWC	20W	5700K	1200mm	₹10,300

• Also available in 4000K CCT and black housing colour, UGR DALI dimmable
• RWX: Standalone
• RWC: Connecting



Inspiro Recessed Asymmetric Collimator | LM04

Slim recessed linear lighting solution with asymmetric lens for contemporary workspaces. Extruded aluminium housing with asymmetric lens, for standalone and seamless end-to-end connectivity.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM04-801ASM-57-RWX	5W	5700K	150mm	₹2,900
LM04-161ASM-57-RWX	5W	5700K	280mm	₹2,920
LM04-261ASM-57-RWX	10W	5700K	545mm	₹5,400
LM04-261ASM5-57-RWC	10W	5700K	538mm	₹5,450
LM04-561ASM-57-RWX	20W	5700K	1207mm	₹10,410
LM04-561ASM-57-RWC	20W	5700K	1200mm	₹10,500

• Also available in 4000K CCT and black housing colour, UGR DALI dimmable
• RWX: Standalone
• RWC: Connecting



Aura | CRC013

Recessed/surface mounted LED 4X1 luminaire, full diffuser provides uniform light.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
CRC013R036HP57GL1	36W	5700	₹ 7,650
CRC013R038HP57GL1	30W	5700	₹ 7,350
CRC013S036HP57GL1	36W	5700	₹ 8,190
CRC013S038HP57GL1	30W	5700	₹ 8,090

• Cutout dimensions: 1195mm x 295mm
• 'R' represents recess and 'S' represents surface mounting
• Frame: 9180P01377 to be ordered separately for installation in POP/gypsum ceiling
• Also available in 4000K CCT and black housing colour, UGR DALI dimmable




NEW

Aura Slim | CRCO18

Surface mounted LED 4X1 luminaire, full diffuser provides uniform light

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
CRCO18S036HP57	36W	5700	₹ 4,680
CRCO18S036HP57UG	36W	5700	₹ 4,780

- Also available with option of 4000K CCT and DALI dimmable
- UG: UGR

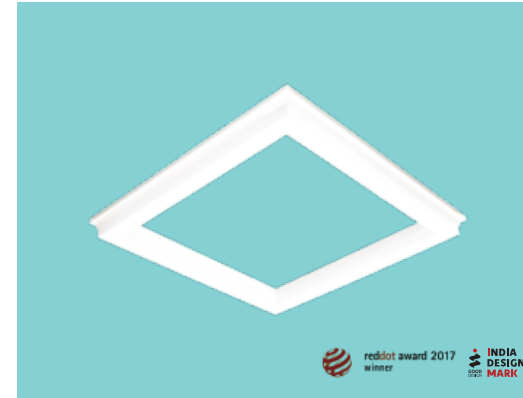

Verge 2X2 | LM29

Our high-efficiency, recess mounted, luminaire with its minimalistic design, integrates into the ceiling, creating a unique, volumetric lighting experience

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LM29-451-XXX-57-XX	33W	5700	₹ 8,050
LM29-451-XXX-57RCC	33W	5700	₹ 9,210
LM29-451-XXX-57GRD	33W	5700	₹ 9,480

- Also available in 4000K CCT, DALI dimmable and white color tunable
- RCC suffix denotes suspension mounting for RCC ceiling. GRD suffix denotes suspension mounting for modular ceiling
- Frame to be ordered separately for installation in POP/gypsum ceiling
- Catalogue no. for frame is 9180P01089-LP : ₹ 1290




TZ-Techzone | LM66

Recess mounted extruded aluminium housing slim luminaire, suitable for standalone and continuous TechZone ceiling. HET diffuser for uniform homogeneous light.

Catalogue Reference No.	Wattage	CCT	Length	LP ₹
LM66-351-XXX-57-CT	20W	5700K	1200mm	₹10,760
LM66-531-XXX-57-XX	30W	5700K	1200mm	₹10,760
LM66-701-XXX-57-CT	40W	5700K	2400mm	₹21,240
LM66-102-XXX-57-XX	60W	5700K	2400mm	₹21,300

- Also available with option of 4000K CCT and UGR DALI dimmable

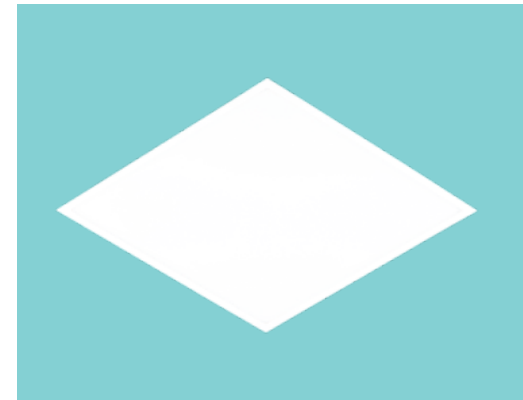

Elate 2X2 | CRCO10

Recessed/surface mounted LED luminaire with higher efficacy, full diffuser, providing uniform light

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
CRCO10R030HP57G1L1	30W	5700	₹ 6,290
CRCO10S030HP57G1L1	30W	5700	₹ 6,650
CRCO10R038HP57G1L1	36W	5700	₹ 6,390
CRCO10S038HP57G1L1	36W	5700	₹ 6,750

- 'R' represents recess and 'S' represents surface mounting. Also available in 4000K CCT
- Frame to be ordered separately for installation in POP/gypsum ceiling
- Catalogue no. for frame is 9180P01089-LP : ₹ 1290



Opus 2X2 | LM38

Opus is a high-efficiency, elegant, fluidic, and modern in design, LED luminaire with a unique, floating, spherical diffuser and surrounding light chamber that subtly introduces a circular geometry into the ceiling plane.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LM38-361-XXX-57-XX	32W	5700	₹11,850
LM38-461-XXX-57-XX	34W	5700	₹12,550
LM38-461-XXX-4057	34W	4000-5700	₹15,890

- LM38-461-XXX-4057 is a unique luminaire which has dual color CCT, available in a single luminaire
- Also available in DALI dimmable and white color tunable
- Frame to be ordered separately for installation in POP/gypsum ceiling
- Catalogue no. for frame is 9180P01089-LP : ₹ 1290



NEW

Immaculate NXG 2X2 | CRCO10

Recessed mounted full flat panel LED luminaire providing uniform light

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
CRCO10R024HP57G3	24W	5700	₹ 4,000
CRCO10R030HP57G3	30W	5700	₹ 4,400
CRCO10R036HP57G3	36W	5700	₹ 4,800
CRCO10R040HP57G3	40W	5700	₹ 5,200

- Also available with option of 4000K CCT
- Also available with option of HE, UGR & DALI dimmable
- Frame to be ordered separately for installation in POP/gypsum ceiling
- Catalogue no. for frame is 9180P01089-LP : ₹ 980
- Frame to be ordered separately for surface mounting installation
- Catalogue no. for frame is CRCO-2X2-SM-FRAME : ₹ 920



Comfort Bedlight | LW04

Extruded aluminium housing with PMMA diffuser offers personalized bidirectional up/down light for a pleasant, soothing light experience and enhanced wellbeing.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LW04-411-XXX-57-XX	31W	5700	₹ 16,050
LW04-411-XXX-57-WS	31W	5700	₹ 17,290

• Code ending with WS includes wired remote



DOWNLIGHTERS

Stunning visual experiences adding vibrancy to indoor spaces.

Commercial interior design has evolved over the past few years, creating a vast difference in workspace dynamics.

Lighting is an often overlooked and underappreciated, aspect of the business. In reality the right light has the ability to create a positive environment for more productivity and ultimately more profits. The colour of lighting possesses the power to enhance and influence the presentation in various areas: supermarkets, art galleries, etc., making them look more appealing to the eye.



FOKUS+

A rich symphony of elegance and efficiency

Fokus + is a range of downlighters for commercial spaces that adapts to core functional as well as collaborative spaces. Flexible design provides options in sizes, wattages, colour and optics as per application. Unique ring modules combines with the downlighter to achieve ambient and focused lighting effect. With our latest Fokus+ lighting solutions, we are on an odyssey to create inspiring designs, engineered to the highest standards of quality and style quotient.



NEW

Fokus+ (Round) | LD07

Deep inset recessed COB downlight for low glare, to create the perfect ambience in the space.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD07-600-040-57-WH*	6W	5700	₹ 2,640
LD07-111-040-57-WH*	9W	5700	₹ 2,640
LD07-131-040-57-WH*	12W	5700	₹ 2,840
LD07-161-038-57-WH**	15W	5700	₹ 3,570
LD07-211-038-57-WH**	18W	5700	₹ 4,120
LD07-311-026-57-WH***	24W	5700	₹ 5,340
LD07-381-026-57-WH***	30W	5700	₹ 5,650

Cutout diameter: *57mm | **78mm | ***98mm

- Acronyms: CH-Chrome finish trim, WH-White colour finish trim, RG-Rose gold finish trim, CU-Copper finish trim, BL-Black colour finish trim, GL-Gold finish trim. Replace WH with respective acronyms for trims
- 026 - 26° beam angle, 038 - 38° beam angle, 040 - 40° beam angle, 060 - 60° beam angle
- 3000K & 4000K is available as a standard option. Other beam angles are available, on request



NEW


Fokus Diffuser & Collimator Ring (with & without downlighter)

Deep inset recessed collimator ring downlight for low glare, to create the perfect ambience in the space.

Catalogue Reference No.	Wattage	CCT	Ring	LP ₹
LD07-181-XXX-57-XX	18W	5700K	Diffuser	₹ 3,680
LD07-321-026-57-WH	24W	5700K	Diffuser + downlighter	₹ 7,700
LD07-221-038-57-BL	15W	5700K	Collimator	₹ 5,240
LD07-331-038-57CHB	24W	5700K	Collimator + downlighter	₹ 9,380

• Cutout diameter: 185mm

- Acronyms: BL-Black finish trim, WH-White colour finish trim
- 026 - 26° beam angle, 038 - 38° beam angle, 040 - 40° beam angle, 050 - 50° beam angle, 060 - 60° beam angle
- 3000K & 4000K is available as a standard option. Other beam angles are available, on request

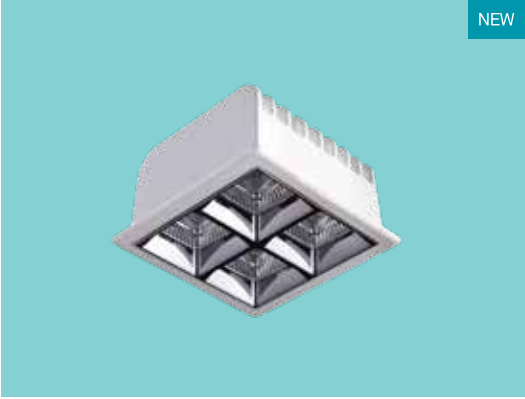

NEW


Fokus (Square) | LD34

Deep inset recessed COB downlight for low glare, to create the perfect ambience in the space.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD34-151-XXX-57-XX	12W	5700	₹ 4,750
LD34-171-XXX-57-XX	15W	5700	₹ 4,990
LD34-221-XXX-57-XX	18W	5700	₹ 5,650
LD34-251-XXX-57-XX	20W	5700	₹ 5,990

• Cutout diameter: *85mm x 85mm

- 4000K is available as a standard option. Other beam angles are available, on request

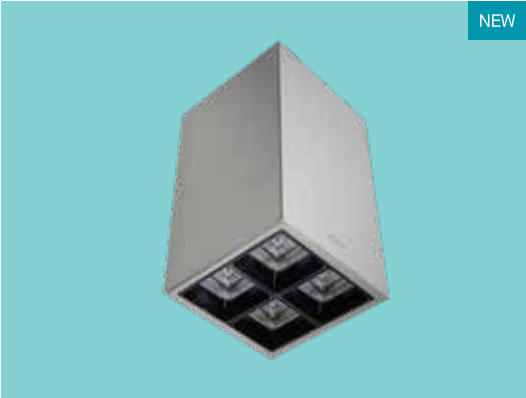

NEW

Fokus Surface (Square) | LD34

Fokus technical downlight with high performance and low glare illumination. Available in a range of variations, for every purpose.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD34-151-XXX-57-SM	12W	5700	₹ 6,850
LD34-171-XXX-57-SM	15W	5700	₹ 6,990
LD34-221-XXX-57-SM	18W	5700	₹ 7,350
LD34-251-XXX-57-SM	20W	5700	₹ 7,750

- 4000K is available as a standard option. Other beam angles are available, on request





Mollis | LD06

Mollis range with high performance and efficiency.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD06-670-XXX-57-XX*	6W	5700	₹ 2,590
LD06-111-XXX-57-XX*	9W	5700	₹ 2,750
LD06-151-XXX-57-XX*	12W	5700	₹ 3,150
LD06-171-XXX-57-XX**	15W	5700	₹ 3,350
LD06-221-XXX-57-XX**	18W	5700	₹ 3,790
LD06-301-XXX-57-XX***	24W	5700	₹ 6,150

- Also available with option of 4000K CCT, DALI dimmable and black colour housing option. White colour tunable option available on request
- Cutout dimensions: *Ø110mm | **Ø145mm | ***Ø168mm



Mollis Surface | LD06

Surface mounted downlight with high performance and efficiency.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD06-670-XXX-57SMG1	6W	5700	₹ 2,440
LD06-111-XXX-57SMG1	9W	5700	₹ 2,630
LD06-151-XXX-57SMG1	12W	5700	₹ 2,950
LD06-171-XXX-57SMG1	15W	5700	₹ 3,160
LD06-221-XXX-57SMG1	18W	5700	₹ 3,560
LD06-301-XXX-57SMG1	24W	5700	₹ 5,510

- Also available with option of 4000K CCT



Mollis X | LD06X

Mollis X with high performance and efficiency, deep inset diffuser for visual comfort with IP40 rating

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD06X-670-XX-57-XX*	6W	5700	₹ 2,310
LD06X-111-XX-57-XX*	9W	5700	₹ 2,360
LD06X-151-XX-57-XX*	12W	5700	₹ 2,710
LD06X-171-XX-57-XX**	15W	5700	₹ 2,870
LD06X-221-XX-57-XX**	18W	5700	₹ 3,240
LD06X-301-XX-57-XX***	24W	5700	₹ 5,110

- Also available with option of 4000K CCT, DALI dimmable and black colour housing option. White Colour tunable option available on request
- Cutout dimensions: *Ø115mm | **Ø150mm | ***Ø174mm



Comet | LD09R

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD09R-670-XX-57-XX*	6W	5700	₹ 1,850
LD09R-111-XX-57-XX*	9W	5700	₹ 1,940
LD09R-151-XX-57-XX*	12W	5700	₹ 2,230
LD09R-171-XX-57-XX**	15W	5700	₹ 2,520
LD09R-221-XX-57-XX**	18W	5700	₹ 2,910

- Also available with option of 4000K CCT, DALI dimmable option
- Cutout dimensions: *Ø110mm | **Ø145mm
- For converting Comet recess to surface option use additional accessories code : LDX09R-HSM6-9-12WH for 6W,9W, 12W. use additional accessories code : LDX09R-HSM15-18-WH for 15W,18W



Mollis RF | LD06

Mollis RF with high performance and efficiency, suitable for refurbishment projects. IP40

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD06-151-XXX-57-RF*	12W	5700	₹ 2,920
LD06-171-XXX-57-RF*	15W	5700	₹ 3,030
LD06-221-XXX-57-RF*	18W	5700	₹ 3,160

- Also available with option of 4000K CCT, DALI dimmable and black colour housing option. White colour tunable option available on request
- Cutout dimensions: *Ø168mm



Vertica | LD30

A premium lighting solution for open ceiling offices to create lighting effects that enrich such spaces. It adds glamour to collaborative spaces in new age offices.

Catalogue Reference No	Wattage (W)	CCT (K)	Length	Diameter	LP ₹
LD30-201-60W-40-PL	20W	4000	330mm	74mm	₹ 5,780
LD30-301-60W-40-PL	30W	4000	330mm	96mm	₹ 7,090
LD30-101-60W-40-PS	10W	4000	150mm	54mm	₹ 4,040
LD30-201-60W-40-PS	20W	4000	165mm	74mm	₹ 4,780
LD30-301-60W-40-PS	30W	4000	185mm	96mm	₹ 5,820
LD30-101-60W-40-SS	10W	4000	150mm	54mm	₹ 3,280
LD30-201-60W-40-SS	20W	4000	165mm	74mm	₹ 4,140
LD30-301-60W-40-SS	30W	4000	185mm	96mm	₹ 5,160

- All variants are available in 36 beam angle. To order, replace 60 with 36 in the above catalogue no.
- Also, all variants are available in black housing. To order, replace W with B in the above catalogue no.
- PL: Pendant Long | PS: Pendant Short | SS: Surface Mount



Halo+ | LD99

Suspended/surface mounted, unique, tapered profile product; high on aesthetics and performance. Housing with micro-texture powder coating.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD99-151-XXX57SMWH	12W	5700	₹ 4,350
LD99-211-XXX57SMWH	15W	5700	₹ 4,590
LD99-281-XXX57SMWH	18W	5700	₹ 4,950
LD99-151-XXX57PMWH	12W	5700	₹ 4,850
LD99-211-XXX57PMWH	15W	5700	₹ 5,050
LD99-281-XXX57PMWH	18W	5700	₹ 5,350

- Also available with option of 4000K CCT
- SM-Surface Mount | PM-Pendant Mount | WH-White Housing | BL-Black Housing



Gimball | LD56

Recess mounted LED COB downlighter with high efficacy. Housing made of extruded aluminium.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD56-141-060-57-XX*	10W	5700	₹ 3,590
LD56-251-060-57-XX**	20W	5700	₹ 3,990
LD56-281-060-57-XX**	24W	5700	₹ 4,190
LD56-351-060-57-XX***	28W	5700	₹ 4,490
LD56-381-060-57-XX***	32W	5700	₹ 4,720
LD56-501-060-57-XX****	40W	5700	₹ 5,650

- Cutout dimensions: *Ø102mm | **Ø110mm | ***Ø132mm | ****Ø154mm
- Available in 24 degree, 36 degree & 60 degree beam angle
- In 3000K/4000K, replace 57 with 30/40 in the above catalogue no.



Gimball | LD58

Recess mounted square LED COB downlighter with high efficacy. Housing made of extruded aluminium

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD58-251-24-57-WG1	20W	5700	₹ 4,640
LD58-251-36-57-WG1	20W	5700	₹ 4,640
LD58-251-60-57-WG1	20W	5700	₹ 4,640

- Cutout dimensions: 120mm x 120mm.
- Available in 24 degree, 36 degree & 60 degree beam angle
- In 3000K/4000K, replace 57 with 30/40 in the above catalogue no.
- Also available in black housing



Gimball Square Twin | LD58

Recess mounted square LED COB downlighter with high efficacy. Housing made of extruded aluminium

Catalogue Reference No.	Wattage	CCT	LP ₹
LD58-521-24-57-WG1	2X20W	5700K	₹ 7,050
LD58-521-36-57-WG1	2X20W	5700K	₹ 7,050
LD58-521-60-57-WG1	2X20W	5700K	₹ 7,050

- Cutout dimensions: 230mm x 120mm.
- Available in 24 degree, 36 degree & 60 degree beam angle
- In 3000K/4000K, replace 57 with 30/40 in the above catalogue no.
- Also available in black housing



Swivel Projector | LD59

Recess mounted adjustable LED COB downlighter with high efficacy. Housing made of extruded aluminium

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD59-251-24-57-WG1*	20W	5700	₹ 4,480
LD59-381-24-57-WG1**	32W	5700	₹ 4,750

- Cutout dimensions: *Ø128mm | **Ø135mm
- In 3000K replace 57 with 30; 4000K replace 57 with 40




Track Light | LD57

Track mounted LED COB luminaire with high efficacy. Housing made of extruded aluminium

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD57-251-60-57-WG1	20W	5700	₹ 5,800
LD57-381-60-57-WG1	32W	5700	₹ 5,900
LD57-501-60-57-WG1	40W	5700	₹ 7,010

- Also available in 24 degrees & 36 degrees beam angle
- In 3000K/4000K, replace 57 with 30/40 in the above catalogue no
- Also available in black housing

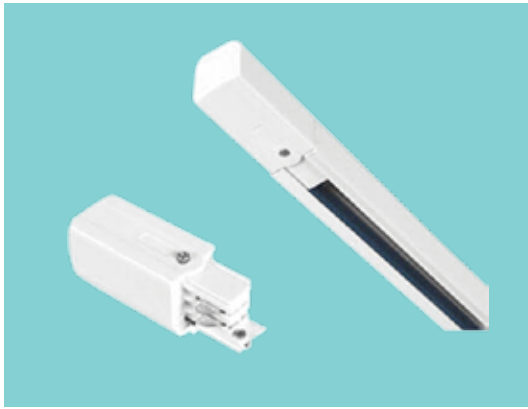

Track Light accessories

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
XTS5100WG1	Single phase 1 Mtr. track		₹ 1,490
XTS5200WG1	Single phase 2 Mtr. track		₹ 2,730
XTS51WG1	Straight connector		₹ 360
SKB510G1	1 Mtr. suspension for track G1		₹ 420
SKB520G1	2 Mtr. suspension for track G1		₹ 600

- WG1- Stands for white colour, BG1- Stands for Black colour
- 2 no's suspensions in single set

Internet of Lighting (IoL)[®] is our step in the direction of offering customers best-in-class solutions in lighting and beyond. It is Wipro Lighting's platform on which lighting and technology confluence.

TECHNOLOGIES



Power over Ethernet
(PoE)
based Solutions



Smart &
Connected
Outdoors



iSense™
Bluetooth
Low Energy (BLE)



Smart &
Connected
Spaces

inSync™
[MIND + BODY + LIGHT]

Human
Centric
Lighting



Wipro Lighting's alliances, with international technology companies, have made its offerings a major differentiator that has evoked a revolution in work lives.

We have collaborated with Cisco for Power over Ethernet (PoE) based lighting solutions and human-centric lighting solutions for new-age workspaces, enabling improvement in workspace productivity and enhanced employee wellbeing.

Our partnership with pure Li-Fi, Scotland, will deliver high-speed and secure data transmission through LED luminaires.

We have entered into partnership agreement with 3 prestigious technology brands - Igor, USA, for its smart and connected lighting products; with Schreder, Belgium, for premium and latest IoT based outdoor solutions; and with Mapiq, Netherlands, for smart workplace solutions.



Wipro's Solution on Human Centric Lighting



inSync™ makes artificial light mimic sunlight to create a pleasant and harmonious experience.

- Transform workspaces from constant to dynamic lighting
- Enhance employee wellbeing and productivity
- Work with multiple platforms - PoE, DALI or iSense™



The **WELL Building Standard™ (WELL)** provides guidelines that minimize disruption to the body's circadian system, enhances productivity, supports good sleep quality and provides appropriate visual acuity. In line with these, Wipro Lighting has enhanced focus on **inSync™** - our **human-centric lighting solution**, intended to promote a person's wellbeing, mood and health. It can improve concentration, safety and efficiency in workplaces or educational environments.

By changing the colour and/or intensity of light, we provide bio-dynamic light, based on human circadian rhythm, for increased employee concentration, cognitive performance, alertness and general wellbeing.




LMS

Lighting Management System


Smart occupancy, touchless workspace

A smart workspace is an intelligent ecosystem that relies on a number of connected devices to monitor, control and manage various working operations and conditions. Wipro Lighting believes, working environment and peoples' needs are integrated and converge at every level. Sensors add a dynamic aspect to lighting applications, making it more efficient, comfortable and convenient. Sensors are a key factor in the smart and connected workspace.

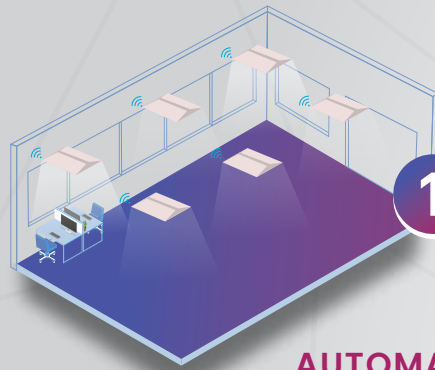

1 GO WIRELESS

**AUTOMATE
LIGHTING**

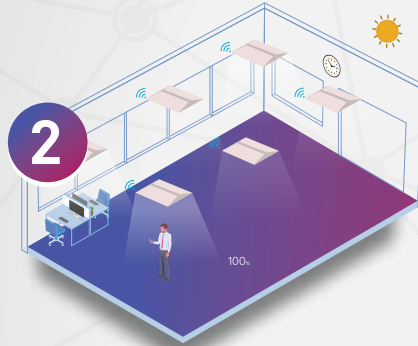

2




3 ANALYZE DATA



4 BE CARBON ZERO

**EXPAND BEYOND
CONTROL**

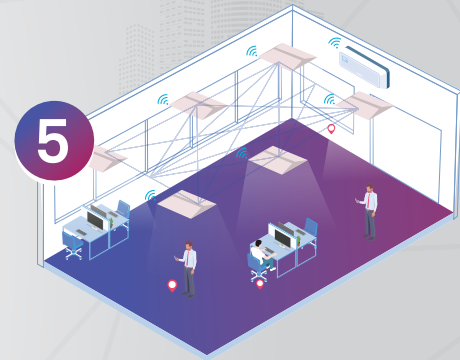

5

SIMPLIFY YOUR **SMART JOURNEY** WITH **SMARTER SOLUTIONS**

iSense

INTELLIGENT WIRELESS IoT SYSTEM

Choose smartness to simplify every stage of your journey. Our lighting control ecosystem is an end-to-end solution for every step of your smart lighting journey: starting with a simple switch and controller while gaining more benefits through automation. This ecosystem gradually contributes to green building and ESG initiatives through savings on resources, time, and money. Wipro iSense™ offers an easy-to-use mobile app to simplify and redefine smart lighting experience for enterprises. The app can easily configure and control individual/group devices, invoke scenes, and schedule device operations.



iSense Controller AFD1/4

Catalogue Reference No.	Description	LP ₹
WCAD1N	DALI Fixture Controller for 1 to 4 DALI Drivers	₹ 12,100



iSense Controller ARD32

Catalogue Reference No.	Description	LP ₹
WCA2CSD32N	DALI Fixture Controller for 32 DALI Drivers	₹ 36,230



iSense Controller AF10

Catalogue Reference No.	Description	LP ₹
WCA2CSFN	2 channel AC powered 0-10V	₹ 13,090



iSense Controller AR10

Catalogue Reference No.	Description	LP ₹
WCA2CSRNP	2 channel AC powered 0-10V Analog fixture controller with inbuilt 16A relay	Price on Request



iSense FM Sensor

Catalogue Reference No.	Description	LP ₹
WXD2CPLFN	DC Power FM Dual CH DIM PIR & Light Sensor	₹ 14,130



iSense AP Lowbay Sensor

Catalogue Reference No.	Description	LP ₹
WMAp-CMK-LBL	AC Powered PIR & Light Sensor Lowbay Lens	₹ 23,940



iSense AP Highbay Sensor

Catalogue Reference No.	Description	LP ₹
WMAP-SMK-HBL	AC Powered PIR & Light Sensor Highbay Lens	₹ 24,780



iSense Curtain Controller

Catalogue Reference No.	Description	LP ₹
WCACB	Smart Roller Blind Kit is an AC powered smart curtain motor that can control roller blind curtains	Price on Request



iSense AM Microwave Sensor

Catalogue Reference No.	Description	LP ₹
WMAM-CMK	High Bay Wireless microwave motion & daylight sensor : Recess type	Price on Request
WMAM-SMK	High Bay Wireless microwave motion & daylight sensor : Surface type	



iSense Gateway

Catalogue Reference No.	Description	LP ₹
WBTWNER	Gateway With Ethernet & RTC	₹ 32,290



iSense Wall Switch

Catalogue Reference No.	Description	LP ₹
WSC5B	Wireless 5 Button Remote	₹ 6,200
ISEN-WCS-8BTN	Wired 8 Button Remote	₹ 37,500



eSense Group Light Sensor

Product Name	Catalogue Reference No.	Description	LP ₹
Flush Mount PIR Motion Sensor	GLPS01R010HA	Recessed	₹ 5,300
Surface PIR Motion Sensor	GLPS01S010HA	Surface	₹ 6,200
IR Remote	HRC-11	-	₹ 5,500

INTRODUCING THE BRILLIANCE OF INDUSTRY 5.0



industry
5.0

The next revolution in the lighting industry integrates humans with efficient, intelligent, and accurate machines. While Industry 4.0 revolutionized automation, Industry 5.0 recentres itself around the “human” factor and focuses on human-machine collaboration for creating a sustainable future. Wipro C&I Business has taken the lead to revolutionize the industry by integrating the human touch in Industry 5.0. It proudly presents the Latest range of Lighting, Indoor Air Quality, and Anthropometric Seating Solutions keeping human wellness in focus.

THE HUMAN-MACHINE EQUILIBRIUM



NET-ZERO TARGETS

Creating a sustainable future for humanity

WIPRO C&I BUSINESS:
GOOD FOR PEOPLE, GREAT FOR BUSINESS

SMART OUTDOOR

Wirelessly Connected

Centrally Managed

Traffic Monitoring




Improved Public Safety

Optimized Energy Consumption

Emergency Call

EV Charger

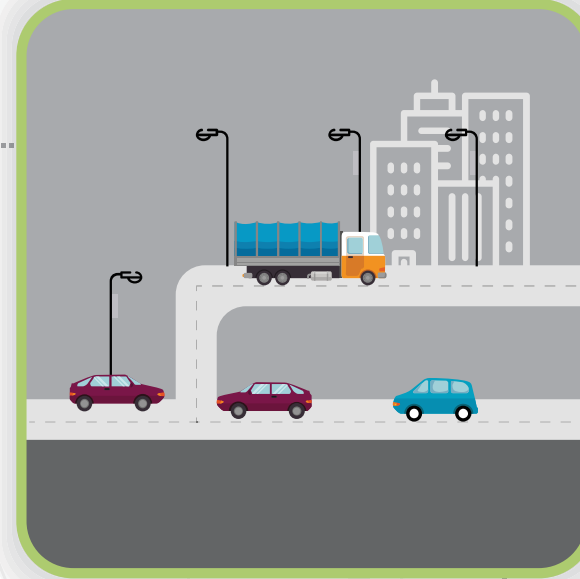


10:00 : 00 AM

Scheduled On/Off

Dusk to Dawn Sensors

Motion Sensor Activation

Speaker

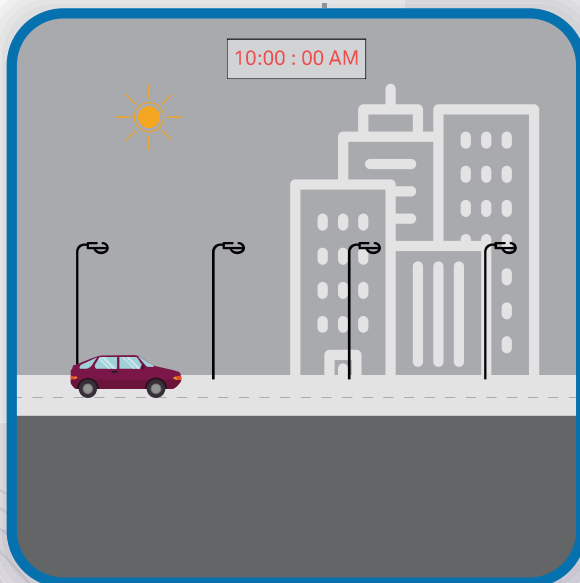


Predictive Fault Detection

Error Reporting

Report Generation

Energy Metering

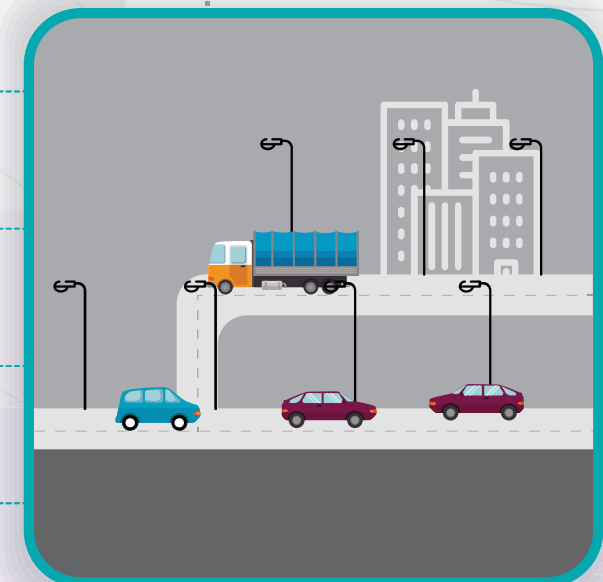



LEANROOM & STERILE AREAS

Lighting solutions to facilitate perfect vision for ZERO error zones.

Lighting in the zero-containment zone plays a critical role in complying with the stringent norms of cleanrooms. With over 25+ years of experience and being the pioneers of lighting for cleanroom facilities in India, the Vision LED range of cleanroom luminaires have been thoroughly developed to cater to the diverse requirements and applications. With options like top maintainable/bottom maintainable, recess/surface mounting, and various cut-out dimensions and frame materials, it has been widely adopted in pharmaceutical, food & beverages, electronics, and semiconductor industries across the country.

Lighting for Photosensitive Drugs



Normal Cleanroom Environment




Monochromatic Cleanroom Environment

585nm

Light-sensitive drugs require protective measures during formulation development, including the use of excipients and photostability testing. In manufacturing, long-wavelength brown light (500-800 nm) should be used to protect these products.

Wipro Vision LED Luminaire uses selected special LEDs of Monochromatic Light Output. Wipro has selected 585nm LEDs which give output in the range of 580 to 590nm only. This helps customers get exact monochromatic light without any other wavelength thus maintains the effectiveness of the medicine under preparation not reacting with the light-sensitive APIs leading to impurities.

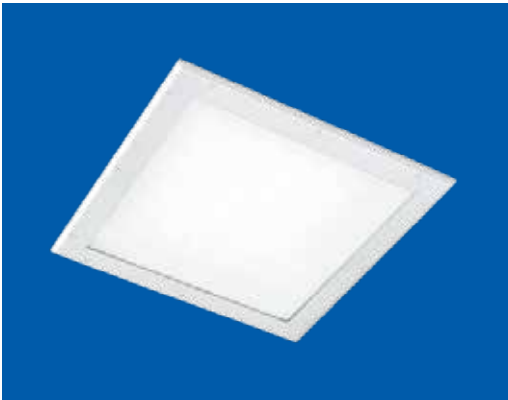


Vision LED BOCR | LC20

Recess mounted, bottom opening cleanroom luminaire.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LC20-191-XXX-57-G2*	20W	5700K	₹ 6,090
LC20-431-XXX-57-G2*	30W	5700K	₹ 7,050
LC20-411-XXX-57-G2**	30W	5700K	₹ 8,550
LC20-551-XXX-57-G2***	42W	5700K	₹ 9,550
LC20-721-XXX-57-G2***	60W	5700K	₹ 11,350
LC20-102-XXX-57-G2***	80W	5700K	₹ 11,550
LCX202SCRMB			₹ 250
LCX204SCRMB			₹ 550

- Also available with dimming, surface mounting, screwless bottom frame, stainless steel bottom frame, dual CCT & Monochromatic
- Cutout Dimensions: *285mm x 285mm | **495mm x 495mm | ***585mm x 585mm
- IP65 from bottom post installation

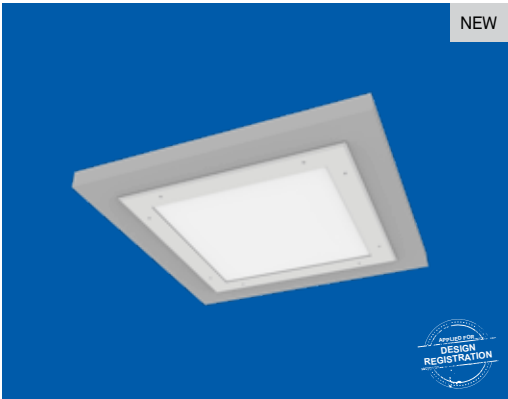

Vision Prime LED BOCR | LC24

Recess mounted, bottom opening, cleanroom luminaire which is suitable for partial cut in ceiling enhancing the safety features. Self alignment mounting mechanism, equipped with pressure plates ensures easy installation.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LC24-411-XXX-57-XX*	30W	5700K	₹ 8,290
LC24-551-XXX-57-XX*	42W	5700K	₹ 8,350

- Also available in SS options
- * Ceiling cut-out of 585 x 585 mm
- IP65 from bottom post installation



Vision+ LED TOCR | LC37

Recess mounted, top opening cleanroom luminaire. Self alignment mounting mechanism, equipped with pressure plates, auto-cut off and upgradable LED Engine.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LC37-191-080-57-XX*	20W	5700K	₹ 16,150
LC37-431-080-57-XX*	30W	5700K	₹ 17,250
LC37-411-080-57-XX**	30W	5700K	₹ 19,250
LC37-551-080-57-XX*	42W	5700K	₹ 20,250
LC37-721-080-57-XX**	60W	5700K	₹ 21,050
LC37-102-080-57-XX**	80W	5700K	₹ 21,950

- Cutout Dimensions: *300mm x 300mm | **600mm x 600mm
- Above codes are suitable for 50mm ceiling thickness. For 080mm ceiling thickness, replace 050 with 080 in the above codes
- Also available with high efficacy, dimming, stainless steel bottom frame, dual CCT & Monochromatic
- IP65 from bottom post installation



M ANUFACTURING PLANTS & INDUSTRIES

Lighting plays critical factor in manufacturing and heavy industries where continuous high productivity and safety is of utmost importance. Wipro's best-in-class industrial lighting solutions are specifically designed to deliver high light output with low energy consumption and a maintenance-free, long service life.

Wipro's light with its unique features of low glare, multiple beam angle options, CCTs ensure that the workers feel safe and comfortable to work under the light ensuring reduced fatigue, improved concentration, and reduced absenteeism. This results in enhanced employee productivity, building positivity and promoting workplace safety with reduced Total Cost of Ownership (TCO).

3Ergonomic Efficient Economic

The 3Es of Wipro Industrial Luminaires ensures a lighting which is
Good for People & Great for Business



Radial UNO | LH21 (HE)

The luminaire is IP66 & IK10 high-efficacy highbay designed to deliver optimum performance and sustained energy savings over the product life cycle under harsh industrial environments with output up to 155 lm/W.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH21-152-060-57-HE	80W	5700K	₹ 11,950
LH21-182-090-57-HE	100W	5700K	₹ 13,190
LH21-222-090-57-HE	120W	5700K	₹ 18,150
LH21-262-060-57-HE	140W	5700K	₹ 18,890
LH21-282-060-57-HE	150W	5700K	₹ 19,650
LH21-302-090-57-HE	160W	5700K	₹ 19,750
LH21-332-090-57-HE	180W	5700K	₹ 20,550
LH21-372-060-57-HE	200W	5700K	₹ 20,790

- Available in 60 & 90 degree beam angle
- Also available with LH21R - with reflexor



Radial UNO | LH21 (X2)

The luminaire is IP66 & IK10 new-gen highbay designed to deliver optimum performance and sustained energy savings over the product life cycle under harsh industrial environments with output up to 140 lm/W.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH21-102-060-57-X2	80W	5700K	₹ 8,350
LH21-122-060-57-X2	100W	5700K	₹ 9,250
LH21-152-060-57-X2	120W	5700K	₹ 9,450
LH21-172-060-57-X2	140W	5700K	₹ 11,250
LH21-182-060-57-X2	150W	5700K	₹ 12,090
LH21-212-060-57-X2	160W	5700K	₹ 12,250
LH21-222-060-57-X2	180W	5700K	₹ 14,090
LH21-252-060-57-X2	200W	5700K	₹ 14,550

- Also available in 90 degree
- Also available with LH21G - with toughened glass, LH21R - with reflexor on request



Radial Uno Z High Ambient Temperature | LH21 HAT

Introduction of new-gen highbays specifically designed with specially designed LED chips for superior and reliable performance in extreme high ambient temperatures up to 65 degree Celcius.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH21-102-HAT-57-XX	80W	5700K	₹ 12,020
LH21-122-HAT-57-XX	100W	5700K	₹ 15,190
LH21-152-HAT-57-XX	120W	5700K	₹ 16,650
LH21-182-HAT-57-XX	150W	5700K	₹ 17,490

- Wire from driver to luminaires are not in Wipro's scope

NEW

Constant
Light
Output

Radial Uno Z Constant Light Output | LH21 CLO

The ultimate new-age highbays which ensure lower lumen depreciation over a period of time in industrial harsh environments leading to lowest total cost of ownership.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH21-122-060-57CLO	80W	5700K	Price on Request
LH21-162-060-57CLO	100W	5700K	
LH21-192-060-57CLO	120W	5700K	
LH21-222-060-57CLO	140W	5700K	
LH21-242-060-57CLO	150W	5700K	
LH21-262-060-57CLO	160W	5700K	
LH21-292-060-57CLO	180W	5700K	
LH21-322-060-57CLO	200W	5700K	

• Also available in 90 degree

Xpressbay Pro | LH26C

XpressBay Pro is an India Design Mark Award Winner Linear Highbay in the areas of optical performance, sustainability, application diversity and durability being IP66 & IK08 protected with system lumen output up to 145 lm/W.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH26C-102-120-40XX	80W	5700K	₹ 10,550
LH26C-142-120-57XX	100W	5700K	₹ 11,250
LH26C-172-60-57-XX	120W	5700K	₹ 14,350
LH26C-242-60-57-XX	150W	5700K	₹ 14,750
LH26C-262-30-57-XX	180W	5700K	₹ 21,990
LH26C-282-60-57-XX	200W	5700K	₹ 23,050

• Also available in 30, 60, 90 degree beam angles

Astra | LH24

This luminaire is an IP54 protected diffused linear highbay which is thoughtfully designed to fight glare in industry and make the eyes smile.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH24-132-XXX-57-G1	80W	5700K	₹ 11,950
LH24-152-XXX-57-G1	100W	5700K	₹ 12,350
LH24-162-XXX-57-G1	120W	5700K	₹ 12,550
LH24-242-XXX-57-G1	150W	5700K	₹ 15,690

Maxx Wellglass | LE09

A revolutionary design redefining the wellglass category with category defining Fresnel Lens with IP66 and IK08 protection up to 115 lm/W system efficacy.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE09-501-XXX-57-XX	35W	5700K	₹ 4,850
LE09-571-XXX-57-XX	40W	5700K	₹ 5,150
LE09-671-XXX-57-XX	55W	5700K	₹ 8,550

• For cradle mounted, change XX into CD

NEW




StormX Wellglass | LE04

A IP66 & IK07 protected wellglass with X-factor which is thoughtfully designed for illumination in heavy industries, cement, metal & steel, etc.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE04-501-XXX-57-XX	35W	5700K	₹ 3,350
LE04-501-XXX-57-CD	35W	5700K	₹ 3,450
LE04-571-XXX-57-XX	40W	5700K	₹ 4,150
LE04-571-XXX-57-CD	40W	5700K	₹ 4,250

NEW

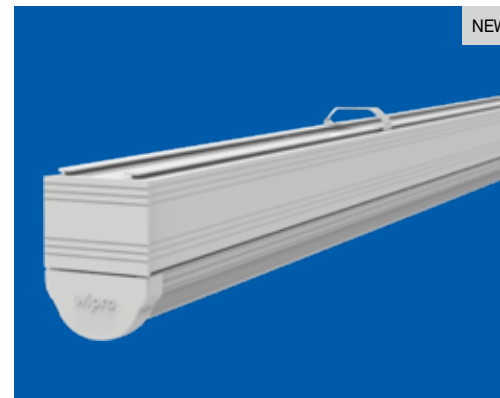

Optima Trunking | LE16

High performance IP40 industrial trunking linears

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE16-491-XXX-57-XX	40W	5700K	₹ 3,190
LE16A02C-2000			₹ 2,390

• Suspension kit to procure separately



Optima | LL24


The luminaire is an IP40 protected technical linear industrial batten with high efficacy, for modern high-tech industrial environment

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LL24-541-XXX-57-XX	40W	5700K	₹ 2,650
LL24-541-XXX-57-CD	40W	5700K	₹ 2,850
LL24R-541-XX-57-XX	40W	5700K	₹ 4,150
LL24R-541-XX-57-CD	40W	5700K	₹ 4,250
LL24-251-XXX-57-XX	20W	5700K	₹ 2,650
LL24-251-XXX-57-CD	20W	5700K	₹ 2,750
LL24R-251-XX-57-XX	20W	5700K	₹ 3,950
LL24R-251-XX-57-CD	20W	5700K	₹ 4,050
LL24-251-XXX-572F	20W	5700K	₹ 2,050
LL24-251-XXX-57-CD2F	20W	5700K	₹ 2,150
LL24R-251-XX-57-2F	20W	5700K	₹ 2,750
LL24R-251-XX-57-CD2F	20W	5700K	₹ 2,850

Optima High Efficiency | LL24HE

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LL24-251-XXX-57-HE	16W	5700K	₹ 2,890
LL24-311-XXX-57-HE	20W	5700K	₹ 2,950
LL24-501-XXX-57-HE	32W	5700K	₹ 2,990
LL24-621-XXX-57-HE	40W	5700K	₹ 3,150
LL24-741-XXX-57-HE	45W	5700K	₹ 3,850

• Order in HE code for High Efficacy, CD code for conduit mounting, LL24R for with reflector & 2F for 2 feet.

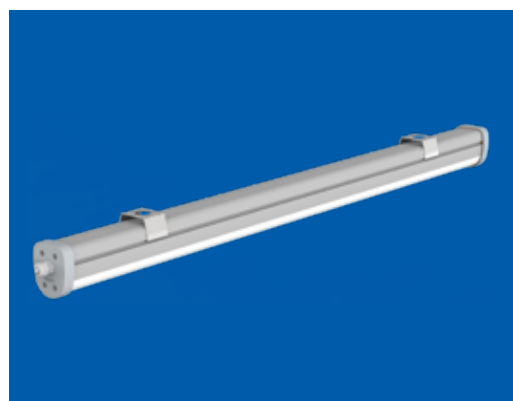


Imperia | LE23

Surface/Pendant mounted IP65 high efficacy technical linear luminaire

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE23-251-XXX-57-2F	20W	5700K	₹ 4,150
LE23-251-XXX-57-XX	20W	5700K	₹ 4,450
LE23-491-XXX-57-XX	40W	5700K	₹ 5,350
LE23-501-XXX-57-HE	32W	5700K	₹ 5,750

• 2F is for 2 feet, HE for High Efficacy

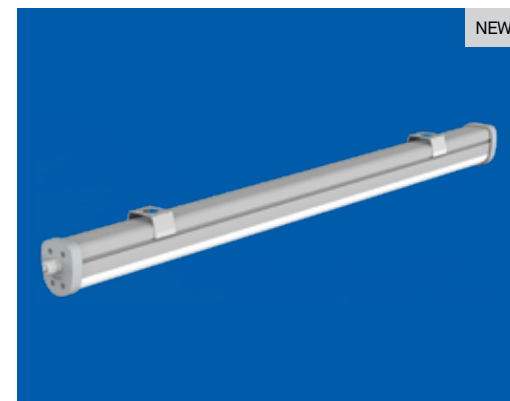


Imperia Emergency | LE23 EM

Surface/Pendant mounted IP65 high efficacy technical emergency linear luminaire up to 3 hours of battery backup with maximum 10% output range

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE23-251-XXX-57-EM	20W	5700K	₹13,050
LE23-491-XXX-57-EM	40W	5700K	₹15,050

• Also available on 4000K CCT

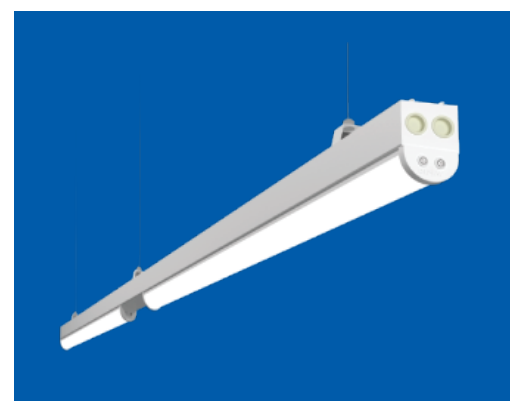

Xline Pro | LE14

Trunk mounted LED channel, specially designed extruded aluminium trunk with snap fit arrangement, for easy and flexible installation

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE14-491-XXX-57-XX	39W	5700	₹ 9,450
LE14A02C			₹ 3,090



Bulkhead | LW07

IP65 luminaire for surface/wall mounted applications

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LW07-141-XXX-57-G1	10W	5700K	₹ 1,650



Illuminating safety

Introducing the legacy of Wipro in flameproof lighting too!

Lighter in weight and safer than ever before, Blazeline is the new standard for lighting in hazardous zones. The Blazeline range brings with it a solution-centric approach, uncompromised quality, highest lumen efficacy, optimal design and light output, best-in-class photometry and unmatched performance. Get ready to go beyond just safety with Wipro's Blazeline range of solutions.



CIMFR
Certified



PESO
Certified

NEW



Blazeline | Flameproof Highbay

Flameproof Highbay with superior lumen output ensuring lowest total cost of ownership with secondary optics and industry leading 120 lm/w system efficacy. Exd, IIC, T6, Zone 1,2, 21 & 22

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPFLH1-122-XXX65XX	70W	6500K	₹ 12,890
FPH2-142-090-65XX	100W	6500K	₹ 22,150
FPH2-202-090-65XX	120W	6500K	₹ 23,090
FPH2-252-060-65XX	150W	6500K	₹ 23,350

NEW



Blazeline | Flameproof Wellglass

Flameproof wellglass ensuring lowest total cost of ownership even in extreme environment with secondary optics and industry leading 120 lm/w system efficacy. Exd, Gb, IIC, T6, Zone 1 & 21

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPW3-421-XXX-65XX	30W	6500K	₹ 9,850
FPW3-641-XXX-65XX	45W	6500K	₹ 9,950
FPW3-851-XXX-65XX	60W	6500K	₹ 12,650
FPW3-102-XXX-65XX	70W	6500K	₹ 12,890

NEW



Blazeline | Flameproof Floodlight

Flameproof Floodlight with superior thermal management, durability and unmatched lumen output with secondary optics and industry leading 120 lm/w system efficacy.

Exd, IIC, T5, Zone 1,2, 21 & 22

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPF1-122-XXX-65XX	70W	6500K	₹ 21,990
FPF2-142-090-65XX	100W	6500K	₹ 26,590
FPF2-202-090-65XX	120W	6500K	₹ 27,590
FPF2-252-060-65XX	150W	6500K	₹ 31,990

NEW



Blazeline | Flameproof Handlamp

Easy to use, reliable and safe handlamp.

Exd, IIC, T6, Zone 1 & 2

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPL1-191-XXX65XX	15W	6500K	₹ 8,450
FPL2-191-XXX65XX	15W	6500K	₹ 8,190

• Rated Voltage of FPL1 is 240V AC and FPL2 is 24V AC

NEW



Blazeline | Flameproof Wellglass

Flameproof wellglass for safe and reliable performances in extreme environment with secondary optics and 100 lm/w system efficacy.

Exd, Gb, IIC, T6, Zone 1, 2, 21 & 22

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPW2-421-XXX-65XX	30W	6500K	₹ 11,990
FPW2-641-XXX-65XX	45W	6500K	₹ 12,250
FPW2-851-XXX-65XX	60W	6500K	₹ 16,090

NEW



Blazeline | Flameproof Vessel Lamp

Used for visual inspection and illumination in reactor/vessel area.

Exd, IIC, T6, Zone 1 & 21

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPV1-171-060-65XX	15W	6500K	₹ 8,990

NEW

Blazeline | Flameproof Cleanroom

Proven expertise in flameproof precision cleanroom lighting with secondary optics and 100 lm/w system efficacy.

Exd, IIC, T5, Zone 1, 2, 21 & 22

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
FPC1-311-XXX-65XX	45W	6500K	₹ 18,550
FPC2-851-XXX-65XX	60W	6500K	₹ 28,690
FPC3-851-XXX-65XX	60W	6500K	₹ 30,290

• FPC1 & FPC2 is Bottom Openable (BOCR) and FPC3 is Top Openable (TOCR)

NEW

Blazeline Accessories

Catalogue Reference No.	Description	LP ₹
FPA-JB1-4WAY	Flameproof Junction Box 4-Way D145xH91mm (Up to 50A /240V to 415V AC, 50Hz)	₹ 1,950
FPA-PLUG-M20	Blazeline FP PLUG M20	₹ 105
FPA-PB1-10A-1NO1NC	Flameproof Push Button, Upto 10A, Range:240 to 415 VAC, 50 Hz, Contact - 1 NO,1 NC	₹ 4,990
FPA-RS1-16A-2P240V	Flameproof Rotary Switch up to 16A/240V AC, 50Hz, 2 Pole	₹ 4,250
FPA-RS1-20A-2P240V	Flame proof Rotary Switch up to 20A/240V AC, 50Hz, 2 Pole	₹ 4,550
FPA-RS1-32A-4P415V	Flameproof Rotary Switch up to 32A/415V AC, 50Hz, 4 Pole	₹ 4,850
FPA-CG-19MM	Flameproof Cable Gland 19MM	₹ 650
FPA-RH	Flameproof Rubber Hud	₹ 50
FPA-16AMP-3PIN	Flameproof Socket & Switch 16AMP 3PIN	₹ 7,350
FPA-32AMP-5PIN	Flameproof Socket & Switch 32AMP 5PIN	₹ 9,450

BLAZELINE™

Illuminating safety

The new standard of lighting
in flameproof zones

End-to-end
solutions

- From lighting audit to lighting design
- Compliant with CIMFR and PESO standards

- Maximum safety and reliability
- Glare-free and uniform illumination for visual comfort
- Quick and easy to install

Optimal
Design

Lowest
total cost of
ownership

- Low maintenance
- Reduces operational costs
- Energy efficient



FROSTLINE

Frostline is newly launched Industrial sub-zero portfolio for catering technical illumination in cold storages, cold chains, medical cold room facilities, etc.

NEW




Radial Uno Frostline | LH21FL

Highbays specifically designed for low temperature applications from – 20°C to +45°C

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LH21FL-122-60-57XX	80W	5700K	Price on Request
LH21FL-102-60-57X1	80W	5700K	
LH21FL-162-60-57XX	100W	5700K	
LH21FL-122-60-57X1	100W	5700K	
LH21FL-192-60-57XX	120W	5700K	
LH21FL-152-60-57X1	120W	5700K	
LH21FL-242-60-57XX	150W	5700K	
LH21FL-182-60-57X1	150W	5700K	
LH21FL-292-60-57XX	180W	5700K	
LH21FL-222-60-57X1	180W	5700K	
LH21FL-322-60-57XX	200W	5700K	
LH21FL-252-60-57X1	200W	5700K	

• IP66. Easy installation and long service life

NEW

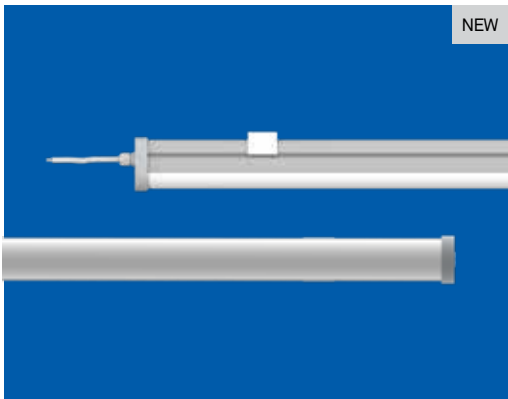

Imperia Frostline | LE23FL

Industrial Linear Battens specifically designed for low temperature applications from – 20°C to +45°C

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE23FL-491-XX-57XX	40W	5700K	Price on Request
LE23FL-251XX-57-2F	20W	5700K	

• IP66. Easy installation and long service life

NEW



Wellglass Frostline | LE07FL

Wellglass specifically designed for low temperature applications from – 20°C to +45°C

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LE07FL-501-XX-57-XX	35W	5700K	Price on Request
LE07FL-571-XX-57-XX	40W	5700K	
LE07FL-112-XX-57-XX	70W	5700K	

• IP66. Easy installation and long service life

NEW



LED Bulkhead Frostline | LW07FL

Bulkhead specifically designed for low temperature applications from – 20°C to +45°C

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LW07FL-141-XX-57G1	10W	5700K	Price on Request

• IP66. Easy installation and long service life





Samruddhi Mahamarg, Nagpur- Mumbai Expressway



OUTDOOR LIGHTING

Streetlights, Floodlights and Landscape lighting range

Modern lifestyle has impacted our schedules stretching their way into midnight. This has increased the need for illuminating outdoor spaces uniformly and efficiently.

Wipro Lighting provides a vast range of outdoor lighting luminaires with special features, particularly designed to meet wide ranging lighting needs.

The precision optical design and uniform light distribution enhance safety on roads.

Our luminaires have advanced LED technology for higher energy savings, with contemporary styling that blends with urban architecture.



STREETLIGHT

The aesthetics and compact design of the LED streetlight suits the urban architecture and have a long life and sturdy performance. The LED Streetlight are high on energy savings and offer the right illumination to ensure smooth flow of the traffic. Lighting plays a pivotal role in ensuring a smooth traffic flow and the safety of the residents. LED streetlight is an energy-efficient, long-lasting and a cost-effective choice for the futuristic cities. Wipro LED streetlight systems are versatile enough to be managed, maintained, and monitored with ease. In addition, the CO2 emission is lower as compared to conventional lighting sources, hence promoting a greener and better tomorrow.



Skyline | LR02

High performance IP66 LED streetlight, housing made of die-cast aluminium, with street optic lens and polycarbonate diffuser for uniform light distribution

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR02-261-XXX-57-G1	20W	5700	₹2,390
LR02-291-XXX-57-G1	25W	5700	₹2,850
LR02-331-XXX-57-XX	30W	5700	₹3,250
LR02-451-XXX-57-G1	40W	5700	₹4,550
LR02-501-XXX-57-G1	45W	5700	₹5,250



Skyline | LR02

High performance IP66 LED streetlight with contemporary design, housing made of die-cast aluminium with street optic lens and glass diffuser for uniform light distribution

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR02-501-XXX-57-G3	45W	5700	₹5,950
LR02-671-XXX-57-G3	60W	5700	₹6,590
LR02-781-XXX-57-G3	70W	5700	₹7,150
LR02-981-XXX-57-G2	80W	5700	₹7,990
LR02-102-XXX-57-G2	90W	5700	₹8,750
LR02-112-XXX-57-G2	100W	5700	₹9,550
LR02-122-XXX-57-G2	110W	5700	₹10,950
LR02-132-XXX-57-G3	120W	5700	₹11,550
LR02-182-XXX-57-G3	150W	5700	₹14,950
LR02-212-XXX-57-G2	180W	5700	₹19,190




NEW

Skyline Nxt | LR09

Streetlight with IP66 rating and aesthetic aluminum powder coated housing having precise street optic lens, glass diffuser, high-efficacy, and long-life LEDs

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR09-781-XXX-57-XX	70W	5700	₹6,790
LR09-981-XXX-57-XX	80W	5700	₹7,050
LR09-102-XXX-57-XX	90W	5700	₹8,290
LR09-112-XXX-57-XX	100W	5700	₹9,490
LR09-122-XXX-57-XX	110W	5700	₹10,200
LR09-132-XXX-57-XX	120W	5700	₹11,250

NEW

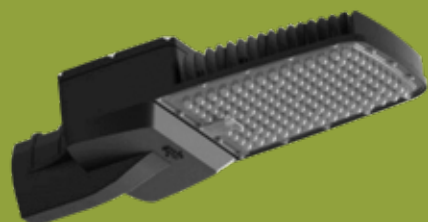

Voyage | LR02

High-performance LED streetlight with an integrated IP66 lens, made of aluminum die-cast housing having high efficacy, better thermal management, IK10 impact resistance with high energy saving

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR02-182VT157NHSP5	150W	5700	₹16,090
LR02-212VT157NHSP5	180W	5700	₹20,990
LR02-282VT157NHSP5	200W	5700	₹20,990
LR02-352VT157NHSP5	220W	5700	₹32,990
LR02-402VT157NHSP5	250W	5700	₹32,990

NEW



DOT | LR08

Streetlight with aesthetic aluminium powder coated housing and precise street optic lens, with integrated IP66 protection and IK10 impact resistance

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR08-501-XXX-57-XX	35W	5700	₹3,990
LR08-611-XXX-57-XX	45W	5700	₹5,250
LR08-651-XXX-57-XX	50W	5700	₹5,590
LR08-781-XXX-57-XX	60W	5700	₹6,290
LR08-112-XXX-57-XX	100W	5700	₹10,290
LR08-122-XXX-57-XX	110W	5700	₹10,690
LR08-132-XXX-57-XX	120W	5700	₹11,950

NEW



Aster | LR02

High performance LED streetlight made of aluminum pressure die-cast housing having high purity integrated IP66 lens & high efficacy with specially designed wide distribution street optics

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR02-182VT157NHSP4	150W	5700	₹19,990
LR02-212VT157NHSP4	180W	5700	₹29,990
LR02-282VT157NHSP4	200W	5700	₹29,990
LR02-352VT157NHSP4	220W	5700	₹39,990
LR02-402VT157NHSP4	250W	5700	₹39,990



Skyline Plus | LR06

Integrated IP66 lens street light, compact and aesthetic aluminium powder coated housing with precise street optic


Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR06-981-XXX-57-XX	80W	5700	₹7,690
LR06-102-XXX-57-XX	90W	5700	₹8,590



Skyline LED Plus | LR13

Streetlight with IP66 rating and aesthetic aluminum powder coated housing having precise street optic lens, high efficacy, and long-life LEDs

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR13-781-XXX-57-XX	70W	5700	₹6,790

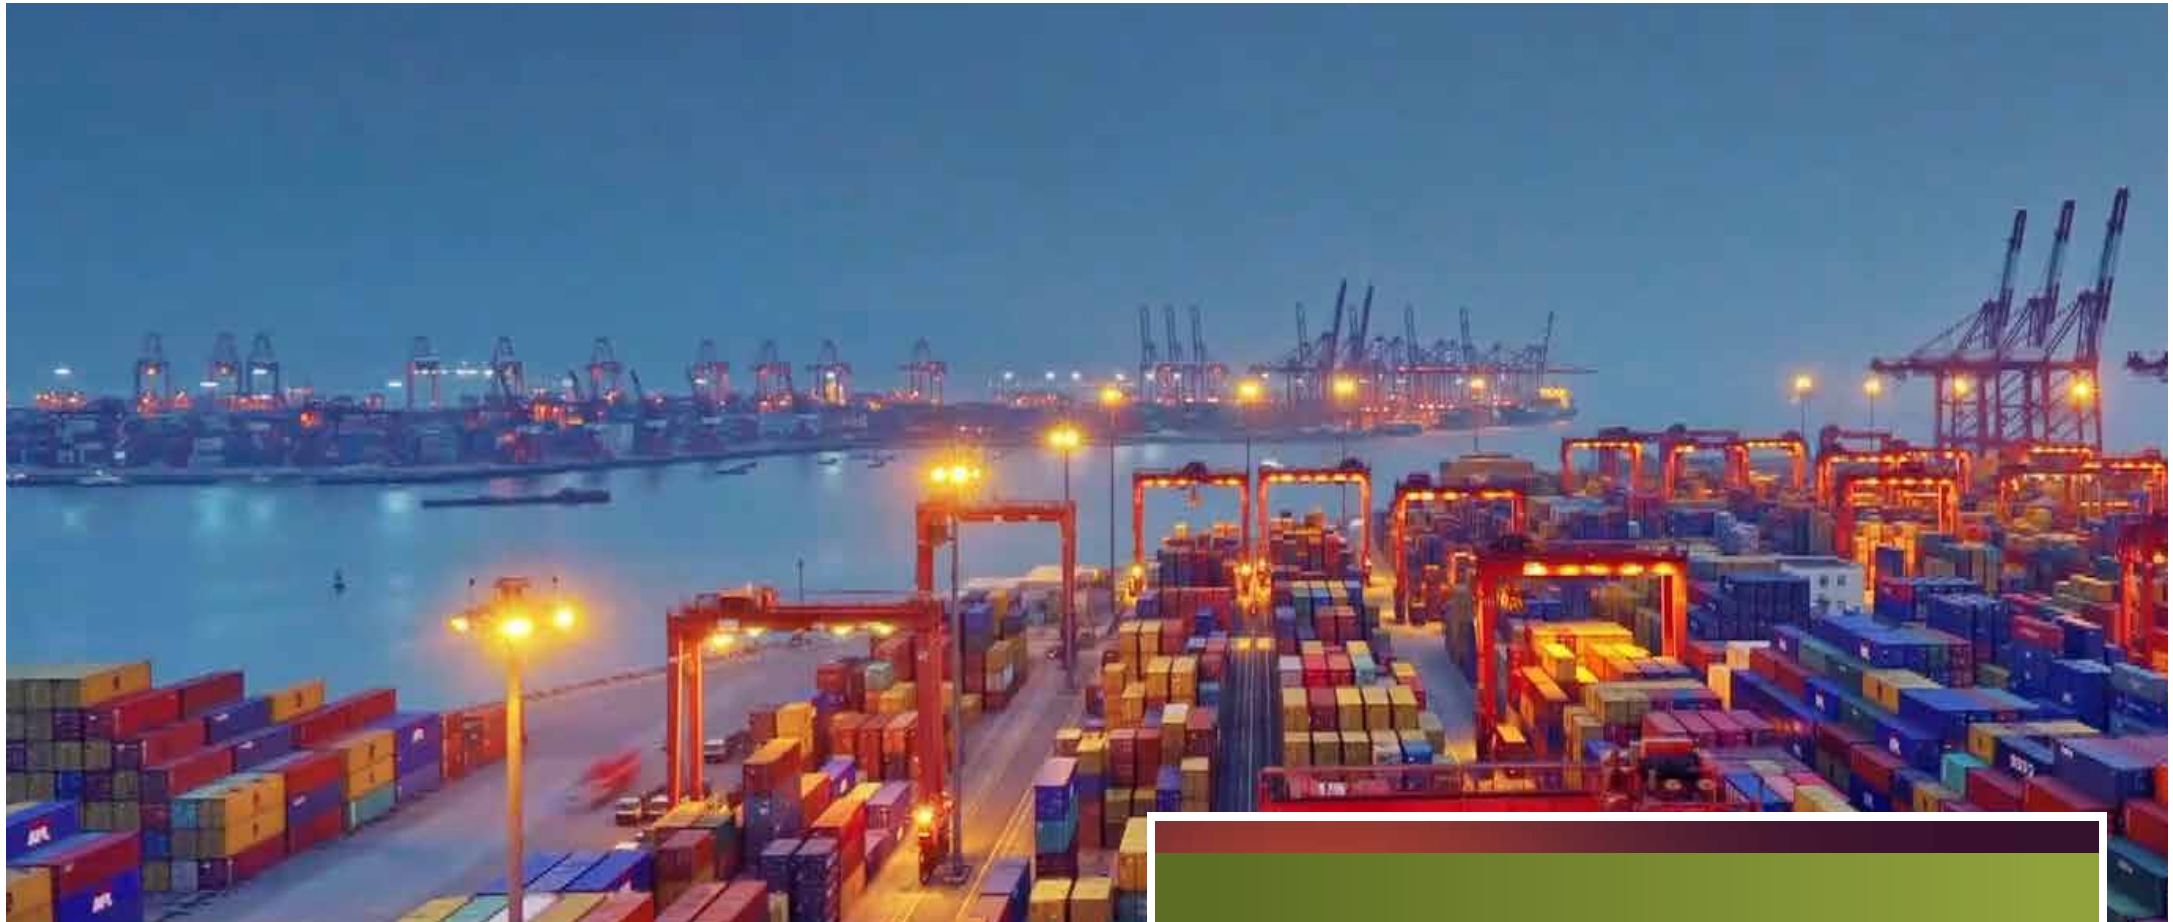


FLOODLIGHT

An intricate element for area lighting solution

Floodlights find their purpose in a variety of settings, from urban streets and parking lots to outdoor areas and industrial facilities.

Wipro's floodlight solutions offer a comprehensive range of benefits, ensuring versatility, enhanced safety and reliable night time operations.

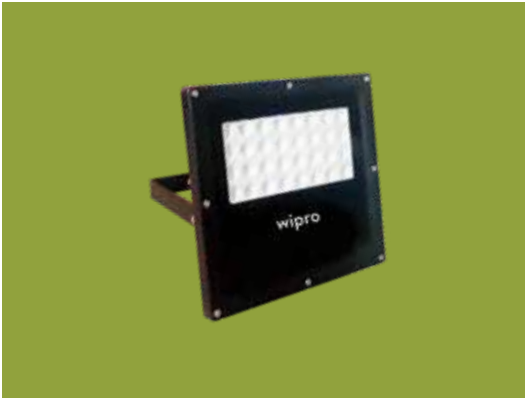

Alpha Floodlight | LF20

IP66 luminaire with aluminum die-cast housing, toughened glass, and unique lens system, for enhanced illumination with inbuilt complete assembly LED driver having high efficacy

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF20-102-060-57-G3	80W	5700	₹9,450
LF20-122-060-57-G2	100W	5700	₹10,990
LF20-132-060-57-G3	120W	5700	₹12,490
LF20-192-060-57-G2	150W	5700	₹14,990
LF20-392-060-57-G3	300W	5700	₹23,550
LF20-442-060-57-G2	350W	5700	₹26,550
LF20-502-060-57-G4	400W	5700	₹34,990
LF20-622-060-57-G3	450W	5700	₹50,990



NEW

Ranger | LF30

Aluminium die-cast housing luminaire with technologically advanced Fresnel diffuser system for uniform illumination and wider light distribution comes with IP66 protection

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF30-571-XXX-57-XX	40W	5700	₹4,750
LF30-651-XXX-57-XX	50W	5700	₹4,590
LF30-781-XXX-57-XX	60W	5700	₹6,150



NEW

Ranger Plus | LF30

Aluminium die-cast housing luminaire with technologically precise lens system for uniform illumination and wider light distribution with IP66 protection

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF30-112-60L-57-XX	100W	5700	₹11,390
LF30-132-60L-57-XX	120W	5700	₹12,250



Ranger LED Floodlight | LF30

Aluminum die-cast housing with toughened glass diffuser, precise lens for uniform distribution with IP66 protection

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF30-272-060-57-XX	200W	5700	₹20,990
LF30-342-060-57-G1	250W	5700	₹20,990



NEW

Vega | LF40

High purity integrated IP66 lens diffuser luminaire with aluminum die cast housing having high efficacy & better thermal management with high energy saving

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF40-102-060-57-XX	80W	5700	₹7,550
LF40-122-060-57-XX	100W	5700	₹9,450
LF40-132-060-57-XX	120W	5700	₹10,990
LF40-192-060-57-XX	150W	5700	₹11,590
LF40-272-060-57-XX	200W	5700	₹14,990
LF40-102-060-57-HE	80W	5700	₹9,450
LF40-122-060-57-HE	100W	5700	₹10,550
LF40-132-060-57-HE	120W	5700	₹12,250
LF40-192-060-57-HE	150W	5700	₹13,590
LF40-272-060-57-HE	200W	5700	₹17,990




High-Performance Sports Lighting

Discover Wipro's high-performance sports lighting solutions, designed for reliability and modern requirements. The enhanced optics and robust design are ideal for indoor and outdoor sports venues. Enjoy uniform illumination, exceptional colour rendering, and minimized lighting spills, all tailored to meet your unique needs.

Olympus

Range of Sports Lighting

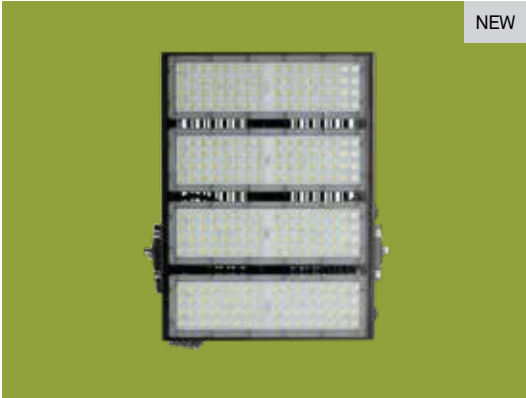

Olympus | LF45

Highly advanced LED, technically advanced optic lens with high precision light output and IP66 protection made of aluminum die-cast housing having integral driver

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF45-442-022-57-XX	350W	5700	₹35,000
LF45-442-060-57-XX	350W	5700	₹35,000
LF45-502-022-57-XX	400W	5700	₹44,250
LF45-502-060-57-XX	400W	5700	₹44,250
LF45-622-022-57-XX	500W	5700	₹56,990
LF45-622-060-57-XX	500W	5700	₹56,990



Olympus | LF46

Highly advanced LED, technically advanced optic lens with high precision light output and IP66 protection made of aluminum die-cast housing having integral driver

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF46-622-015-57-XX	500W	5700	₹61,990
LF46-622-030-57-XX	500W	5700	₹61,990
LF46-622-060-57-XX	500W	5700	₹61,990
LF46-932-015-57-XX	750W	5700	₹81,250
LF46-932-030-57-XX	750W	5700	₹81,250
LF46-932-060-57-XX	750W	5700	₹81,250
LF46-123-015-57-XX	1000W	5700	₹1,01,990
LF46-123-030-57-XX	1000W	5700	₹1,01,990
LF46-123-060-57-XX	1000W	5700	₹1,01,990
LF46-183-015-57-XX	1500W	5700	₹1,54,990
LF46-183-030-57-XX	1500W	5700	₹1,54,990
LF46-183-060-57-XX	1500W	5700	₹1,54,990



An extensive range of tunnel lighting for effective illumination.

Adequate illumination in the tunnel allows the drivers to quickly adjust to the light and identify the obstacles without compromising their experience. ASPIRE Range of tunnel lighting offers high-lumen outputs with glare-free visibility that prevents fatigue and creates maximum visual comfort.

ASPIRE

Range of Tunnel Lighting



Aspire LF43

Highly advanced LED luminaire with IP66 and IK10 protection made of aluminum extruded housing having technically advanced tunnel light optics IP lens


Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF43-122-SYM-57-XX	80W	5700	Price on Request
LF43-132-SYM-57-XX	120W	5700	
LF43-302-SYM-57-XX	200W	5700	
LF43-452-SYM-57-XX	300W	5700	

- Also available in asymmetric beam angle
- Available in 4000K CCT

i-TMS™

Intelligent Tunnel Management System

The Intelligent Tunnel Management system is a modular and integrated suite, consisting of subsystems that work together for data detection within the tunnel (such as ventilation and pressurization), monitoring the overall infrastructure status, and implementing safety measures in case of fires and accidents.

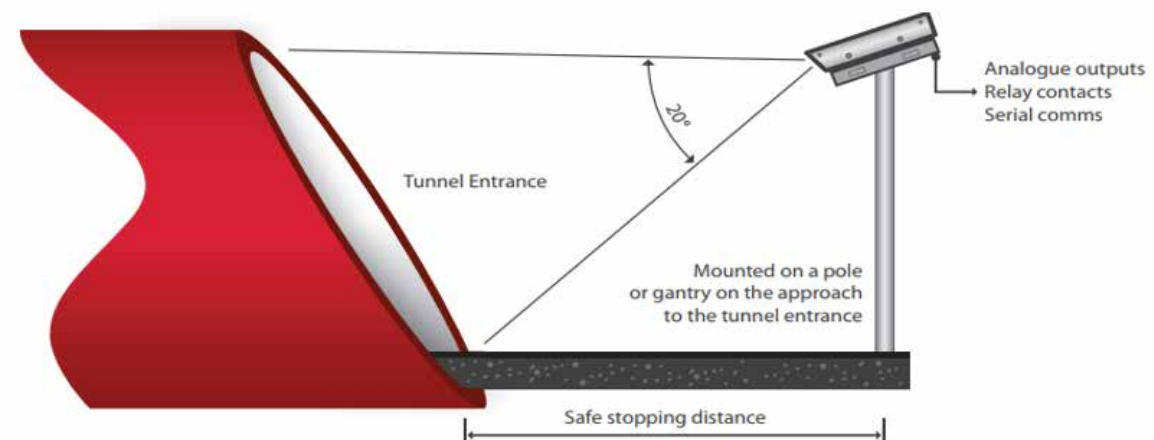



LANDSCAPE LIGHTING



NEW

Vista | LP09

Pure polyester UV resistant powder coated, die-cast aluminium housing with Fresnel diffuser for symmetric light distribution

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP09-431-XXX-57-XX	35W	5700	₹15,550
LP09-501-XXX-57-XX	45W	5700	₹16,550

• Also available in 4000K CCT



NEW

Vista | LP09S

Aesthetically designed pathway lighting system with integrated light having asymmetric light distribution, IP66 rating and aluminium die-cast housing

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP09S-431-XX-57-XX	35W	5700	₹16,550
LP09S-501-XX-57-XX	45W	5700	₹17,550
LP09S-671-XX-57-XX	60W	5700	₹18,990

• Also available in 4000K CCT



NEW

Amethyst Neo | LP10N

Aesthetically designed pathway lighting with IP65 rating made of aluminium die-cast housing, wider light distribution along with opal diffuser for uniform and low-glare lighting

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP10N-431-XX-57-XX	35W	5700	₹19,790
LP10N-501-XX-57-XX	45W	5700	₹19,790
LP10N-671-XX-57-XX	60W	5700	₹19,790

• Also available in 4000K CCT



NEW

Amethyst Flora | LP10F

Aesthetically designed pathway lighting with IP65 rating made of aluminium die-cast housing, wider light distribution along with opal diffuser for uniform and low-glare lighting

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP10F-431-XX-57-XX	35W	5700	₹19,790
LP10F-501-XX-57-XX	45W	5700	₹19,790
LP10F-671-XX-57-XX	60W	5700	₹19,790

• Also available in 4000K CCT



Urbano | LP05

Pressure die-cast aluminium housing which provide uniform light distribution to redefine outdoors and enhance architectural design

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP05-501-XXX-57-G2	45W	5700	₹23,550
LP05-711-XXX-57-G2	60W	5700	₹27,550

• Also available in 4000K CCT



Post Top | LP07

Pure polyester UV resistant powder coated, die-cast aluminium housing with polycarbonate clear diffuser for uniform illumination

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP07-251-XXX-57-CL	20W	5700	₹6,850
LP07-431-XXX-57-CL	35W	5700	₹9,450
LP07-501-XXX-57-CL	45W	5700	₹11,250
LP07-671-XXX-57-CL	60W	5700	₹14,550



Aegis | LP11

Superior aesthetically designed pathway lighting with glare-free soothing solution and IP65 protection made of powder coated aluminium housing for symmetrical and asymmetrical distribution

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LP11-501-XXX-57-XX	45W	5700	₹19,790
LP11-501-ASM-57-XX	45W	5700	₹19,790

• Other CCT options available on request



Whistling Oyster | LB12

Path directional reflector with PC diffuser and extruded aluminium, powder coated bollard, provides uniform illumination for pathways. Sound module is also available as an option to enlighten surroundings with musical notes

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LB12-880-XXX-65-05	7W	6500	₹7,450
LB12-880-XXX-65-08	7W	6500	₹7,450
LB12-880-SPK-65-08	7W	6500	₹27,790
LB12-131-XXX-65-05	11W	6500	₹7,450
LB12-131-XXX-65-08	11W	6500	₹7,450
LB12-131-SPK-65-08	11W	6500	₹27,790

- Option of 3000K CCT is available
- Catalogue no. ending with: 05-Height 500mm; 08-Height 800mm.
- Other CCT options available on request.
- Need to use a Line Matching Amplifier of 75V/100V System for large SPK installation (In Customer Scope)



Whistling J | LB13

Whistling J is a premium LED bollard, with optically designed reflector and indirect-direct, downward directional, high performance, smartly designed asymmetric lighting for landscapes

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LB13-880-XXX-65-05	7W	6500	₹7,690
LB13-880-XXX-65-08	7W	6500	₹7,690
LB13-880-SPK-65-08	7W	6500	₹27,790
LB13-131-XXX-65-05	11W	6500	₹7,690
LB13-131-XXX-65-08	11W	6500	₹7,690
LB13-131-SPK-65-08	11W	6500	₹27,790

- Option of 3000K CCT is available
- Catalogue no. ending with: 05-Height 500mm; 08-Height 800mm.
- Need to use a Line Matching Amplifier of 75V/100V System for large SPK installation (In Customer Scope)



Fantasy Bollard | LB14

Made of extruded aluminium housing to redefine landscapes with better light quality and enhance architectural design Rated IP65

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LB14-880-XXX-65-05	7W	6500	₹8,150
LB14-880-XXX-65-08	7W	6500	₹8,150
LB14-131-XXX-65-05	11W	6500	₹8,150
LB14-131-XXX-65-08	11W	6500	₹8,150

- CCT options available
- Catalogue No. ending with: 05-Height 500mm; 08-Height 800mm



Acorn | LB16

The IP65 bollard offers symmetric light distribution. It features an aluminum casing for efficient heat dissipation and is polyester powder coated for rust and weather resistance. It also offers a high lumen efficacy up to 100lm/w, ideal for eco-friendly lighting solutions.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LB16-111-XXX-57-05	8W	5700	₹6,250
LB16-131-XXX-57-05	11W	5700	₹6,250
LB16-111-XXX-57-08	8W	5700	₹6,250
LB16-131-XXX-57-08	11W	5700	₹6,250

- Available in 4000K CCT
- Catalogue No. ending with: 05-Height 500mm; 08-Height 800mm



Crest | LB15

Weather-proof and durable bollard, provides glare-free and symmetric light distribution making it the perfect solution for all types of walkways

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LB15-111-XXX-57-05	8W	5700	₹5,550
LB15-131-XXX-57-05	11W	5700	₹5,550
LB15-111-XXX-57-08	8W	5700	₹5,550
LB15-131-XXX-57-08	11W	5700	₹5,550

- Available in 4000K CCT
- Catalogue No. ending with: 05-Height 500mm; 08-Height 800mm



Gardenia | LF05

Compact and aesthetic, polyester coated aluminium, housed in ground/bushlight, offers safe and vibrant parking areas, pathways and gardens, with high illumination and a soothing experience

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF05-450-036-27-XX	6W	2700	₹5,550
LF05-600-036-27-XX	8W	2700	₹5,550

- Also available in 24 degrees





arcusTM
prime
Architectural Lighting

Premium outdoor architectural lighting solution.

Lighting is much beyond mere illumination. Colored beams and patterns bring in a strong element of grandeur in facades and structures. With a view to expand outdoor usability and beauty, enhance architectural focal points, improve safety & security, and to increase property value, Wipro introduces Arcus - Premium Outdoor Architectural Lighting Solutions for contour, accent and façade lighting applications.



NEW

Arcus Wall Washer | LF01

High-power luminaire with glare-free light distribution. It comes with an IP67 driver and a glass diffuser.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF01-300-11-30-G2	12W	3000	Price on Request
LF01-151-11-30-G2	18W	3000	
LF01-241-11-30-G2	24W	3000	
LF01-361-11-30-G2	36W	3000	
LF01-481-11-30-G2	48W	3000	
LF01-671-11-30-G2	60W	3000	
LF01-841-11-30-G2	72W	3000	
LF01-122-11-30-G2	96W	3000	

- Also available with 15, 30, 60-degree beam angle
- Also available in RGBW series
- Integrated driver option in Mono G1 series



NEW

Arcus Floodlight | LF39

High efficiency and glare-free luminaire available with integrated IP67 driver up to 40W.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF39-131-015-30-XX	10W	3000	Price on Request
LF39-271-015-30-XX	20W	3000	
LF39-521-015-30-XX	40W	3000	

- Also available with 30 & 45 degree beam angle
- Available with integrated driver



NEW

Arcus Floodlight Round | LF04

Luminaire with high purity lenses for superior performance. It comes with secondary optics and a glass diffuser.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF04-201-06-30-G2	18W	3000	Price on Request
LF04-241-06-30-G2	24W	3000	
LF04-361-06-30-G2	36W	3000	
LF04-481-06-30-G2	48W	3000	
LF04-671-06-30-G2	60W	3000	
LF04-841-06-30-G2	72W	3000	

- Also available with 15, 30, 60-degree beam angle
- Also available in RGBW series




NEW

Arcus Floodlight Rectangular | LF28

High efficacy and LED long life with high purity integrated lens of IP65 protection made of aluminium die-cast housing

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF28-212-11-30-G2	192W	3000	Price on Request
LF28-321-11-30-G2	288W	3000	
LF28-642-11-30-G2	500W	3000	

- Also available with 11, 15, 30, 60 degree beam angle
- Also available in RGBW

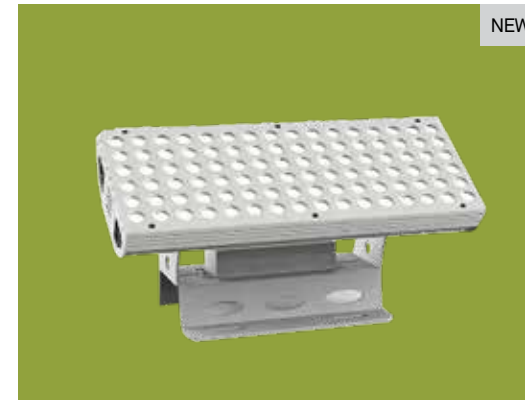


NEW

Arcus Floodlight Rectangular | LF27

High-efficiency and long-life LEDs with glass diffuser. It also has an option of providing snoot in mono series.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LF27-122-11-30-G2	100W	3000	Price on Request
LF27-132-11-30-G2	120W	3000	
LF27-142-11-30-G2	144W	3000	

- Also available with 11, 15, 30, 60 degree beam angle
- Also available in RGBW

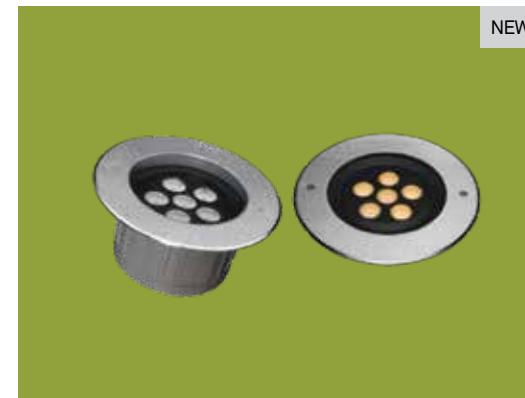

NEW

Inground Light | LI20

A walkover-type fixture with High-efficiency, long-life LEDs, glare-free light distribution having tempered step glass with superior performance high-purity lenses made of Powder-coated and aluminium die-cast housing.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LI20-300-15-30-G2	3W	3000	Price on Request
LI20-101-15-30-G2	9W	3000	
LI20-151-15-30-G2	12W	3000	
LI20-231-15-30-G2	18W	3000	
LI20-222-15-30-G2	24W	3000	
LI20-361-15-30-G2	36W	3000	

- Also available with 30,60-degree beam angle
- Also available in RGBW



Steplight | LT51

Compact, robust, and non-corrosive aluminium body with high lumen output LEDs that enhances the safety and architectural design of step and entrance areas

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LT51-370-XXX-57-XX	3W	5700	₹3,750
LT51-750-XXX-57-XX	7W	5700	₹3,750

- Option of 3000K CCT is available



Arcus Surface/Recessed light | LD08

Technology edge with high efficacy, long life LEDs made of extruded aluminum housing comes with IP65 protection ensures in screen protection & vandal resistant

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LD08-111-020-30-SM	9W	3000	Price on Request
LD08-111-060-30-RM	9W	3000	
LD08-151-029-30-SM	15W	3000	
LD08-151-029-30-RM	15W	3000	
LD08-291-023-30-SM	30W	3000	
LD08-291-060-30-RM	30W	3000	

- Also, available in 4000k & 6500 CCT
- SM: Surface Mounting, RM: Recessed Mounting



Striplight| LS27

Flexible and encapsulated LED strip light. It comes with temporary impression protection with low installation depth and dot-free illumination

Catalogue Reference No.	Wattage/Metre	LP ₹
LS27-14-TB16-30-G1	14W/M	Price on Request
LS27-14-TB16-40-G1	14W/M	
LS27-14-SB10-30-G1	14W/M	
LS27-14-SB10-40-G1	14W/M	
LS27-14-TB16-CCWG1	14W/M	
LS27-18-TB16-CWPG1	18W/M	
LS27-18-SB10-CWPG1	18W/M	
LS27-18-SB10-CCWG1	18W/M	



Arcus Under Water Light | LU03

Hard chrome plated stainless steel with silicon sealed glass, offers colourful illumination for waterbodies in architectural and landscape areas

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LU03-950-030-30-XX	6W	3000	Price on Request
LU03-211-030-30-XX	8W	3000	
LU03-371-030-30-XX	36W	3000	

- Driver to be ordered separately. Replace 30 with 60 in the above catalogue no. for 6000K CCT
- Also available in RGBW series



Arcus Wall light | LW35

Technology edge with high efficacy, long life LEDs made of extruded aluminum housing comes with IP65 glass diffuser ensures in screen protection & vandal resistant

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LW35-750-020-30DNX	6W	3000	Price on Request
LW35-131-029-30DNX	12W	3000	
LW35-191-029-30DNX	18W	3000	
LW35-151-020-30UDX	2X6	3000	
LW35-271-029-30UDX	2X12	3000	
LW35-361-029-30UDX	2x18	3000	

- Also, available in 6500 CCT
- DNX: Wall Down light, UDX: Wall Up-down light



Arcus Driver | LG34

An IP66 driver for all luminaires made of extruded aluminum metal housing enclosure with surge protection having thermal shutdown, short circuit, and over loaded protection.

Catalogue Reference No.	Wattage (W)	Output	LP ₹
LG34-075-24-3AIP65	75W	24V DC	Price on Request
LG34-120-24-5AIP66	120W	24V DC	
LG34-150-24-6AIP66	150W	24V DC	
LG34-240-24-10IP66	240W	24V DC	



NEW

Arcus Accessories

Arcus accessories comprise of a DMX master controller, DMX decoder, keypad button and splitter/booster.

Catalogue Reference No.	Wattage (W)	LP ₹
WL-DMX 604	DMX decoder that operates on Input DC 12V-24V 6 channels.	Price on Request
WL-DIN 1024	DMX master controller that controls from 512 to 1024 channels.	
WL-BUTTON 6	6 individual push buttons that can trigger the dry ports contact	
WL-SPL 26	6-output DMX splitter takes DMX signal & splits into 6 separate output channels.	



Arcus T and S Connectors

An IP67 straight (S) and T type, 2 and 5 core connectors used when multiple luminaires are to be controlled with a single driver.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
C-5C-S-IP67	IP67 S Type 5 Core Connector	Price on Request	
C-5C-T-IP67	IP67 T Type 5 Core Connector		
C-2C-S-IP67	IP67 S Type 2 Core Connector		
C-2C-T-IP67	IP67 T Type 2 Core Connector		





SolaRISE



SolaRISE | LR19

All-in-one integrated solar street lights.
High efficiency, eco-friendly streetlight with compact aesthetic construction and easy installation capability.

Catalogue Reference No.	Wattage (W)	CCT (K)	LP ₹
LR19-221-XXX-57-XX	12W	5700	₹43,690
LR19-281-XXX-57-XX	15W	5700	₹51,190
LR19-331-XXX-57-XX	18W	5700	₹58,750
LR19-371-XXX-57-XX	20W	5700	₹75,990
LR19-461-XXX-57-XX	25W	5700	₹78,590
LR19-561-XXX-57-XX	30W	5700	₹83,250
LR19-751-XXX-57-XX	40W	5700	₹96,090
LR19-931-XXX-57-XX	50W	5700	₹1,15,990
LR19-112-XXX-57-XX	60W	5700	₹1,37,250
LR19-132-XXX-57-XX	70W	5700	₹1,43,450
LR19-152-XXX-57-XX	80W	5700	₹1,49,790
LR19-162-XXX-57-XX	90W	5700	₹1,97,150
LR19-182-XXX-57-XX	100W	5700	₹2,12,050
LR19-222-XXX-57-XX	120W	5700	₹2,37,090

- For hybrid operation, all-in-one integrated solar streetlight, replace XX with HY in the above catalogue nos
- Additional LP of ₹10,000 for Hybrid
- Other CCT options available on request
- Prices given are exclusive of poles and to be ordered separately. Subject to minimum order quantity

Items to be phased out (MWS)

Series Catalogue	Reference No.	Wattage
Immaculate+	CRCO10R020HP57HEG2	20W
	CRCO10R024HP57HEG2	24W
	CRCO10R030HP57HEG2	30W
	CRCO10R036HP57HEG2	36W
Immaculate Trimless	CRCO10R024HP57TLG2	24W
	CRCO10R038HP57TLG2	30W
	CRCO10R036HP57TLG2	36W
Immaculate Smart	CRCO10R030TL57UGSN	30W
Immaculate Soft	CRCO10R030HP57UGG2	30W
	CRCO10R036HP57UGG2	36W
	CRCO10S030HP57UGG2	30W
	CRCO10S036HP57UGG2	36W
Immaculate	CRCO10R038HP57G2	30W
	CRCO10S038HP57G2	30W
	CRCO10R036HP57G2	36W
	CRCO10S036HP57G2	36W
Photon	LM10-451-XXX-65-G2	36W
	LM10-451-XXX-40-G2	36W
Lineos	LM30-211-XXX-57-G2	20W
	LM30-211XXX-57G2CT	20W
	LM30-401-XXX-57-G2	30W
	LM30-401XXX-57G2CT	30W
Lineos	LM31-211-XXX-57WG1	20W
	LM31-211-XXX-57WCG1	20W
	LM31-401-XXX-57WG1	30W
	LM31-401XXX-57WCG1	30W
	LM31-421-XXX-57WG1	40W
	LM31-421XXX-57WCG1	40W
	LM31-801-XXX-57WG1	60W
	LM31-801XXX-57WCG1	60W
Aslimline	LM77-441-XXX-57-V1	32W
	LM77-441-XXX-57UGV1	32W
	LM77-521-XXX-57-V1	32W
	LM77-521-XXX-57UGV1	32W
Suspension for Aslimline	LMX771	
	LMX772	
	LMX773	
Helios	LD90-111-XXX-65-XX	9W
	LD90-141-XXX-65-XX	12W
	LD90-191-XXX-65-XX	15W
	LD90-231-XXX-65-XX	18W
inSync Opus	LM38-361-XXX-2765	32W
inSync Verge	LM29-451-XXX-2765	33W
inSync Mollis	LD06-301-XXX-2765	24W
inSync Immaculate+	CRCO10R036HP2765	33W

Series Catalogue	Reference No.	Wattage
inSync Axeon	LM34-361-XXX-2765	29W
	LM34-721-XXX-2765	58W
inSync Axeon	LM34-251-XXX-2765	20W
	LM34-501-XXX-2765	40W
inSync Touch Panel	192HW+290W+402	
	192HB+290B+402	
	191HW+290W+402	
	191HB+290B+402	
eSense Group Light Sensor - Smart PIR Occupancy Sensor	GLPS01R010A	
	GLPS01S010A	
	GLPS01P010A	
eSense Group Light Sensor - Smart PIR Occupancy Detector with Switching Photocell	GLPS02R010A	
	GLPS02S010A	
	GLPS02P010A	
eSense Group Light Sensor - Smart Daylight PIR Occupancy Detector, with DALI Output	GLPSDA01R010A	
	GLPSDA01S010A	
	GLPSDA01P010A	
eSense Group Light Sensor - Smart Daylight PIR Occupancy Detector, with ANALOG Output	GLPSAN01R010A	
	GLPSAN01S010A	
	GLPSAN01P010A	
eSense Group Light Sensor -Smart Dimmable Sensor with PIR Presence Detector PoE (Power over Ethernet)	GLPSIGAN01R010A	
	GLPSIGAN01S010A	
	GLPSIGAN01P010A	
IR Remote	SDC-IR-REMO	
eSense Wall Mount Light Sensor - Smart PIR Occupancy Sensor	WMPS01R010A	
eSense Wall Mount Light Sensor - Wall Mounted Occupancy Detector with Switching Photocell	WMPS02R010A	
eSense Wall Mount Light Sensor - Wall Mounted PIR Occupancy Detector with DALI Output	WMPSDA01R010A	
	WMPSAN01R010A	
eSense Wall Mount Light Sensor - Wall Mounted PIR Occupancy Detector with ANALOG Output	WMPSAN01R010A	

Items to be phased out (Industry)

Series Catalogue	Reference No.	Wattage
Highbay	LH21-102-060-57-X1	UNO Highbay - 80W 60° 5700K X1
	LH21-122-060-57-X1	UNO Highbay - 100W 60° 5700K X1
	LH21-152-060-57-X1	UNO Highbay - 120W 60° 5700K X1
	LH21-172-060-40-X1	UNO Highbay - 140W 60° 4000K X1
	LH21-182-060-57-X1	UNO Highbay - 150W 60° 5700K X1
	LH21-212-060-57-X1	UNO Highbay - 160W 60° 5700K X1
	LH21-222-060-57-X1	UNO Highbay - 180W 60° 5700K X1
	LH21-252-060-57-X1	UNO Highbay - 200W 60° 5700K X1
	LH21-122-060-57-XX	UNO Highbay - 80W 60 BEAM 5700K
	LH21-162-060-57-XX	UNO Highbay - 100W 60 BEAM 5700K
	LH21-192-060-57-XX	UNO Highbay - 120W 60 BEAM 5700K
	LH21-222-060-57-XX	UNO Highbay - 140W 60 BEAM 5700K
	LH21-242-060-57-XX	UNO Highbay - 150W 60 BEAM 5700K
	LH21-262-060-57-XX	UNO Highbay - 160W 60 BEAM 5700K
	LH21-292-060-57-XX	UNO Highbay - 180W 60 BEAM 5700K
	LH21-322-060-57-XX	UNO Highbay - 200W 60 BEAM 5700K
Xline Neo	LE10-251-XXX-57-XX	Xline Neo LED Channel-20W 57K
	LE10-491-XXX-57-XX	Xline Neo LED Channel - 39W 5700k

• Phase out of all Beam Angles, CCTs & Accessories

Items to be phased out (Outdoor)

Series Catalogue	Reference No.	Wattage
Skyline	LR02-261-XXX-57-XX	20W
	LR02-291-XXX-57-XX	25W
	LR02-182-XXX-57-G2	150W
	LR02-242-XXX-57-G2	200W
	LR02-262-XXX-57-G2	220W
	LR02-292-XXX-57-G2	250W
Skyline Plus	LR06-251-XXX-57-XX	18W
	LR06-311-XXX-57-XX	25W
	LR06-112-XXX-57-XX	100W
	LR13-671-XXX-57-XX	60W
	LR06-501-XXX-57-XX	35W
	LR06-611-XXX-57-XX	45W
Ranger	LF30-622-060-57-XX	500W
	LF30-932-060-57-XX	750W
	LF30-123-060-57-XX	1000W
	LF30-392-060-57-XX	300W
	LF30-442-060-57-XX	350W
Alpha Floodlight	LF19-471-060-57-XX	40W
	LF19-711-060-57-XX	60W
	LF19-931-060-57-XX	80W

Items to be phased out (Outdoor)

Series Catalogue	Reference No.	Wattage
Old Arcus Range	LF01-181-030-30-05	20W
	LF01-361-030-CC-10	40W
	LF01-361-030-CC-05	20W
	LF03-601-XXX-30-05	09W
	LF03-601-XXX-60-05	09W
	LF03-121-XXX-30-10	17W
	LF03-121-XXX-60-10	17W
	LS27-005-120-WW-50	10W/M
	LS27-005-120-CC-50	10W/M
	LF04-181-030-30-XX	12W
	LF04-251-030-CC-XX	20W
	LF04-501-030-30-XX	40W
	LF04-181-030-CC-XX	12W
	LF04-251-030-CC-XX	20W
	LF04-501-030-CC-XX	40W
	LI20-600-030-CC-XX	12W
	LI20-111-030-CC-XX	20W
	LI20-231-030-CC-XX	40W
	LW31-211-022-30-XX	18W
	LW31-321-022-30-XX	24W
	LW31-101-022-30-XX	02W
	LF27-601-040-30-XX	58W
	LF27-901-040-30-XX	85W
	LF27-122-040-30-XX	113W
	LF27-601-040-CC-XX	58W
	LF27-901-040-CC-XX	85W
	LF27-122-040-CC-XX	113W
	LF28-142-040-30-XX	158W
	LF28-242-040-30-XX	286W
	LF28-482-040-30-XX	580W
	LF28-142-040-CC-XX	158W
	LF28-242-040-CC-XX	286W
	LF28-482-040-CC-XX	580W
	LT50-050-XXX-30-XX	02W
	LG70-360-3M-24V	-
	LG70-360-3E-24V	-
	LG70-360-3M-48V	-

Terms and conditions

- Prices are in Indian rupees
- MRP is inclusive of GST
However authorized Wipro sales person/stockists can sell below the MRP
- In case of LP, GST amount is not included. GST is to be added extra
However, authorized Wipro sales person/stockists can sell below the LP
- All prices are subject to Wipro's general terms & conditions of business
- Prices are subject to change without notice as per company discretion
- This price list supersedes all earlier price lists
- Company reserves the right to issue amendments, which may arise due to any errors in the price list
- Goods are dispatched by us on purchaser's risk. All claims for loss, damage or shortage will be filed by the purchasers directly with the carriers
- Orders should be placed in multiples of case lot
- All orders shall be placed in writing
- Items other than those included in the price list, stand phased out from the range
- All fixtures will be supplied as per our normal specifications. For additional features, please contact the nearest Wipro office for details
- Disputes, if any, are subject to Pune jurisdiction only
- Related wattage and CCT are nominal and BIS tolerance is applicable on the same. Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in part or in whole, without permission, is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Photographs shown herein are indicative. Customers are advised to reconfirm the data or product dimensions, before purchase, with our local office

Branch Offices

E40/7, Okhla Industrial Area, Phase-II, New Delhi - 011 020. Tel: 011 - 4170 8122 / 29	Lotus Corporate Park, Unit No 1401 - 1402, 14 th Floor, C Wing, Graham Firth Steel Compound, Western Express Highway, Goregaon (E), Mumbai - 400 063. Tel: 022 - 6218 2000
No.139, 7 th Cross, N S Palya, Off. Bannerghatta Road, Bangalore - 560 076. Tel.: 080 - 4150 3260	4 th Floor, Svalar Square, 15, North Phase, Guindy Industrial Estate, Ekkaduthangal, Chennai - 600 032. Tel: +91 - 994 049 9275
3, Pretoria Street, 3 rd Floor, Kolkata - 700 071. Tel: 033 - 4404 5886 / 87	Bhosale Heights, 1195/5, Fergusson College Road, Pune - 411 005. Tel: 020 - 2553 5081
Surya Towers, 6 th floor, Sardar Patel Road, Hyderabad - 500 003. Tel: 040 - 2717 6082	C/O Wipro Enterprise Pvt Ltd, SCO-1066-1067, Top Flood , Sector 22-B , (Near HDFC Bank), Chandigarh - Pin Code 160022.
United Compound, A B Road, Dewas Naka, Indore - 452 010. Tel: +91 982 799 9668	E/149, Transport Nagar, Lucknow Kanpur Road, Lucknow - 226 012. Tel: 0522 - 243 4352
Khata No. - 349/536, Plot No. 52, Andhei Sahi, New Industrial Estate, Jagatpur, Cuttack - 754 200. Phone no: +91 900 703 4259	409 - 410, Scarlet Gateway, Opp. Rivera Anatalia, Corporate Road, Nr. Prahladnagar Garden, Satellite, Ahmedabad - 380 015. Tel: 079 - 4007 3546
Flat No. 8, Plot No. 191, 1 st Floor, Rachna Apartment, Cement Road, Shivaji Nagar, Nagpur - 440 010. Tel: 0712 - 256 9878	Khasra No. 48-49/2, Khedia Business Park, Tatibanth, Raipur - 492 099. Tel: 0771 - 326 5725
M/s Wipro Enterprises P Ltd, 680 & 680-A1, Seaport- Airport Road, Irumbanam, Cochin, Kerala	Plot No. 90/24, D-Block, IDA, Autonagar, Vizag - 530 012. Tel no: 91 929 565 6143
9/10, Sri Vankatram Complex, VLB Nagar, OPP VLB Arts & Science College, Kovaipudur Road, Kuniamuthur, Coimbatore - 641 042. Tel: +91 807 820 2741	Wipro Enterprises Pvt. Ltd. Jaipur Depot, A-71, Road No 1, Vishwakarma Industrial Area, Jaipur - 302213