



wipro advantage



30 years
of Expertise
in Lighting



18 branches
across India



Customized
Solutions



Pan India
After Sales
Support



Registered Office: Wipro Enterprises (P) Ltd. 'Wipro House', No. 8, 7th Main, 80 Feet Road, Koramangala, 1st Block, Bangalore 560034, Karnataka, India.

Business Office: Wipro Lighting, 5th Floor, Godrej Eternia - C, Old Pune-Mumbai Highway, Shivajinagar, Pune 411 005, India.
(T) 020-66098700, (F) 020-66098777 | helpdesk.lighting@wipro.com



www.wiprolighting.com | Toll free no: 1800 425 1969 | helpdesk.lighting@wipro.com

Follow us on: [in](#) [t](#) [f](#) [i](#) [y](#)

Ahmedabad: 079 - 4007 3546

Bangalore: 080 - 4150 3260

Baroda: 0265 - 239 5830 / 35 / 36 / 41 / 45

Bhubaneshwar: 1800 425 1969

Chandigarh: +91 981 570 8102 /
+91 921 610 8102

Chennai: 1800 425 1969

Cochin: 1800 425 1969

Coimbatore: 1800 425 1969

Hyderabad: 040 - 2717 6082

Indore: +91 982 799 9668

Jaipur: 1800 425 1969

Kolkata: 033 - 4404 5886 / 87

Lucknow: 0522 - 243 4352

Mumbai: 022 - 6218 2000

Nagpur: 0712 - 256 9878


New Delhi: 011 - 4170 8121 / 29

Pune: 020 - 2553 5081

Raipur: 0771- 326 5725

Vishakhapatnam: +91 967 690 8080



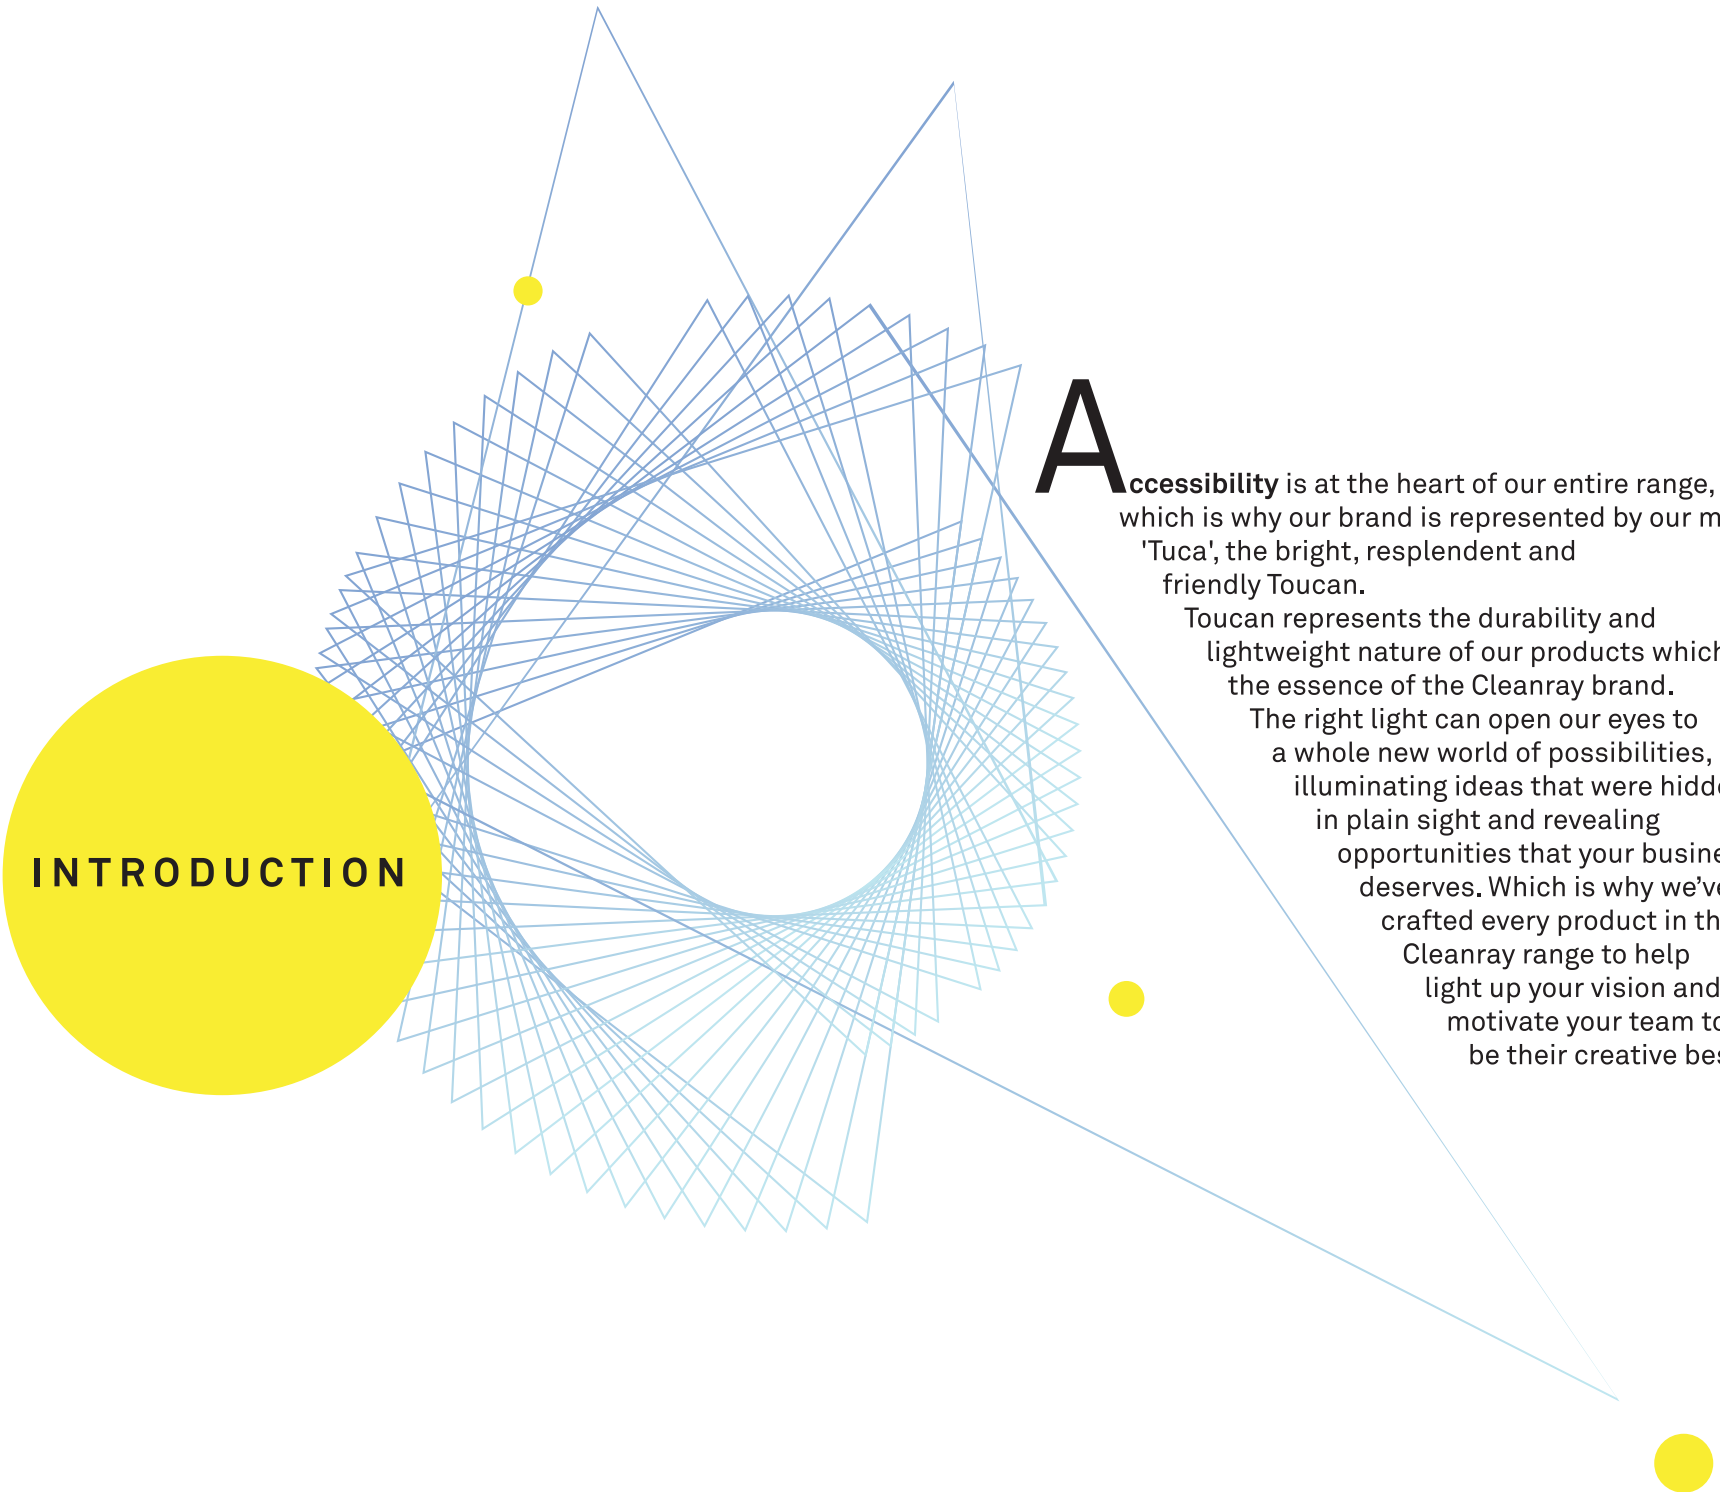

INTRODUCTION

Accessibility is at the heart of our entire range, which is why our brand is represented by our mascot 'Tuca', the bright, resplendent and friendly Toucan.

Toucan represents the durability and lightweight nature of our products which is the essence of the Cleanray brand.

The right light can open our eyes to a whole new world of possibilities, illuminating ideas that were hidden in plain sight and revealing opportunities that your business deserves. Which is why we've crafted every product in the Cleanray range to help light up your vision and motivate your team to be their creative best.

A P P L I C A T I O N S



Conference Rooms



Offices



Hotels



Auditoriums



Campuses



Banks



Lecture Halls



Parkings



Resorts



Reception Areas



Corridors



Retails



Art Galleries



Perimeter Lighting



Museums



Homes



Hospitals



Townships



Showrooms



Factories



Gardens



Secondary Roads



Parks



Entrances

I N D E X

LINEAR RANGE		2x2 RANGE		CEILING DOWNLIGHT	
LINEA	Page 06	KOMBAT	Page 10	IRIS SLIM SQUARE	Page 14
				IRIS SLIM ROUND	Page 18
				IRIS SLIM SURFACE MOUNTED LD81	Page 20

CEILING DOWNLIGHT				
IRIS SLIM SURFACE MOUNTED LD80	Page 22	IRIS NEO NEXTGEN	Page 24	EOS SQUARE
			Page 26	EOS ROUND
			Page 28	CYLINDRO
				Page 30

CEILING DOWNLIGHT		READING LAMP		LED STAIR LIGHT
GLITZ LED	Page 32	SOLAS	Page 36	ATOM
			Page 38	READING LAMP
			Page 40	STEPLIGHT
				Page 42

LED TUBE	BATTEN		LED STRIP LIGHT	OUTDOOR LIGHTING	
PRO LED LAMP	Page 46	TRIM NEO FAMILY	Page 52	FORMZ	Page 58
			Page 58	MOON LED	Page 60
				BUSHLIGHT	Page 62

OUTDOOR LIGHTING				
BULKHEAD	Page 64	EXTERIO WALL LIGHTS	Page 66	EXTERIO WALL LIGHTS
			Page 68	ALPHA NEO FLOODLIGHT
			Page 70	SKYLINE NEO
				Page 72

BULB				
BRILLANTE	Page 76			



LINEA



L I N E A R R A N G E


Clean, efficient and minimal;
our range of linear lighting
solutions add a touch of class to
any environment they come into.



- Extruded aluminium housing, powder coated in white or black matt finish with engineering plastic end cap.
- High efficacy LEDs with option of CCT; with uniform and optimum light output.
- High Efficiency Translucence (HET) flush diffuser for a soft and soothing experience.
- Suspension kit included.
- Sliding suspension and diffuser for easy installation.
- 50,000 hrs life as per L70.
- 3 KV SPD.

CONTROL GEAR
• Electronic LED driver.

DIMENSIONAL DRAWINGS:

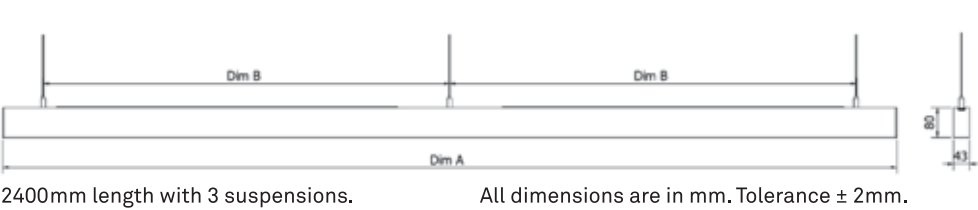

- INSTALLATION**
- 1.0 mtr. suspension, which is part of the product/packed along with the product is suitable for installation on RCC ceiling (2 nos. for 1200mm and 3 nos. for 2400mm product).
 - Clamp for 24mm modular grid armstrong prelude ceiling to be ordered separately – Code No. LMX2243.
 - Clamp for 15mm modular grid armstrong silhouette grid to be ordered separately – Code No. LMX225.

APPLICATIONS



ELECTRICAL & PACKING DATA				IP20
Catalogue Reference No.	Wattage (W)	Length (mm)	Case Lot (Nos)	Housing Colour
LM22-251-XXX-40-WX	20	1200	10	White
LM22-251-XXX-57-WX	20	1200	10	White
LM22-251-XXX-40-BX	20	1200	10	Black
LM22-251-XXX-57-BX	20	1200	10	Black
LM22-501-XXX-40-WX	40	2400	6	White
LM22-501-XXX-57-WX	40	2400	6	White
LM22-501-XXX-40-BX	40	2400	6	Black
LM22-501-XXX-57-BX	40	2400	6	Black

2 X 2 R A N G E

Our Kombat range offers the most soothing light you will experience. The sleek design and uniform lighting make it fit seamlessly in every area.



KOMBAT



K O M B A T

Recess mounted backlit luminaire

- Slim design for seamless look
- White powder coated housing with aluminium frame.
- High Efficiency Translucence (HET) diffuser for better light transmission.
- High efficacy LEDs.
- IP20.
- 50,000 hrs life as per L70.
- 3 KV SPD.

APPLICATIONS




INSTALLATION

- Suitable for grid type ceiling.


CONTROL GEAR

- In-built integrated Electronic LED driver.


Available in



DIMENSIONAL DETAILS:



All dimensions are in mm. Tolerance ± 2 mm.

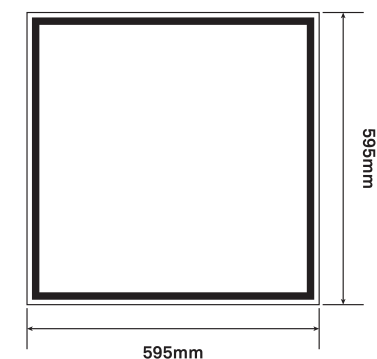

ELECTRICAL DATA

IP20

Catalogue Reference No.	Wattage (W)	Rated Voltage(V)	Mains current (A)	Case Lot (Nos)
CRCO24R036HP40G2	36	240	0.16	02
CRCO24R036HP65G2	36	240	0.16	02

CCT*65 Stands for 6500K, *40 Stands for 4000K



C E I L I N G D O W N L I G H T

Our wide array of downlights offer a variety of solutions, from offices to interiors. The clean aesthetics provide a perfect blend of functionality and style.

IRIS SLIM

IRIS NEO NEXTGEN

EOS

CYLINDRO

GLITZ

SOLAS

SLEEK

ATOM





I R I S S L I M S Q U A R E

Ultra sleek recess mounted
slim square panel light.

- White powder coated, pressure die cast aluminium housing and bottom frame.
- Slim luminaire with high transmissive LGP technology.
- High efficiency, non-yellowing PMMA diffuser.
- Excellent thermal management with die cast aluminium construction.
- Specially designed, easy to install mounting clips.
- Complete with LEDs, driver and accessories, prewired up to terminal block.
- Suitable for Armstrong/CRG/TRAC/USG/Celotex/POP modular ceiling system.


CONTROL GEAR OPITON

- Electronic LED driver.

APPLICATIONS




DIMENSION DRAWINGS:

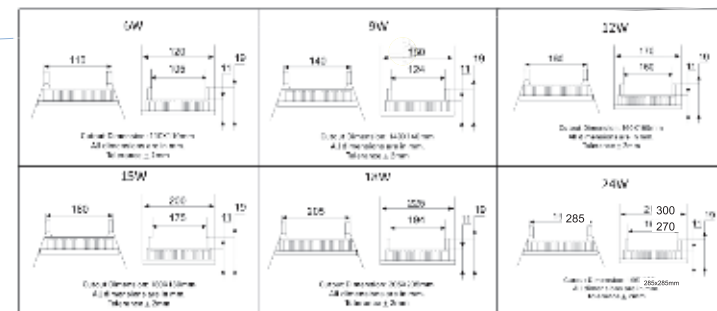

All dimensions are in mm. Tolerance ± 2 mm.

Available in



DIMENSIONS TABLE SQUARE

PARAMETER	6W	9W	12W	15W	18W	24W
Length	120	150	170	200	225	300
Height	19	19	19	19	19	20
Cutout	110x110	140x140	160x160	180x180	205x205	285x285

ELECTRICAL & PACKING DATA

IP20

Iris Slim SQ

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD81-350-XXX-60-XX	6W	240	0.03	20
LD81-530-XXX-60-XX	9W	240	0.05	20
LD81-101-XXX-60-XX	12W	240	0.06	20
LD81-131-XXX-60-XX	15W	240	0.06	20
LD81-171-XXX-60-XX	18W	240	0.06	20
LD81-281-XXX-60-XX	24W	240	0.105	05

• Also available in 3000K and 4000K. To order, replace 60 with 30/40 in the above catalogue.



IRIS SLIM ROUND

Ultra sleek recess mounted
slim round panel light.

- White powder coated, pressure die cast aluminium housing and bottom frame.
- Slim luminaire with high transmissive LGP technology.
- High efficiency, non-yellowing PMMA diffuser.
- Excellent thermal management with die cast aluminium construction.
- Specially designed, easy to install mounting clips.
- Long Life 50,000 burning hours as per L70B50
- Complete with LEDs, driver and accessories prewired up to terminal block
- Suitable for Armstrong/CRG/TRAC/USG/Celotex/POP modular ceiling system


CONTROL GEAR OPITON

- Electronic LED driver

APPLICATIONS




DIMENSION DRAWINGS:

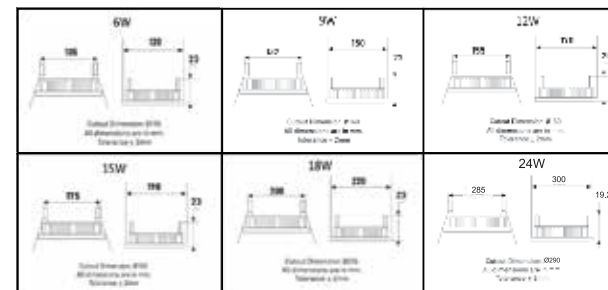

All dimensions are in mm Tolerance: ± 2 mm

Available in



DIMENSIONS TABLE ROUND

PARAMETER	6W	9W	12W	15W	18W	24W
Diameter	120	150	170	198	225	300
Height	23	23	23	23	23	23
Cutout	110	140	160	180	205	290

ELECTRICAL & PACKING DATA

IP20

Iris Slim RO

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD80-350-XXX-60-XX	6W	240	0.02	20
LD80-530-XXX-60-XX	9W	240	0.03	20
LD80-101-XXX-60-XX	12W	240	0.05	20
LD80-131-XXX-60-XX	15W	240	0.06	20
LD80-171-XXX-60-XX	18W	240	0.06	20
LD80-281-XXX-60-G1	24W	240	0.10	05

• Also available in 3000K and 4000K. To order, replace 60 with 30/40 in above catalogue




I R I S S L I M S U R F A C E M O U N T E D


Ultra sleek surface mounted
slim panel light.

- White powder coated pressure die cast aluminium housing and bottom frame
 - Slim luminaire with high transmissive LGP technology
 - High efficiency, non-yellowing PMMA diffuser
 - Excellent thermal management with die cast aluminum construction
 - Specially designed, easy to install mounting clips
 - Long Life 50,000 burning hours as per L70B50
 - 2.5 KV SPD
- INSTALLATION**
- Suitable for Armstrong/CRG/TRAC/USG/Celotex/POP modular ceiling system
- CONTROL GEAR OPITON**
- Electronic LED driver


APPLICATIONS

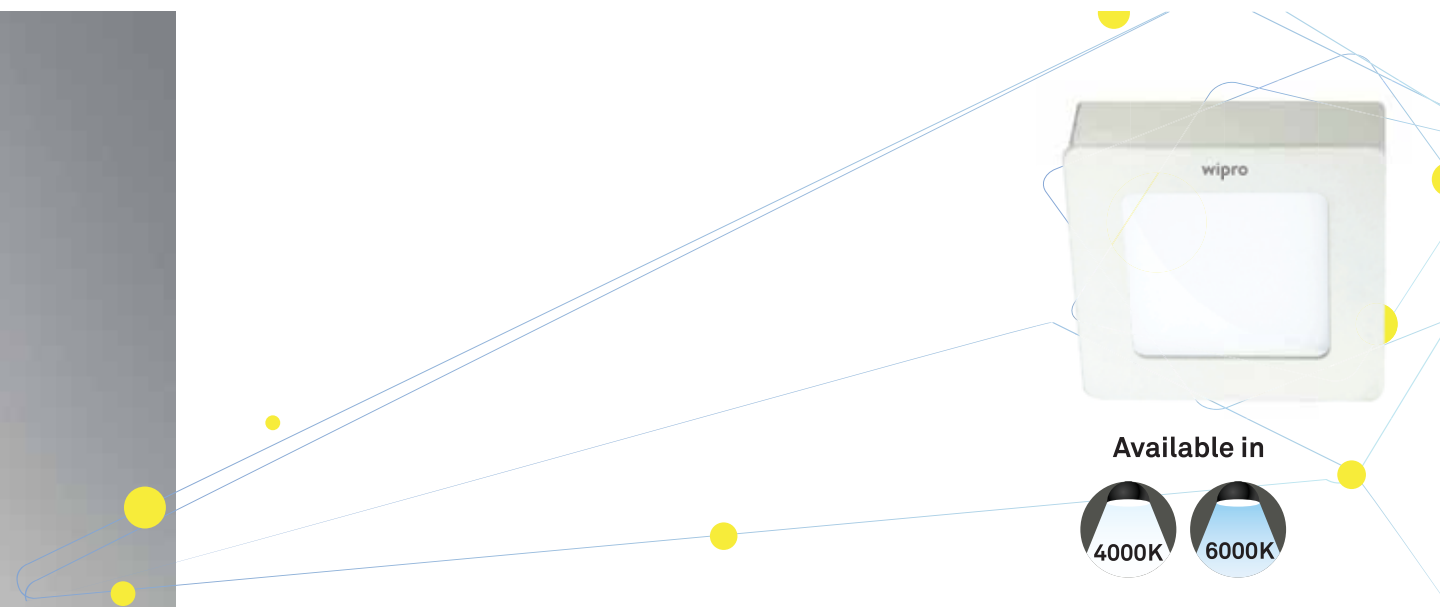

Available in



DIMENSIONAL DRAWINGS:

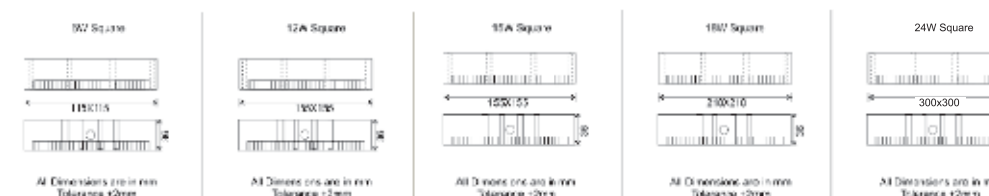

All dimensions are in mm. Tolerance ± 2 mm.

ELECTRICAL & PACKING DATA

IP20

Iris Slim Surface Mounted SQ

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD81-350-XXX-60-SM	6W	240	0.03	12
LD81-101-XXX-60-SM	12W	240	0.05	18
LD81-131-XXX-60-SM	15W	240	0.06	20
LD81-171-XXX-60-SM	18W	240	0.08	06
LD81-271-XXX-65-SM	24W	240	0.10	05

• Also available in 3000K and 4000K. To order, replace 60 with 30/40 in above catalogue



I R I S S L I M S U R F A C E M O U N T E D

Ultra sleek surface mounted
slim panel light.

- White powder coated pressure die cast aluminium housing and bottom frame.
 - Slim luminaire with high transmissive LGP technology.
 - High efficiency, non-yellowing PMMA diffuser.
 - Excellent thermal management with die cast aluminum construction.
 - Specially designed, easy to install mounting clips.
- Long Life 50,000 burning hours as per L70B50.
 - 2.5 KV SPD


INSTALLATION

- Suitable for Armstrong/CRG/TRAC/USG/Celotex/POP modular ceiling system.


CONTROL GEAR OPITON

- Electronic LED driver.


APPLICATIONS

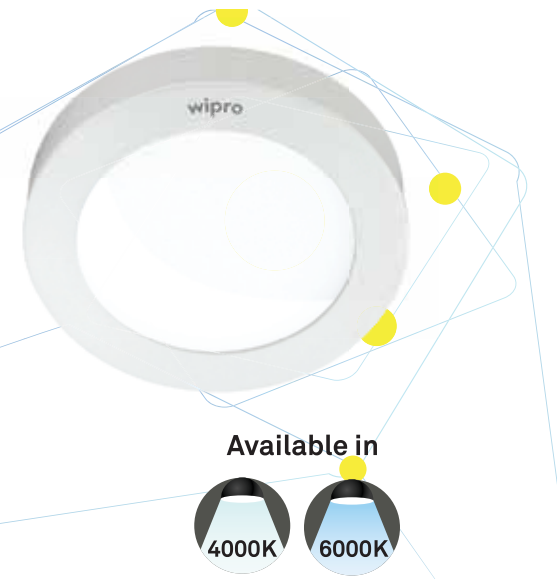

Available in



DIMENSION DRAWINGS:

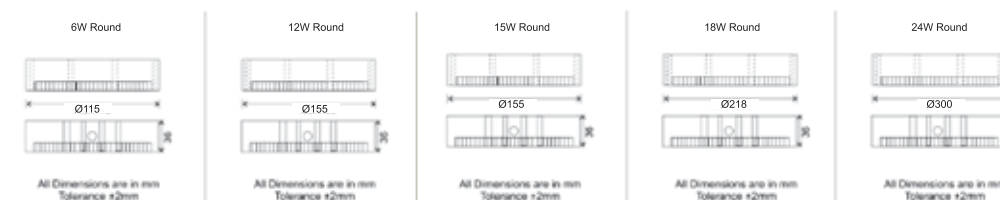

All dimensions are in mm. Tolerance ± 2 mm.

ELECTRICAL & PACKING DATA

IP20

Iris Slim Surface Mounted Round

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD81-350-XXX-60-SM	6W	240	0.03	12
LD81-101-XXX-60-SM	12W	240	0.05	18
LD81-131-XXX-60-SM	15W	240	0.06	20
LD81-171-XXX-60-SM	18W	240	0.08	06
LD80-281-XXX-65-SMG1	24W	240	0.01	05

• Also available in 3000K and 4000K. To order, replace 60 with 30/40 in the above catalogue.



I R I S N E O N E X T G E N

Slim Led Downlighter

- Aesthetic slim profile for contemporary interiors.
- White colour injection molded body made up of polycarbonate.
- High Transmittivity Diffuser.
- Specially designed, easy to install mounting clips.
- Slim with backlit technology.
- Long Life 50,000 burning hours as per L70B50.
- 2.5 KV SPD

INSTALLATION

- Suitable for Armstrong/CRG/TRAC/USG/Celotex/POP modular ceiling system.


CONTROL GEAR OPITON

- Electronic LED driver.


APPLICATIONS



DIMENSIONAL DRAWINGS:

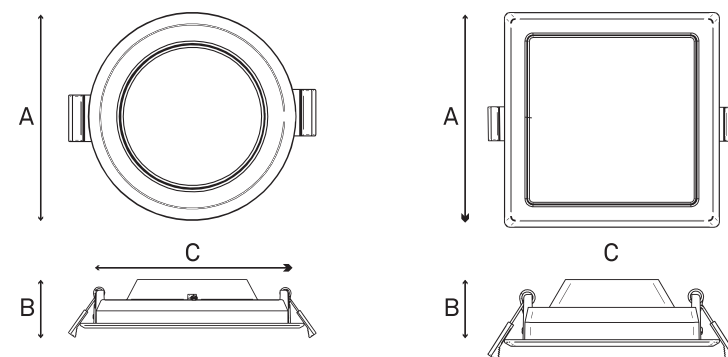

Available in



DIMENSIONAL DETAILS

PARAMETER	6W	9W	12W	15W	18W
Height (B)	35mm	35mm	35mm	35mm	35mm
Dia/Sq (A)	116mm	116mm	166mm	166mm	220mm
Ceiling Cutout Dia/ Sq (C)	100mm	100mm	150mm	150mm	205mm

ELECTRICAL & PACKING DATA


IP20

Iris Neo Nextgen

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD95-670-XXX-65-G1	6W	240	0.026	20
LD95-101-XXX-65-G1	9W	240	0.04	20
LD95-141-XXX-65-G1	12W	240	0.05	20
LD95-171-XXX-65-G1	15W	240	0.065	20
LD95-221-XXX-65-G1	18W	240	0.08	20

Please order Cat No. starting with LD96 for square downlighter.

Also available in 4000K. To order, replace 65 with 40 in the above catalogue.

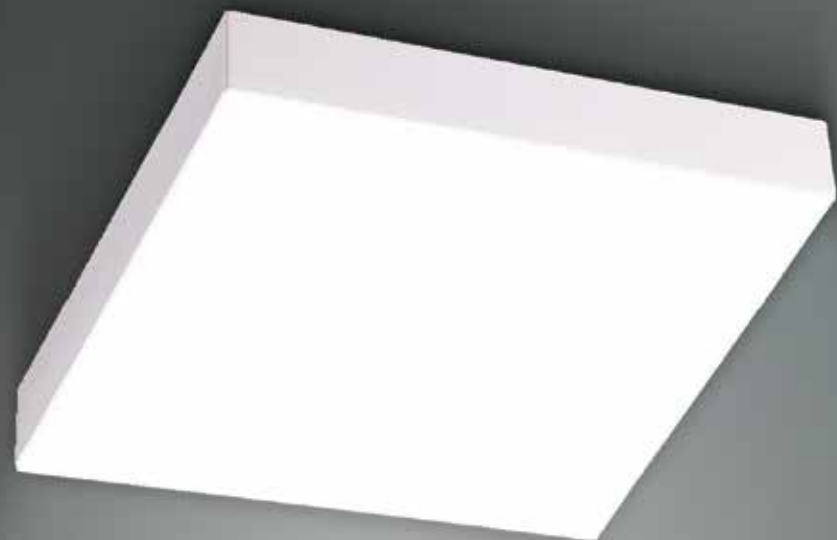

EOS S Q U A R E

Surface mounted Rimless LED downlight

- Bezel less design with edge to edge lighting creating great aesthetics.
- PS with aluminium heat sink for lighter weight and durability.
- High transmissivity PC diffuser provides better output and weather resistance.
- High efficacy LEDs creating uniform and optimum light output.
- Specially designed, easy to install metal mounting bracket.
- Suitable for surface mounting on ceiling.
- Easy installation and long service life of 50,000 burning hrs as per L70B50.
- 2.5 KV Surge Protection (Built-In)

INSTALLATION

- Suitable for all ceiling systems.



CONTROL GEAR OPTION

- Integral LED driver.


APPLICATIONS



DIMENSIONAL DRAWING:

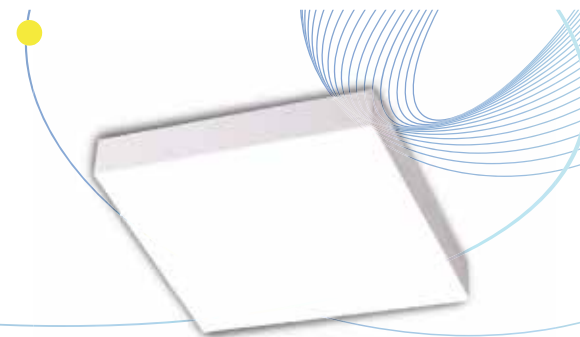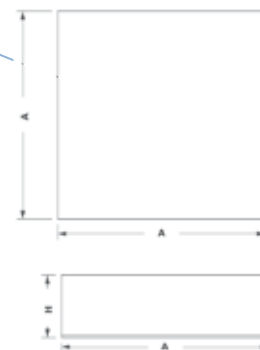

Available in



Product	A mm	H mm
LD66S (6W)	90x90	27
LD66S (9W&12W)	120x120	27
LD66S (15W&18W)	155x155	27
LD66S (24W)	190x190	27

ELECTRICAL & PACKING DATA

IP20

EOS Square

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Mains Current (Amp)	Case Lot (in Nos)
LD66S-670-XX-65-SM	6	240	0.02	100
LD66S-111-XX-65-SM	9	240	0.03	20
LD66S-151-XX-65-SM	12	240	0.05	20
LD66S-171-XX-65-SM	15	240	0.06	20
LD66S-221-XX-65-SM	18	240	0.07	20
LD66S-301-XX-65-SM	24	240	0.10	20
LD66S-670-XX-40-SM	6	240	0.02	100
LD66S-111-XX-40-SM	9	240	0.03	20
LD66S-151-XX-40-SM	12	240	0.05	20
LD66S-171-XX-40-SM	15	240	0.06	20
LD66S-221-XX-40-SM	18	240	0.07	20
LD66S-301-XX-40-SM	24	240	0.10	20

CCT *65 stands for 6500K, *40 stands for 4000K.



EOS ROUND

Surface mounted Rimless LED downlight

- Bezel less design with edge to edge lighting creating great aesthetics.
- PS with aluminium heat sink for lighter weight and durability.
- High transmissivity PC diffuser provides better output and weather resistance.
- High efficacy LEDs creating uniform and optimum light output.
- Specially designed, easy to install metal mounting bracket.
- Suitable for surface mounting on ceiling.
- Easy installation and long service life of 50,000 burning hrs as per L70B50.
- 2.5 KV Surge Protection (Built-In)

INSTALLATION

- Suitable for all ceiling systems.



CONTROL GEAR OPTION

- Integral LED driver.


APPLICATIONS



DIMENSIONAL DRAWING:

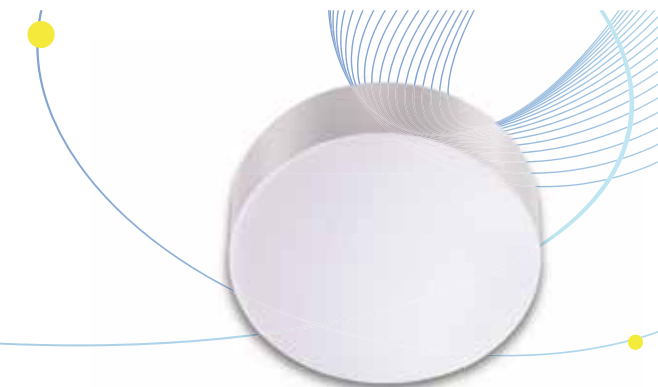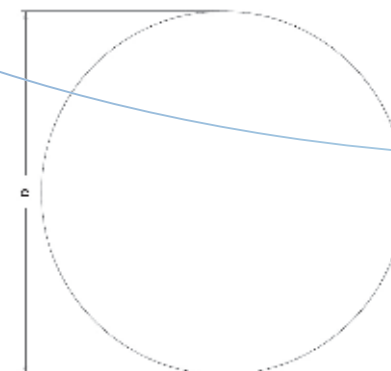

Available in



Product	D (mm)	H (mm)
LD66R (6W)	Φ90	27
LD66R (9W&12W)	Φ120	27
LD66R (15W&18W)	Φ155	27
LD66R (24W)	Φ190	27

ELECTRICAL & PACKING DATA

IP20

EOS ROUND

Catalogue Reference No.	Wattage (W)	Rated Voltage V	Mains Current (Amp)	Case Lot (in Nos)
LD66R-670-XX-65-SM	6	240	0.02	100
LD66R-111-XX-65-SM	9	240	0.03	20
LD66R-151-XX-65-SM	12	240	0.05	20
LD66R-171-XX-65-SM	15	240	0.06	20
LD66R-221-XX-65-SM	18	240	0.07	20
LD66R-301-XX-65-SM	24	240	0.10	20
LD66R-670-XX-40-SM	6	240	0.02	100
LD66R-111-XX-40-SM	9	240	0.03	20
LD66R-151-XX-40-SM	12	240	0.05	20
LD66R-171-XX-40-SM	15	240	0.06	20
LD66R-221-XX-40-SM	18	240	0.07	20
LD66R-301-XX-40-SM	24	240	0.10	20

CCT *65 stands for 6500K, *40 stands for 4000K.



C Y L I N D R O

Surface Downlight

From functional downlight to museum exhibits, it is nothing without dramatic lighting. Let Cylindro shine a light on it all.

- Great aesthetics amping up the display.
- Aluminum die-cast body providing effective heat dissipation.
- High efficacy reflector optics providing uniform distribution.
- Easy handling providing fast installation.
- Long life COB chip.
- High surge protection of 2.5 Kv.

APPLICATIONS



DIMENSIONAL DRAWINGS:



20W



6W



10W

All dimensions are in mm. | Tolerance ±5mm

INSTALLATION

Surface mounted accessories supplied with product

CONTROL GEAR OPTION

Inbuilt electronic LED Driver

Available Beam Angles

24° 38°

Available in



ELECTRICAL DATA

IP20

CYLINDRO

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD11-520-24-30-XX	6W	240	0.02	20
LD11-101-24-30-XX	10W	240	0.04	20
LD11-201-38-30-XX	20W	240	0.09	20

*30 - Stands for 3000K, 40 - Stands for 4000K, 65 - Stands for 6500K

*24 stands for 24° beam angle and 38 stands for 38° beam angle

GLITZ LED

New age COB downlighter which creates contemporary spaces.



- Adjustable head creates visual interest.
- Aluminium die cast body for effective thermal management.
- High power high lumen output LED.
- High efficiency reflector optics.
- Comes with Cree chip.
- 80 CRI ensures true colour rendering.
- Long life 50,000 burning hours as per L70.
- 2,5 KV SPD

APPLICATIONS




INSTALLATION

- Suitable for Armstrong/CRG/TRAC/USG/ Celotex/POP modular ceiling system.

CONTROL GEAR OPITON

- Electronic LED driver.


Available in



Available Beam Angle



DIMENSIONAL DRAWINGS:

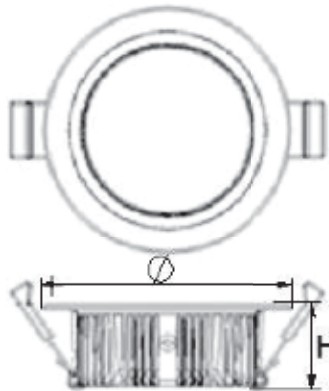

Parameter	6W	9W	12W	15W	18W
Height	55mm	55mm	65mm	65mm	70mm
Dia	90mm	90mm	109mm	109mm	140mm
Ceiling Cutout	75mm	75mm	95mm	95mm	120mm

All dimensions are in mm. Tolerance ± 2mm.

ELECTRICAL & PACKING DATA

IP20

GLITZ LED

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD98-900-024-40-XX	6W	240	0.026	50
LD98-131-024-40-XX	9W	240	0.039	50
LD98-181-024-40-XX	12W	240	0.052	40
LD98-221-024-40-XX	15W	240	0.065	40
LD98-271-024-40-XX	18W	240	0.078	24

- Also available in 3000K and 36° beam angle.
- To order 3000K, replace 30 with 40 in the above catalogue no.
- To order 36° beam angle, replace 24 with 36.



S O L A S

Deep Recessed Trimless Downlight

- Trimless design.
- Low glare, deep inset COB with clear diffuser and high efficiency reflector optic.
- Die cast aluminum front ring in white colour and heatsink powder coated in black colour.

- Specially designed, easy to install sturdy metal mounting clips.
- 80 CRI ensures true colour rendering.
- Long life 50,000 burning hours as per L70B50.
- 2.5 KV SPD

APPLICATIONS



34


INSTALLATION

- Suitable for Armstrong/CRG/TRAC/USG/Celotex /POP modular ceiling system.

CONTROL GEAR OPTION

- Electronic LED driver.

PRODUCT DIMENSIONS:

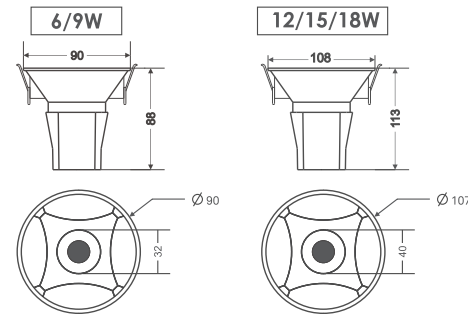

Technical drawings showing dimensions for two models:

- 6/9W Model:** Ceiling cutout: $\varnothing 82\text{mm}$. Dimensions: 90mm (top width), 88mm (height), 32mm (bottom width).
- 12/15/18W Model:** Ceiling cutout: $\varnothing 98\text{mm}$. Dimensions: 108mm (top width), 113mm (height), 40mm (bottom width).

Ceiling cutout:- $\varnothing 82\text{mm}$.
All dimensions are in mm.
Tolerance $\pm 2\text{mm}$.

Ceiling cutout:- $\varnothing 98\text{mm}$.



Available in



Available Beam Angle



ELECTRICAL DATA

IP20

SOLAS

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD47-670-024-30-WH	6W	240	0.03	50
LD47-111-024-30-WH	9W	240	0.04	50
LD47-151-024-30-WH	12W	240	0.05	40
LD47-171-024-30-WH	15W	240	0.07	40
LD47-221-024-30-WH	18W	240	0.08	24

CCT *40 stands for 4000K, *30 stands for 3000K.
Beam angle *024 stands for 24°, *036 stands for 36°.

35



S L E E K

Track light

- Slim design and multiple colours, ideal for multiple applications, enhancing the overall interior.
- Aluminum extruded body, powder coated in white or black colour and plastic moulded gear box.
- Ensures proper mounting on track. Suitable for T2 track channel.

- Deep inset COB with clear diffuser and high efficiency lens.
- Integral track adaptor with special track locking system, which ensures proper mounting.
- 80 CRI ensures true colour rendering.
- Long life 50,000 burning hours as per L70B50.
- 2.5 KV SPD

APPLICATIONS



36

INSTALLATION

- Suitable for Armstrong/CRG/TRAC/USG/Celotex /POP modular ceiling system

CONTROL GEAR OPTION

- Electronic LED driver

Available in

Available Beam Angle

36°

PRODUCT DIMENSIONS:

All dimensions are in mm.
Tolerance ± 2 mm.

ELECTRICAL DATA

IP20

SLEEK

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD48-101-036-40-WH	10	240	0.04	20
LD48-171-036-40-WH	15	240	0.07	12
LD48-221-036-40-WH	20	240	0.09	12

CCT *40 stands for 4000K,*30 stands for 3000K.

Beam angle *036 stands for 36°.

Suffix WH stands for white colour and suffix BL stands for black colour.

37


ATOM Spot light

wipro

- Strong light output, ideal for highlighting.
- Body made up of aluminum die cast in white colour.
- Diffused lens with prism.

- Specially designed, easy to install SS clips.
- Driver pre-wired up to terminal block.

APPLICATIONS

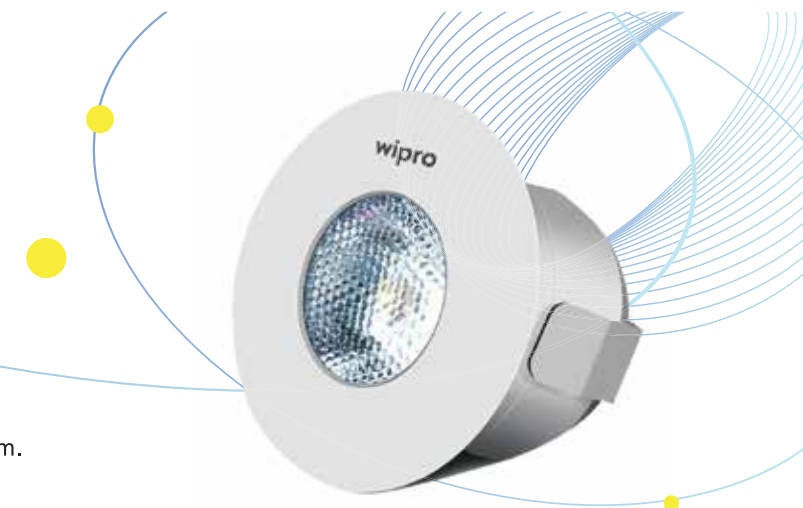

INSTALLATION

- Suitable for Armstrong/CRG/TRAC/USG/Celotex /POP modular ceiling system.


CONTROL GEAR OPTION

- Electronic LED driver.

Available in



PRODUCT DIMENSIONS & MOUNTING DETAILS

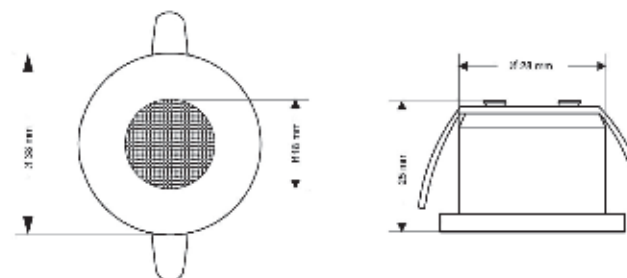

All dimensions are in mm. Tolerance ± 2 mm. Ceiling cutout: $\varnothing 28$ mm.

ELECTRICAL DATA

IP20

ATOM

Catalogue Reference No.	CCT	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LD38-100-XXX-65-XX	6500K	1W	240	0.004	50
LD38-100-XXX-40-XX	4000K				
LD38-100-XXX-30-XX	3000K				
LD38-150-XXX-65-XX	6500K	2W	240	0.008	50
LD38-150-XXX-40-XX	4000K				
LD38-150-XXX-30-XX	3000K				
LD38-200-XXX-65-XX	6500K	2W	240	0.013	50
LD38-200-XXX-40-XX	4000K				
LD38-200-XXX-30-XX	3000K				

READING LAMP

Wipro's Reading Lamp has a flexible arm, and high efficiency LEDs, making it a great addition to your work desk and focusing even easier.

- Long life with Aluminum housing powder coated in white
- Flexible arm for maximum convenience
- Focused light distribution for readability
- Can be wall or table mounted

APPLICATIONS



HOSPITALITY



RESORTS



HEALTHCARE



HOSTELS



OFFICE CABINS


INSTALLATION

Wall mounted accessories supplied with product

CONTROL GEAR OPTION

Inbuilt integrated electronic LED Driver

DIMENSIONAL DRAWINGS:

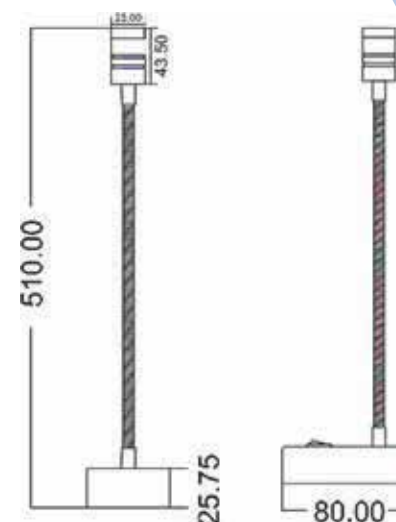

All dimensions are in mm. | Tolerance ± 2 mm

Available in



ELECTRICAL DATA				IP20
READING LIGHT				
Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LJ14-020-XXX-30-OP	3W	240	0.013	20
LJ14-020-XXX-40-OP	3W	240	0.013	20
LJ14-020-XXX-65-OP	3W	240	0.013	20

*30 - Stands for 3000K, 40 - Stands for 4000K, 65 - Stands for 6500K

STEP LIGHT



APPLICATIONS



Minimalistic in nature, the lighting does not interfere with the ambience and provides a gentle glow at the foot level, without disturbing the dark of the night.

- Excellent heat dissipation through aluminum die cast housing with grey powder coating
- Long life with metal clad PCB

INSTALLATION


External Mounting provision on product with recess removable wall mounted back cover

CONTROL GEAR OPTION

In Built electronic LED Driver


- High purity integrated Diffuser with high precision light output
- Constant Current Driver
- High protection of 2.5 Kv

DIMENSIONAL DRAWINGS:

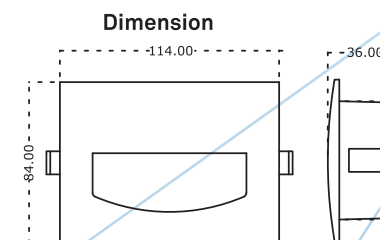

All dimensions are in mm. | Tolerance ± 5 mm

Available in



ELECTRICAL DATA

STEP LIGHT

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LT53-260-XXX-40-XX	6W	240	0.025	10
LT53-260-XXX-30-XX	6W	240	0.025	10
LT53-260-XXX-65-XX	6W	240	0.025	10

*30 - Stands for 3000K, 40 - Stands for 4000K, 65 - Stands for 6500K



L E D T U B E

Running a business means making every rupee count and our range of Pro LED Lamps take that to heart. Highly efficient, they're also well protected for longer service life and offer optimized light output.

PRO LED LAMPS

PRO LED LAMP



APPLICATIONS



Linear lamp with PC/metal housing for optimum light output. Specially designed diffuser to avoid direct view of LEDs.


- High efficiency LEDs for optimum light output and savings in power.
- Specially designed PC/metal housing for excellent heat dissipation.
- Excellent design ensures uniform lighting and avoids direct view of LEDs.

- Short circuit and surge protection for enhanced reliability and longer service life of driver.


CONTROL GEAR

- In-built Electronic LED driver.
- One side AC input connection (LL13-181-65SESL1).

DIMENSIONAL DRAWINGS:



All dimensions are in mm. Tolerance ± 2 mm




*AC input (240V, 50Hz) to be given only to terminals where the Wipro mark is present on the lamp cap.



ALUMINIUM BOX CHANNEL FOR TUBE

Catalogue Reference No.	Material	Length mm	No of Tubes	Case Lot(In Nos)
WIO921208P	CRCA Pre Coated	1200	1	20
WIO922208P	CRCA Pre Coated	1200	2	20
WIO921208	CRCA Powder Coated	1200	1	20
WIO922208	CRCA Powder Coated	1200	2	20

Available in



ELECTRICAL & PACKING DATA

IP20

PRO LED LAMP

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)	Input	Housing	Length (mm)
LL13-181-650/G1	18W	240	0.09	20	One Side	PC	1200
LL13-181-65SE/G1	20W	240	0.09	20	One Side	Aluminium	1200
LL13-181-65SESL/G1	20W	240	0.09	20	Two Sides	PC	1200
LL13-181-65SESL1/G1	20W	240	0.09	20	One Side	PC	1200

For 4000K CCT replace 65 with 40 in catalogue reference no.



TRIM NEO FAMILY

B A T T E N

Our batten range is the best investment you will make for your interiors. Not only are they efficient in lighting up your office space but also guarantee savings on power consumption.



T R I M N E O B A T T E N

APPLICATIONS



Sleek and seamless profiled extruded aluminium/polycarbonate batten with an efficient diffuser to illuminate work and retail spaces.

- High efficiency LEDs for optimum light output and savings in power.
- Specially designed extruded aluminum/polycarbonate housing.
- High optically efficient diffuser.
- Excellent design ensures uniform lighting and avoids direct view of LEDs.


INSTALLATION

- Mounting SS clamp provided with product.

CONTROL GEAR

- Electronic LED driver.

DIMENSIONAL DRAWINGS:

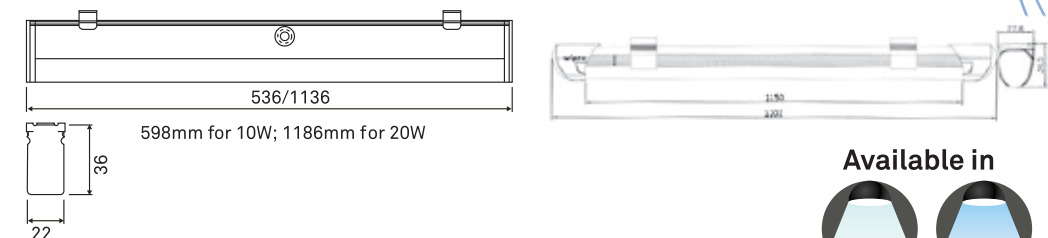

All dimensions are in mm. Tolerance ± 2 mm.

ELECTRICAL & PACKING DATA

IP20

Trim Neo						
Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	MainCurrent (A)	Case Lot (Nos)	Housing	Length (mm)
LL20-620-XXX-65NE3	5	240	0.02	20	PC	300
LL20-111-XXX-65NE3	10	240	0.04	20	PC	600
LL20-221-XXX-65NE3	20	240	0.08	20	PC	1200
LL20-111-XXX-65AL1	10	240	0.04	20	Aluminium	600
LL20-281-XXX-65AL1	20	240	0.09	20	Aluminium	1200
LL20-221-XX-65ALNE	20	240	0.09	20	Aluminium	1200
LL22-511-XXX-65-G1	36	240	0.15	20	Aluminium	1200

For 4000K CCT replace 65 with 40 in catalogue reference no.

TRIM LED SENSO BATTEN

Linear LED Batten with occupancy sensor

APPLICATIONS



An intelligent and intuitive lighting system that detects the presence of a person through a smart, built-in motion sensor. It minimizes energy consumption and enables higher savings by optimally lighting the space during zero occupancy.

- High durability and longer life with aluminium extruded anodized housing and plastic ABS endcap in grey.
- High optically efficient polycarbonate diffuser for uniform glare free lighting Technology edge with high efficacy LEDs for optional light output.
- Inbuilt occupancy sensor powered with microwave technology : During zero occupancy, light output will be dimmed to 30% at 6W.
- Great energy savings.
- Covers upto 7 meters with 120° detection.

INSTALLATION

- Luminaire is suitable for surface mounting on ceiling/wall using 2 mounting clamps supplied along with the product.


CONTROL GEAR

- In-built Electronic LED driver and sensor.

Available in



DIMENSIONAL DRAWING:

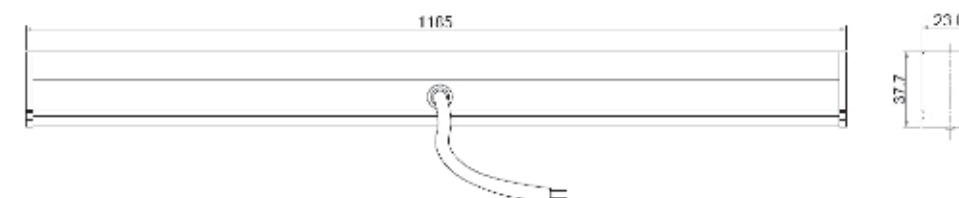

All dimensions are in mm. Tolerance: ± 2 mm.

ELECTRICAL DATA

IP20

TRIM LED

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Mains Current (A)	Case Lot	Housing	Length (mm)
LL28-281-SN-65-XX	20	240	0.08	20	Aluminium	1200



**L E D
S T R I P
L I G H T**

Enhance the decor of your interiors and add zest in your functional light. Elevate the overall aesthetic contemplation.

FORMZ

- Solid state high brightness SMD led chips.
- Formz LED is used to highlight different shapes and areas of cove/niche.
- High efficiency, long life LEDs.
- Minimal heat generation from the strips avoids blackening in coves.
- Freedom from lamp and accessories replacement.

INSTALLATION

- Designed for installation by adhesive back peel for easy installation.

CONTROL GEAR

- External Constant Voltage driver.

APPLICATIONS



Non-integral flexible LED strip light with high brightness for indoor and outdoor applications. The strip can be cut at marked intervals to suit the desired length.

Available in



DRIVER	
Catalogue Reference No.	Driver Wattage
LG40-024	5W
LG40-050	10W
LG40-078	15W

ELECTRICAL & PACKING DATA			IP20
FORMZ			
Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	CCT
LS06-005-120-30-50	5W	12	3000
LS06-005-120-40-50	5W	12	4000
LS06-005-120-65-50	5W	12	6500
LS06-010-120-30-50	10W	12	3000
LS06-010-120-40-50	10W	12	4000
LS06-010-120-65-50	10W	12	6500
LS06-015-120-30-50	15W	12	3000
LS06-015-120-40-50	15W	12	4000
LS06-015-120-65-50	15W	12	6500



O U T D O O R L I G H T I N G

Creativity thrives in safe environments. Let our range of outdoor lights brighten every corner of your business.

MOON LED
BUSH LIGHT
BULKHEAD
EXTERIO WALL LIGHTS
ALPHA NEO FLOODLIGHT
SKYLINE NEO





APPLICATIONS




- Aluminium die cast housing with grey powder coating.
- Metal clad PCBs for long thermal life.
- Technically advanced polycarbonate diffuser for reduced glare.
- Easy-to-mount on true ceiling and quick to service.
- Electronic control gear duly wired up to the terminal block.

CONTROL GEAR OPTION

- Electronic LED driver.

DIMENSIONAL DRAWINGS & DETAILS:

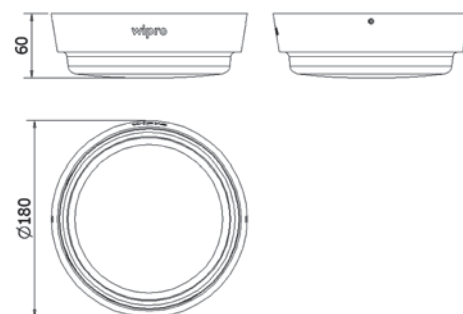

All dimensions are in mm.
Tolerance ± 2 mm.


INSTALLATION

- Provision for mounting on wall with the help of specially designed mounting bracket & hardware (provided with the product). Cable entry provision is from the top/side.

ACCESSORIES: (supplied along with the product)

- 3 way 5 amp connector provided for quick connections with extended wire 100-150mm out of luminaire.

Available in



ELECTRICAL & PACKING DATA

IP65

MOON LED

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Approx.Weight (KG)	Case Lot (Nos)
LW21-111-XXX-57-XX	10	240	0.04	1	10
LW21-111-XXX-40-XX	10	240	0.04	1	10

57 stands for 5700K and 40 stands for 4000K.

BUSH LIGHT

Whether it is night time garden décor or safety of visitors, Cleanray's landscape lighting can unarguably change the game for both. Presenting Exterio Bush Light by Cleanray, the preferred choice for aesthetic spike LED lighting!



- Long service life with 30,000 burning hours as per L70B50
- Efficient heat dissipation with aluminum die cast housing with grey powder coating
- Highly advanced LED
- High efficiency reflector optics
- Integrated 60° beam angle for wider coverage
- Constant current driver
- Higher PF & Lower THD
- No corrosion
- 2.3 Kv surge protection
- Dust and water proof

APPLICATIONS




INSTALLATION

External spike mounted accessories supplied with product

CONTROL GEAR OPTION

Inbuilt electronic LED Driver

DIMENSIONAL DRAWINGS:

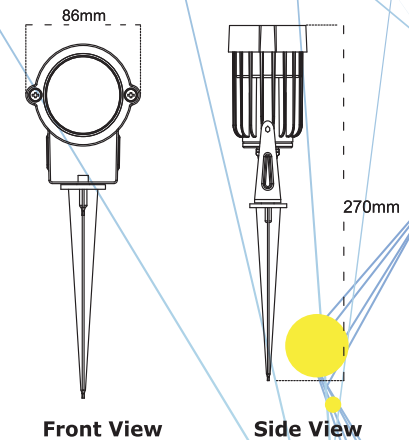

All dimensions are in mm. | Tolerance ± 5 mm

Available in



ELECTRICAL DATA				IP65
BUSH LIGHT				
Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LF05-800-040-30-XX	10W	240	0.04	10
LF05-800-040-40-XX	10W	240	0.04	10
LF05-800-040-65-XX	10W	240	0.04	10

*30 - Stands for 3000K, 40 - Stands for 4000K, 65 - Stands for 6500K

BULKHEAD

Long-lasting lights that brighten up outdoors as well as indoors! These high-performing lights provide a robust lighting style for outdoors as well as large indoor areas. Bulkhead lights are designed to be tough to withstand dust and water.



- Housing in Black colour and opaque diffuser made up of engineering plastic
- High efficiency, long life, LEDs.
- Complete assembly and accessories prewired up to terminal block.
- Dust and water proof.

APPLICATIONS



CAMPUS
LIGHTING



RESORTS



PARKS AND
GARDENS



INDUSTRIAL



PARKING


INSTALLATION

- Suitable for Wall/ Surface mounting
- Mounting clamp is provided with product

CONTROL GEAR OPTION


Inbuilt electronic LED Driver

DIMENSIONAL DRAWINGS:

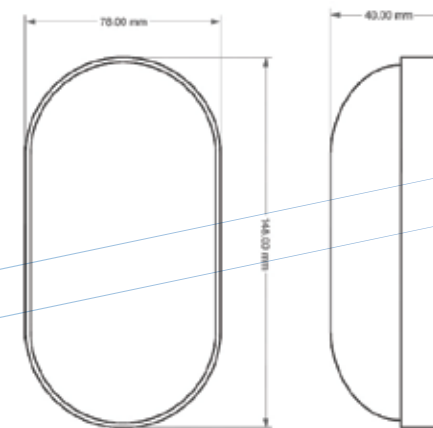

All dimensions are in mm. | Tolerance ± 2 mm

Available in



ELECTRICAL DATA

IP65

BULKHEAD

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LW19-141-XXX-65-XX	10W	240	0.04	10
LW19-141-XXX-40-XX	10W	240	0.04	10

*40 - Stands for 4000K, 65 - Stands for 6500K



E X T E R I O

Wall Lights

Architectural and landscape lighting just got a single, elegant solution: Exterio Wall Lights. Perfect for both purposes of visual safety and visual appeal, the Exterio Wall Lights are wall-mounted, fitted with high-performing LEDs, and rugged enough to survive for long years in an outdoor setting

APPLICATIONS



CAMPUS LIGHTING



RESORTS



PARKS AND GARDENS



ARCHITECTURAL

INSTALLATION

External wall mounted accessories supplied with product

CONTROL GEAR OPTION

Inbuilt electronic LED Driver


- Aluminum die cast housing duly powder coated in gray colour
- High efficacy LEDs
- High efficiency lens optics
- IP65
- Multiple design options

Available in




DIMENSIONAL DRAWINGS:

RECTANGULAR WALL LIGHT

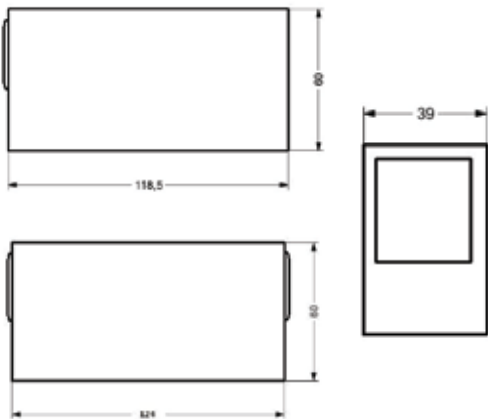

TRIANGULAR WALL LIGHT

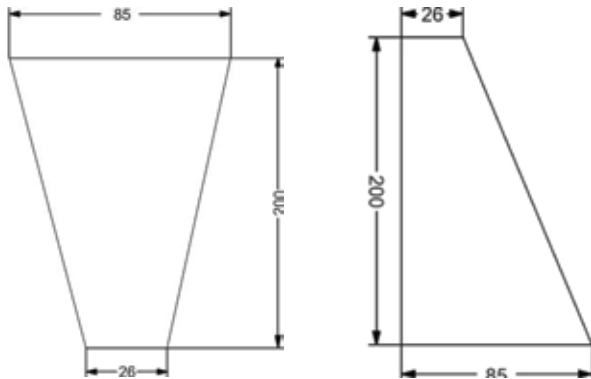

ELECTRICAL DATA

IP65

EXTERIO WALL LIGHTS

Catalogue Reference No.	Shape	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LW23-520-XXX-30-XX	Rectangle	5W	240	0.02	20
LW23-520-XXX-40-XX	Rectangle	5W	240	0.02	20
LW23-520-XXX-65-XX	Rectangle	5W	240	0.02	20
LW23-101-XX-30-UDX	Rectangle	10W	240	0.04	20
LW23-101-XX-40-UDX	Rectangle	10W	240	0.04	20
LW23-101-XX-65-UDX	Rectangle	10W	240	0.04	20
LW23T-101-X-30-UDX	Triangle	10W	240	0.04	20
LW23T-101-X-40-UDX	Triangle	10W	240	0.04	20
LW23T-101-X-65-UDX	Triangle	10W	240	0.04	20

*30 - Stands for 3000K, 40 - Stands for 4000K, 65 - Stands for 6500K

*UDX stands for UpDown Light and XX stands for Updown Only

E X T E R I O

Wall Lights

Architectural and landscape lighting just got a single, elegant solution: Exterio Wall Lights. Perfect for both purposes of visual safety and visual appeal, the Exterio Wall Lights are wall-mounted, fitted with high-performing LEDs, and rugged enough to survive for long years in an outdoor setting

APPLICATIONS



CAMPUS
LIGHTING



RESORTS



PARKS AND
GARDENS



ARCHITECTURAL

INSTALLATION

External wall mounted accessories supplied with product

CONTROL GEAR OPTION

Inbuilt electronic LED Driver


- Aluminum die cast housing duly powder coated in gray colour
- High efficacy LEDs
- High efficiency lens optics
- IP65
- Multiple design options

Available in




DIMENSIONAL DRAWINGS:

CIRCULAR WALL LIGHT

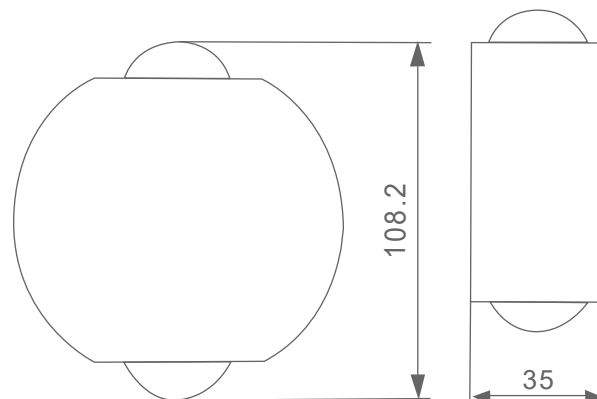

SQUARE WALL LIGHT

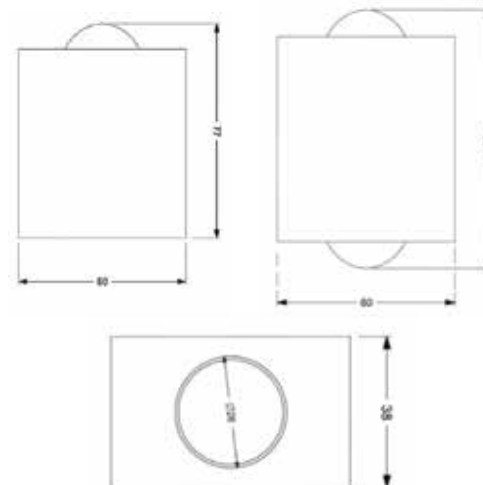

ELECTRICAL DATA

IP65

EXTERIO WALL LIGHTS

Catalogue Reference No.	Shape	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LW22-150-XXX-30-XX	Square	5W	240	0.02	20
LW22-150-XXX-40-XX	Square	5W	240	0.02	20
LW22-150-XXX-65-XX	Square	5W	240	0.02	20
LW22-300-XX-30-UDX	Square	10W	240	0.04	20
LW22-300-XX-40-UDX	Square	10W	240	0.04	20
LW22-300-XX-65-UDX	Square	10W	240	0.04	20
LW22C-101-X-30-UDX	Circle	10W	240	0.04	20
LW22C-101-X-40-UDX	Circle	10W	240	0.04	20
LW22C-101-X-65-UDX	Circle	10W	240	0.04	20

*30 - Stands for 3000K, 40 - Stands for 4000K, 65 - Stands for 6500K

*UDX stands for UpDown Light and XX stands for Updown Only

ALPHA NEO

Flood light



- LED floodlight is elegant, architectural and modern in design.
- Specially designed polycarbonate lenses ensures better light distribution.
- Aluminium die cast housing, black powder coated.
- White optics reflector for superior performance.
- Toughened glass with silicon gaskets for IP66 Protection.
- Complete assembly with LED, driver with extended pre-wired outside the luminaire.
- Integral control gear compartment.
- Long life 50,000 burning hours as per L70.
- 4 KV SPD


APPLICATIONS



70



Available in




INSTALLATION

- External cradle adjustable mounting arrangement, suitable for mounting with 2 nos. M8/5/16' bolts.


CONTROL GEAR

- In-built integrated Electronic LED driver.


DIMENSIONAL DETAILS:



20W | 30W | 40W



50W



100W

All dimensions are in mm.
Tolerance ± 5 mm.

ELECTRICAL DATA

IP66

ALPHA NEO

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LF37-251-XXX-65-XX	20	240	0.09	10
LF37-371-XXX-65-XX	30	240	0.13	10
LF37-501-XXX-65-XX	40	240	0.18	10
LF37-621-XXX-65-XX	50	240	0.21	04
LF37-501-XXX-65-XX	100	240	0.43	04

71

**S K Y L I N E
N E O**

LED Streetlight

- Aluminium pressure die cast housing, powder coated in black colour.
- High efficiency, long life LEDs.
- High purity polycarbonate cover with integrated optics for superior performance.
- Complete assembly with LED, driver with extended pre-wired outside the luminaire.
- Long life 50,000 burning hours as per L70.
- 4 KV SPD

APPLICATIONS

Available in


INSTALLATION

- Suitable for external pole dia. 35mm to 43mm.

CONTROL GEAR

- In-built integrated Electronic LED driver.

DIMENSIONAL DETAILS:

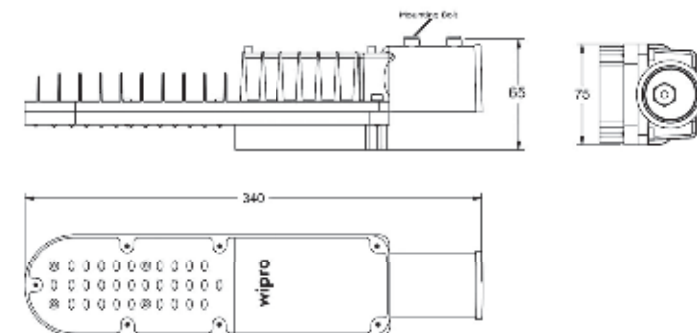

All dimensions are in mm.
Tolerance ± 5 mm.

ELECTRICAL DATA

IP66

SKYLINE NEO

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LR26-251-XXX-65-XX	20	240	0.09	04
LR26-371-XXX-65-XX	30	240	0.13	04



S
K
Y
L
I
N
E

N
E
O

LED Streetlight


- Aluminium pressure die cast housing, powder coated in black colour.
- High efficiency, long life LEDs.
- High purity polycarbonate cover with integrated optics for superior performance.

- Complete assembly with LED, driver with extended pre-wired outside the luminaire.
- Long life 50,000 burning hours as per L70.
- 4 KV SPD

APPLICATIONS



74

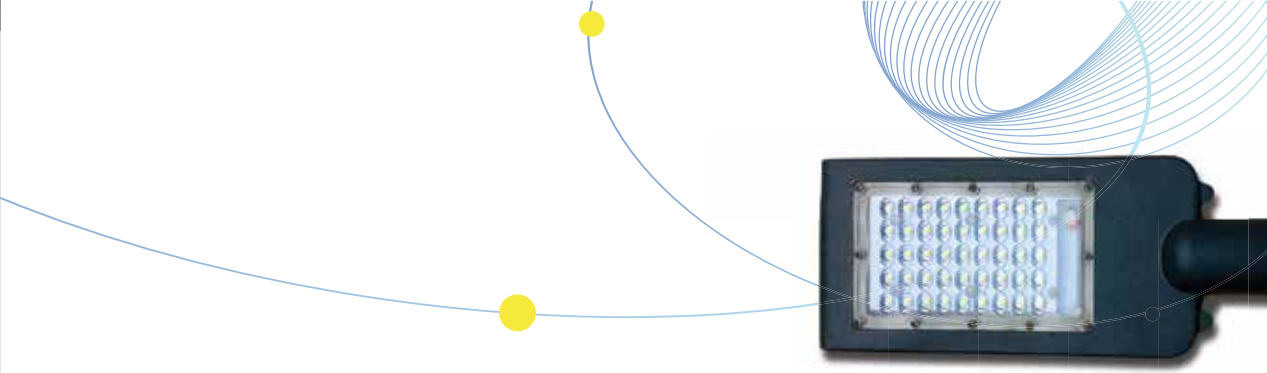

Available in

4000K

6500K


INSTALLATION

- Suitable for external pole dia. 35mm to 43mm.

CONTROL GEAR


- In-built integrated Electronic LED driver.

DIMENSIONAL DETAILS:

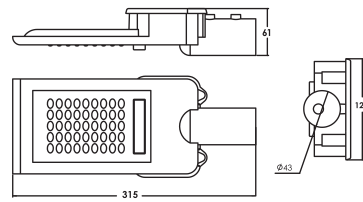

All dimensions are in mm. Tolerance ± 3 mm.

50W

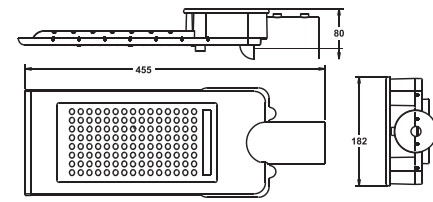

All dimensions are in mm. Tolerance ± 3 mm.

100W

ELECTRICAL DATA

IP66

SKYLINE NEO

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LF37-621-XXX-65-XX	50	240	0.21	04
LF37-501-XXX-65-XX	100	240	0.43	04

75



B U L B

We've always believed that good things come in small packages and our Brillante bulbs are the perfect combination of elegance and efficiency, ready to work tirelessly through day and night.

BRILLANTE






B R I L L A N T E

LED lamps

- White plastic molded body with aluminum heat sink.
- Polycarbonate diffuser.
- Long burning life of 15000 hrs.
- Surge protection 3.5 KV.
- Compact body and uniform light distribution.
- Suitable for B22 type lamp holder.
- Directional lighting with high efficacy LEDs.

APPLICATIONS

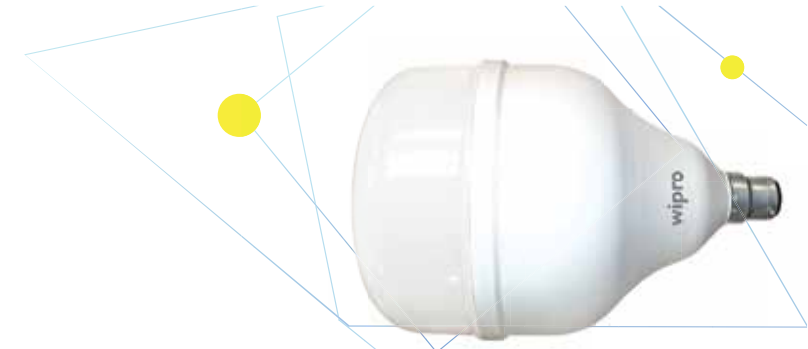


INSTALLATION

- Suitable for indoor application

Available in



DIMENSIONAL DRAWINGS:

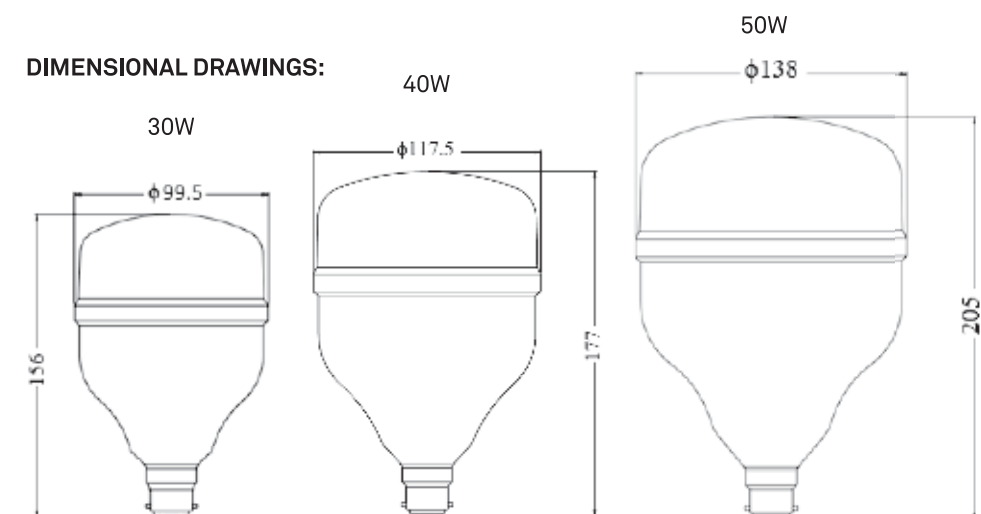

All dimensions are in mm. Tolerance ± 2 mm.

ELECTRICAL DATA

IP20


BRILLANTE

Catalogue Reference No.	Wattage (W)	Rated Voltage (V)	Main Current (A)	Case Lot (Nos)
LL26-371-65-B22	30	240	0.13	6
LL26-501-65-B22	40	240	0.17	6
LL26-621-65-B22	50	240	0.21	6

33 YEARS OF WIPRO LIGHTING

CELEBRATING A JOURNEY THAT IS NOW DEFINING THE FUTURE OF LIGHTING

At Wipro, innovation is in our DNA. Our leading-edge technology and customer-centric approach, come together to provide intelligent lighting solutions across segments such as manufacturing, healthcare, outdoor, offices and much more. Recognized globally for thought-leadership and expert solutions, Wipro Lighting has been leading the category with excellence for the last 30 years!

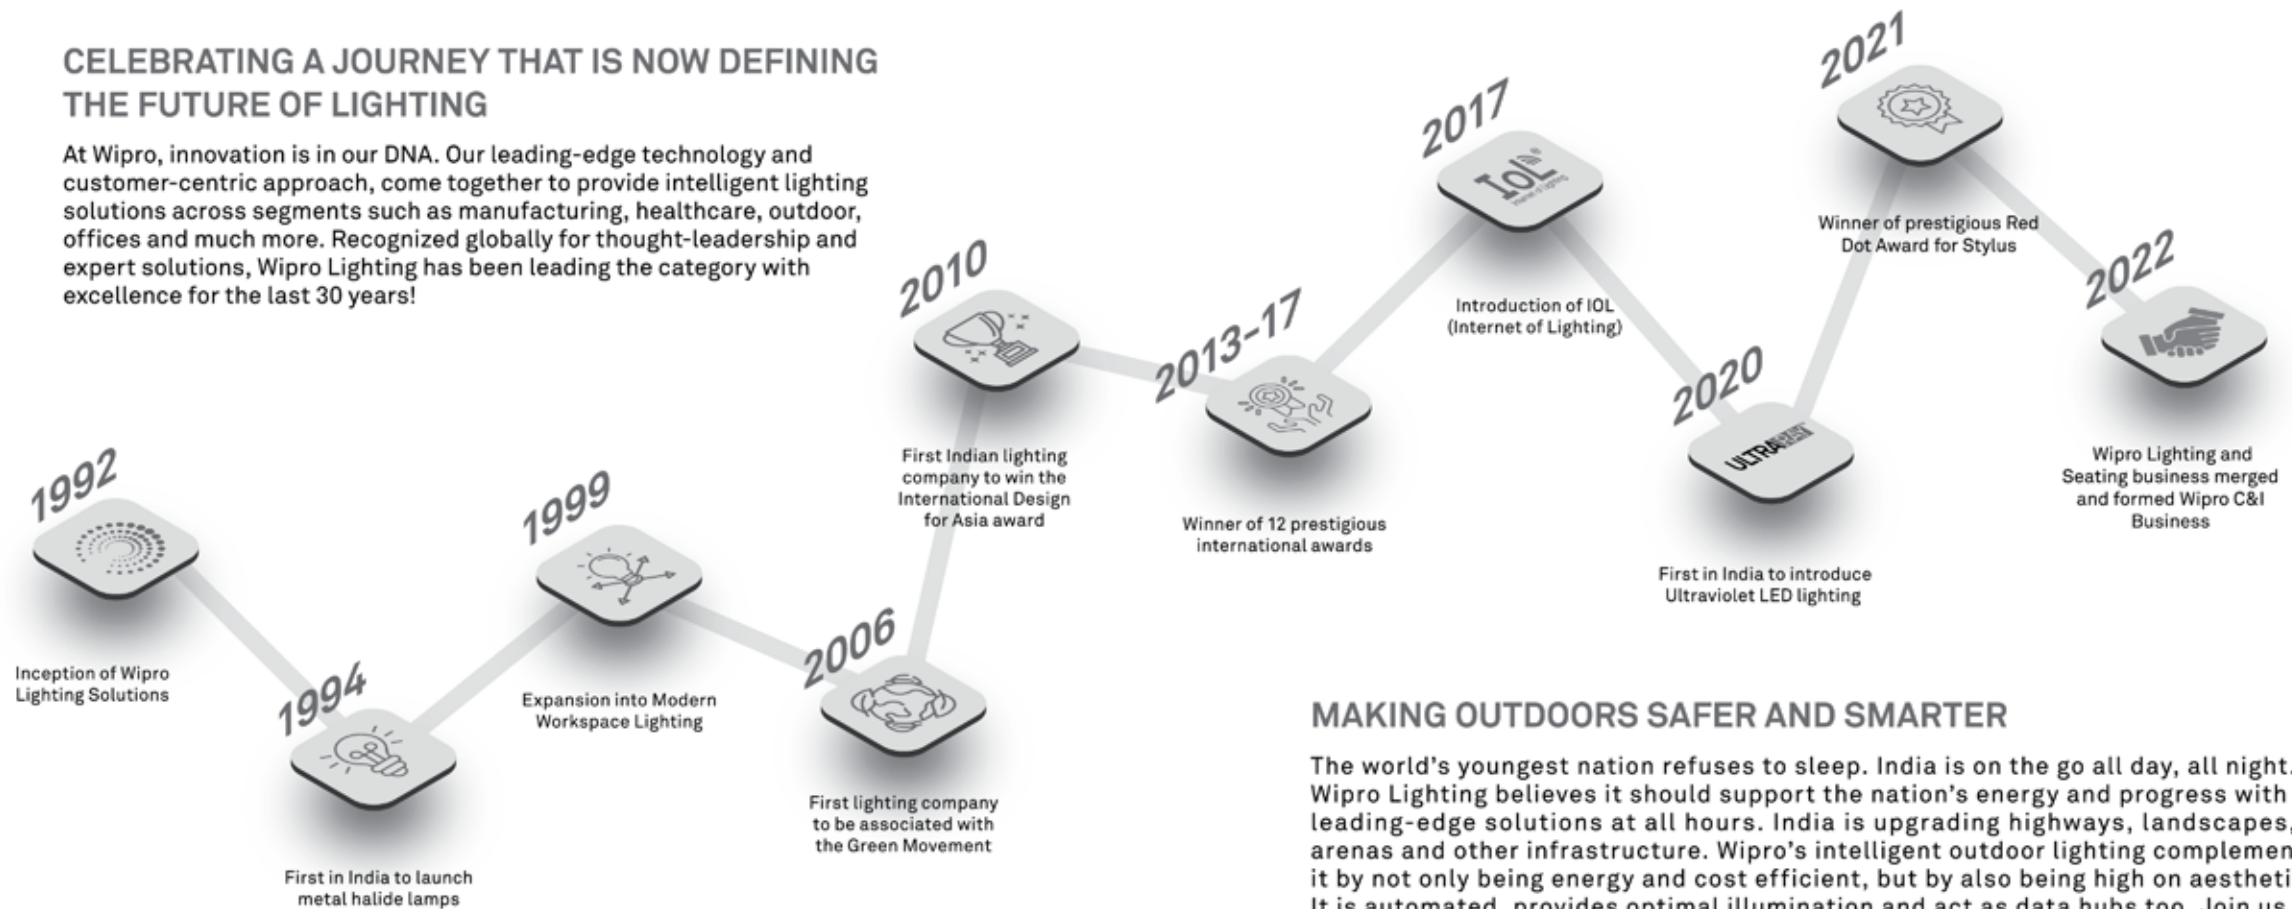

MAKING OUTDOORS SAFER AND SMARTER

The world's youngest nation refuses to sleep. India is on the go all day, all night. Wipro Lighting believes it should support the nation's energy and progress with its leading-edge solutions at all hours. India is upgrading highways, landscapes, arenas and other infrastructure. Wipro's intelligent outdoor lighting complements it by not only being energy and cost efficient, but by also being high on aesthetics. It is automated, provides optimal illumination and act as data hubs too. Join us in building the blocks of India. Come, experience the future with us.